

Product Guide and Price List

Valid from 1 May 2017
(Prices exclusive of VAT)



Geberit Mapress Stainless Steel

Geberit Mapress Carbon Steel

Geberit Mapress Copper

Geberit Pipe Valve Fittings

Appendix

Swiss precision, spirit of innovation and art of engineering

Since the day it all began in 1874 in Switzerland, we have been defined by our experiences. Geberit has been among the pioneers of the industry and is still setting trends with comprehensive system solutions.

Those who use Geberit systems are playing safe. No uncertainties that can result when combining components from different manufacturers and no unnecessary material costs and installation workload. In addition, Geberit systems offer maximum reliability and economic viability, and cause a minimum of environmental impact.

Geberit Mapress Pressing Technology

Geberit Mapress is a metal pressing system that provides an efficient, safe, and reliable solution for a range of different job requirements. To ensure a safe and long lasting connection the fitting and pipe are pressed once the pipe has been inserted to the required insertion depth.

Reduce your down time and improve safety with Geberit Mapress

- The system can be fixed wet so no draining required
- Reduced flushing time due to a cleaner installation process
- No hot works and no cooling down period
- Unpressed joints leak during pressure test
- Coloured pressing indicators help identify the material and pressed fittings
- Protection end caps stop debris and dirt getting into the system

A little Know-how goes a long way

Geberit provide installer training at purpose built training academies in Warwick and Dublin – providing the Know-how for installers to feel confident in installing Geberit products.

At Geberit we have a dedicated technical support team on hand and ready to help. To contact us call 01926 516800 or email technical@geberit.co.uk

Geberit at your fingertips

Also available to you is the Geberit ProApp where you can get access to product specifications, installation instructions and videos. You can also identify any Geberit product simply by scanning its barcode



ProApp QR-Code for iTunes:




ProApp QR-Code for Play Store:



From beginning to end

With an in-depth range of products and systems, Geberit provides innovative solutions for water supply, use and drainage. Once installed, many Geberit products remain invisible to the end user. And they fulfil their function for many decades thanks to their high level of quality and reliability.

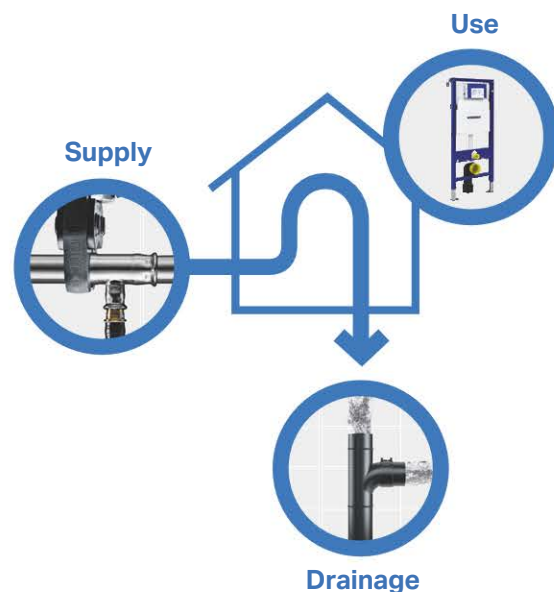





1. Geberit Mapress Stainless Steel



1.1	Preliminary remarks.....	9
	Application overview: Geberit Mapress Stainless Steel for liquid media	10
	Application overview: Geberit Mapress Stainless Steel for gaseous media . .	10
1.2	Geberit Mapress Stainless Steel	12
1.2.1	System pipes 1.4401	12
1.2.2	System pipes 1.4301	12
1.2.3	Pipe nipples	12
1.2.4	Couplings	13
1.2.5	Reducers.....	14
1.2.6	Bends	14
1.2.7	T-pieces.....	17
1.2.8	Adaptors, permanent.....	21
1.2.9	Adaptors and connections, detachable.....	25
1.2.10	Compensators	33
1.2.11	Feed-throughs	33
1.2.12	Sealings.....	33
1.2.13	Connections	34
1.3	Geberit Mapress Stainless Steel, Gas	36
1.3.1	System pipes 1.4401	36
1.3.2	Pipe nipples	36
1.3.3	Couplings	36
1.3.4	Reducers.....	37
1.3.5	Bends	38
1.3.6	T-pieces.....	40
1.3.7	Adaptors, permanent.....	43
1.3.8	Adaptors and connections, detachable.....	46
1.3.9	Sealings.....	49
1.3.10	Connections	50

1.4	Geberit Mapress Stainless Steel, silicone-free	52
1.4.1	System pipes 1.4401	52
1.4.2	System pipes 1.4521	52
1.4.3	Couplings	52
1.4.4	Reducers	53
1.4.5	Bends	54
1.4.6	T-pieces	55
1.4.7	Adaptors, permanent	58
1.4.8	Adaptors and connections, detachable	60
1.4.9	Sealings	67
1.4.10	Connections	67
1.4.11	Compensators	68
1.4.12	Feed-throughs	69
1.5	Geberit Mapress Stainless Steel, FKM, blue	70
1.5.1	System pipes 1.4401	70
1.5.2	System pipes 1.4521	70
1.5.3	System pipes 1.4301	70
1.5.4	Pipe nipples	71
1.5.5	Couplings	71
1.5.6	Reducers	72
1.5.7	Bends	72
1.5.8	T-pieces	76
1.5.9	Adaptors, permanent	79
1.5.10	Adaptors and connections, detachable	83
1.5.11	Sealings	88
1.5.12	Connections	88
1.5.13	Feed-throughs	88
1.6	Geberit Mapress Stainless Steel, accessories	89
1.6.1	Insulations for connectors	89
1.6.2	Caulks for pipes and fittings	89
1.6.3	Pipe fastenings	90
1.6.4	Connector fastenings	92
1.6.5	System seals	93
1.6.6	Sets of bolts for flange connections	96

1.1 Preliminary remarks

Introduction to Geberit Mapress Stainless Steel

Geberit Mapress Stainless Steel is especially suited for potable water installations as well as for open and closed heating and cooling circuits. There are special fittings available for gas installations, as well as solar and industrial applications.

Thanks to the pressing technology, installations can be carried out reliably and quickly without complex welding and soldering.

In addition to the standard Geberit Mapress Stainless Steel product range, LABS free fittings are also available.

Benefits of Geberit Mapress Stainless Steel

Quick

Lower labour costs in comparison to conventional connection technology

Clean

Extremely suitable for renovation of living areas
Seal rings are protected from dirt

Safe

No danger of fire as no welding or soldering necessary
Unpressed connections are easily identified
It is easy to distinguish between product materials using the indicator colours
Application ranges are easily identified by the plug colours
No danger of confusion with third-party products

Economical

No consumables such as oxygen or gas required

Simple

Simple connection technology

Universal

Can be used for surface-mounted and concealed installations

High molybdenum content

High resistance to corrosion due to 2.2% minimum Molybdenum content compared to the industry standard of 2%

Experienced

More than 30 years of practical experience in pressing technology

Always consider

The 6 stage pressing process

- Cut and deburr the pipe
- Mark the insertion depth on the pipe
- Prepare the fitting
- Insert the pipe in to the fitting
- Press with the appropriate jaw or collar
- Remove the pressing indicator

Check you are using the correct material for the required application. See page 10 - 11 for an in depth overview of the applications for Geberit Mapress Stainless Steel.

Only Geberit Mapress system pipes are suitable to press Geberit Mapress Stainless Steel fittings. To adapt on to existing or dissimilar materials you must use a threaded connection.

Use the correct tooling

Always check that you are using the correct tools, this can be checked in the Geberit Tooling Product Guide and Price List.

Make sure that the tools you are using are in a good condition and are calibrated. There should be a sticker on the tool, jaws, collars and adapters to tell you when the tool next needs calibrating. Go to www.geberit.co.uk/toolservice to find your nearest tool service agent.

If you require any technical assistance, please contact the technical department on 01926 516800, or email technical@geberit.co.uk.



Application overview: Geberit Mapress Stainless Steel for liquid media

Geberit Great Britain, version: November 2016

Application purposes	Operating temperature	Maximum operating pressure	Pipes			Fittings	
			CrNiMo steel 1.4401 / 316	CrMoTi steel 1.4521 / 444	CrNi steel 1.4301 / 304	CrNiMo steel 1.4401 / 316	Gunmetal
For cold and hot potable water	0–100 °C	16 bar / 1600 kPa	✓	✓		✓	✓
For heating water	0–100 °C	16 bar / 1600 kPa	✓	✓	✓	✓	✓
For cooling water without antifreeze agent	0–100 °C	16 bar / 1600 kPa	✓	✓	✓	✓	✓
For cooling water with antifreeze agent	-30 – +120 °C	16 bar / 1600 kPa	✓	✓	✓	✓	✓
For remote network heating water ≤ 120 °C	0–120 °C	16 bar / 1600 kPa	✓	✓	✓	✓	✓
For remote network heating water ≤ 140 °C	0–140 °C	16 bar / 1600 kPa	✓	✓	✓	✓	
For saturated steam ≤ 120 °C	0–120 °C	2 bar / 200 kPa	✓	✓	✓	✓	
For saturated steam ≤ 155 °C	5–155 °C	5 bar / 500 kPa	✓			✓	
For service water	0–100 °C	16 bar / 1600 kPa	✓	✓		✓	✓
For treated water	0–100 °C	16 bar / 1600 kPa	✓	✓		✓	
For rainwater with a pH value of > 6.0	0–100 °C	16 bar / 1600 kPa	✓	✓		✓	✓
For grey and black water with pH value > 6.0	0–100 °C	16 bar / 1600 kPa	✓	✓		✓	
For extinguishing water (wet)	0–70 °C	16 bar / 1600 kPa	✓			✓	✓
For extinguishing water (wet/dry, dry)	0–70 °C	16 bar / 1600 kPa	✓			✓	
For sprinklers (wet)	0–70 °C	16 / 10 bar 1600 / 1000 kPa	✓ ²⁾			✓	
For sprinklers (wet/dry, dry)	0–70 °C	16 / 10 bar 1600 / 1000 kPa	✓ ²⁾			✓	
For thermal media (solar)	-25 – +220 °C ¹⁾	16 bar / 1600 kPa	✓	✓	✓	✓	✓
For mineral oils	Upon request	Upon request	✓	✓	✓	✓	✓
For fuels	Upon request	Upon request	✓	✓	✓	✓	✓
For chemicals and technical liquids	Upon request	Upon request	✓ ³⁾	✓ ³⁾	✓ ³⁾	✓ ³⁾	✓ ³⁾

✓ Application generally approved if the defined additional requirements are met in accordance with the footnotes

¹⁾ Service life with collector downtime: 200 h/a at 180 °C, 60 h/a at 200 °C, total of 500 h/service life at 220 °C

²⁾ 16 bar / 1600 kPa for d22–76.1, 10 bar / 1000 kPa for d88.9–108

³⁾ After Geberit approval

⁴⁾ Only use approved inhibitors

⁵⁾ Only use approved antifreeze agents

⁶⁾ Only use fittings with union nuts made of CrNi steel

Application overview: Geberit Mapress Stainless Steel for gaseous media

Geberit Great Britain, version: November 2016

Application purposes	Operating temperature	Maximum operating pressure	Pipes		
			CrNiMo steel 1.4401 / 316	CrMoTi steel 1.4521 / 444	CrNi steel 1.4301 / 304
For compressed air (oil purity class 0–3)	0–100 °C	25 / 16 / 12 bar 2500 / 1600 / 1200 kPa	✓ ¹⁾	✓ ³⁾	✓ ⁴⁾
For compressed air (oil purity class 0–X)	0–100 °C	25 / 16 / 12 bar 2500 / 1600 / 1200 kPa	✓ ¹⁾	✓ ³⁾	✓ ⁴⁾
For negative pressure	0–40 °C	Abs. ≥ 0,2 bar / 20 kPa	✓	✓	✓
For inert gases (e.g. nitrogen)	0–100 °C	25 / 16 / 12 bar 2500 / 1600 / 1200 kPa	✓ ¹⁾	✓ ³⁾	✓ ⁴⁾
For industrial gases (e.g. acetylene, shielding gases)	Upon request	Upon request	✓		
For natural gases	-20 – +70 °C	5 / 5 bar 500 / 100 kPa	✓		
For liquefied gases	-20 – +70 °C	5 / 5 bar 500 / 100 kPa	✓		
For biogases	-20 – +70 °C	5 / 5 bar 500 / 100 kPa	✓ ²⁾		

✓ Application generally approved if the defined additional requirements are met in accordance with the footnotes

¹⁾ 25 bar / 2500 kPa for d12–54, 16 bar / 1600 kPa for d76.1, 12 bar / 1200 kPa for d88.9–108

²⁾ After Geberit approval

³⁾ 16 bar / 1600 kPa for d15–54

⁴⁾ 16 bar / 1600 kPa for d15–76.1, 10 bar / 1000 kPa for d88.9–108

⁵⁾ Oil purity class in accordance with ISO 8573-1:2010E; for details on moisture and particles, see technical information "Geberit Piping Systems for Compressed Air Installations"


	Seal rings			Flat gaskets for screw connections				Flange gaskets	
	CIIR, black	FKM, blue	FKM, white	FPM, red	EPDM, black	FPM, green	Centellen® R WS 3825	Centellen® HD WS 3822	Centellen® HD WS 3822
	✓				✓				✓
	✓ ⁴⁾				✓ ⁴⁾				✓
	✓				✓				✓
	✓ ⁵⁾						✓ ⁶⁾		✓
	✓ ⁴⁾					✓	✓ ⁶⁾		✓
		✓ ⁴⁾					✓ ⁶⁾		✓
	✓ ⁴⁾						✓ ⁶⁾		✓
			✓ ⁴⁾					✓ ⁶⁾	✓
	✓ ³⁾				✓ ³⁾				✓ ³⁾
	✓				✓				✓
	✓				✓				✓
	✓				✓				✓
	✓				✓				✓
				✓		✓			✓
	✓				✓				✓
				✓		✓			✓
		✓				✓			✓
		✓				✓			✓
		✓ ³⁾				✓ ³⁾			✓ ³⁾
	✓ ³⁾	✓ ³⁾			✓ ³⁾	✓ ³⁾	✓ ^{3) 6)}	✓ ^{3) 6)}	✓ ³⁾

	Fittings		Seal rings			Flat gaskets for screw connections			Flange gaskets	
	CrNiMo steel 1.4401 / 316	Gunmetal	CIIR, black	FKM, blue	HNBR, yellow	EPDM, black	FPM, green	Centellen® HD WS 3822	Centellen® HD WS 3822	
	✓	✓	✓ ⁵⁾			✓ ⁵⁾			✓	
	✓	✓		✓ ⁵⁾			✓ ⁵⁾		✓	
	✓	✓	✓						✓	
	✓	✓	✓			✓			✓	
	✓		✓ ²⁾	✓ ²⁾					✓ ²⁾	
	✓				✓			✓	✓	
	✓				✓			✓	✓	
	✓ ²⁾				✓ ²⁾			✓ ²⁾	✓ ²⁾	

1.2 Geberit Mapress Stainless Steel

1.2.1 System pipes 1.4401

Geberit Mapress Stainless Steel system pipe, CrNiMo, small bundle

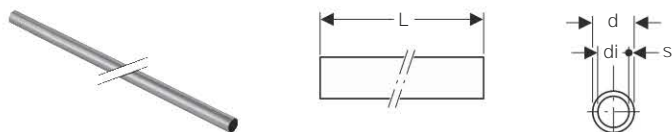

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Silicone-free (LABS-free)
- Pipe end with blue protection plug


Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
Surface roughness	1.5 µm
Thermal expansion	0.0165 mm/(m · K)
Thermal conductivity, pipe	15 W/(m · K)

Art. no.	DN	d, Ø [mm]	di, Ø [mm]	s [mm]	L [m]	SU3 [m]	SU2 [m]	GBP/m
39202	12	15	13	1	6	120		7.31
39203	15	18	16	1	6	90		8.63
39204	20	22	19.6	1.2	6	60		11.67
39205	25	28	25.6	1.2	6	60		14.39
39206	32	35	32	1.5	6	30		21.19
39207	40	42	39	1.5	6	30		26.08
39208	50	54	51	1.5	6	30		33.17
39209	65	76.1	72.1	2	6		6	67.25
39210	80	88.9	84.9	2	6		6	76.61
39211	100	108	104	2	6		6	92.29

1.2.2 System pipes 1.4301

Geberit Mapress Stainless Steel system pipe, CrNi, small bundle



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10


Technical data

Material	CrNi steel 1.4301 (EN 10088)
Surface roughness	1.5 µm
Thermal expansion	0.016 mm/(m · K)
Thermal conductivity, pipe	15 W/(m · K)

Art. no.	DN	d, Ø [mm]	di, Ø [mm]	s [mm]	L [m]	SU3 [m]	SU2 [m]	GBP/m
39602	12	15	13	1	6	120		6.19
39603	15	18	16	1	6	90		7.34
39604	20	22	19.6	1.2	6	60		9.88
39605	25	28	25.6	1.2	6	60		12.18
39606	32	35	32	1.5	6	30		18.17
39607	40	42	39	1.5	6	30		22.27
39608	50	54	51	1.5	6	30		28.13
39109	65	76.1	73.1	1.5	6		6	37.34
39110	80	88.9	85.9	1.5	6		6	42.75
39111	100	108	104	2	6		6	51.41

1.2.3 Pipe nipples

Geberit Mapress Stainless Steel pipe nipple

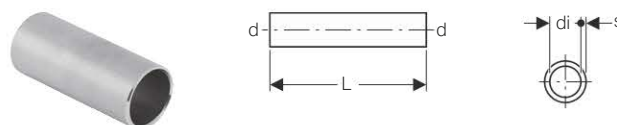

Application purposes

- For shortest construction length between two pressing sockets
- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, Ø [mm]	di, Ø [mm]	s [mm]	L [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
32050	12	15	13	1	5		1	2.65
32051	15	18	16	1	5	5	1	2.87
32052	20	22	19.6	1.2	5.2	5	1	3.07
32053	25	28	25.6	1.2	5.6	5	1	3.91
32054	32	35	32	1.5	6.2		1	5.02
32055	40	42	39	1.5	8		1	7.11
32056	50	54	51	1.5	9		1	9.23
32057	65	76.1	72.1	2	13.6		1	38.02
32058	80	88.9	84.9	2	15		1	44.33
32059	100	108	104	2	18		1	62.04

1.2.4 Couplings

Geberit Mapress Stainless Steel coupling



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)						
Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
33001	10	12	4.2	0.8	100	10		6.32
32002	12	15	4.8	0.8	200	20		5.15
32003	15	18	4.8	0.8	200	20		5.55
32004	20	22	5	0.8	200	20		6.49
32005	25	28	5.4	0.8	100	20		7.36
32006	32	35	6.2	1	100	5		9.09
32007	40	42	7.1	1.1	48	4		12.43
32008	50	54	8.3	1.3	48	4		14.91
32009	65	76.1	14.1	3.5	20		1	73.84
32010	80	88.9	16.2	4.2	10		1	84.37
32011	100	108	19.4	4.4	10		1	107.20

Geberit Mapress Stainless Steel slip coupling



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)								
Art. no.	DN	d, ø [mm]	E [cm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.	
32102	12	15	2.5	8	3	50	10		8.61	
32103	15	18	2.5	8	3	50	10		8.94	
32104	20	22	2.5	8.4	3.4	50	10		10.19	
32105	25	28	3	9.1	3.1	50	10		11.81	
32106	32	35	3	10.2	4.2	50	5		13.19	
32107	40	42	4	12	4	48	4		15.35	
32108	50	54	4	14	6	40	4		19.60	
32109	65	76.1	6	23	11	5		1	109.01	
32110	80	88.9	7	26	12	5		1	123.09	
32111	100	108	8	31	15	5		1	147.65	

1.2.5 Reducers

Geberit Mapress Stainless Steel reducer with plain end



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)								
Art. no.	DN	d, ø [mm]	d1, ø [mm]	H [cm]	L [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
33002	12 / 10	15	12	3.4	5.1	25	5		6.92
33003	15 / 10	18	12	3.6	5.3		5	1	7.08
32303	15 / 12	18	15	3.5	5.5	200	20		5.75
33004	20 / 10	22	12	4.3	6			1	7.38
32305	20 / 12	22	15	3.9	5.9	100	20		6.29
32306	20 / 15	22	18	3.7	5.7	200	20		6.29
32307	25 / 12	28	15	4.6	6.6	50	10		7.18
32308	25 / 15	28	18	4.4	6.4	50	10		7.18
32309	25 / 20	28	22	3.9	6	200	20		7.18
32310	32 / 12	35	15	5.5	7.5	25	5		12.14
32311	32 / 15	35	18	5.4	7.4	25	5		12.14
32312	32 / 20	35	22	5	7.1	50	5		12.14
32313	32 / 25	35	28	4.5	6.8	100	5		12.14
32314	40 / 12	42	15	6.1	8.1		5	1	22.11
32315	40 / 15	42	18	6	8		5	1	22.11
32316	40 / 20	42	22	6.1	8.2	24	4		22.11
32317	40 / 25	42	28	6	8.3	48	4		22.11
32318	40 / 32	42	35	5.1	7.7	48	4		22.11
32319	50 / 12	54	15	7.7	9.7	5		1	30.93
32320	50 / 15	54	18	7.6	9.6		5	1	30.93
32321	50 / 20	54	22	7.4	9.5	24	4		30.93
32322	50 / 25	54	28	8.7	11	48	4		30.93
32323	50 / 32	54	35	8	10.6	48	4		30.93
32324	50 / 40	54	42	6.2	9.2	48	4		30.93
32331	65 / 50	76.1	54	11.1	14.6	25		1	66.32
32338	80 / 50	88.9	54	12.8	16.3	20		1	70.76
32339	80 / 65	88.9	76.1	10.8	16.1	20		1	70.76
32345	100 / 50	108	54	13.7	17.2	5		1	77.37
32346	100 / 65	108	76.1	13.1	18.4	5		1	77.37
32348	100 / 80	108	88.9	14.3	20.3	5		1	77.37

1.2.6 Bends

Geberit Mapress Stainless Steel bend

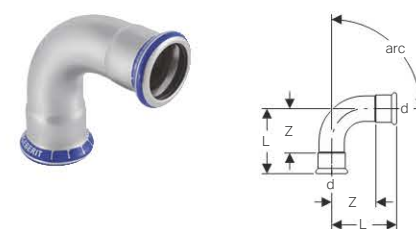

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data


Material	CrNiMo steel 1.4401 (EN 10088)							
Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
arc / angle: 15°								
36101	12	15	3	1			1	7.72
36103	20	22	3.3	1.2		5	1	10.49
36104	25	28	3.6	1.3		5	1	13.25
36105	32	35	3.2	0.6		5	1	20.45
36106	40	42	3.7	0.7		5	1	32.05
36107	50	54	4.4	0.9		5	1	44.22
36108	65	76.1	7.5	2.2	5		1	110.56
36109	80	88.9	8.5	2.5			1	138.86
36110	100	108	10.3	2.8			1	189.86
arc / angle: 30°								
36121	12	15	3.3	1.3			1	7.72
36123	20	22	3.7	1.6	25	5		10.49
36124	25	28	4.1	1.8	25	5		13.25
36125	32	35	3.7	1.1	25		1	20.45
36126	40	42	4.4	1.4	25		1	32.05
36127	50	54	5.2	1.7	25		1	44.22
36128	65	76.1	8.8	3.5	5		1	110.56
36129	80	88.9	10.1	4.1	5		1	138.86
36130	100	108	12.2	4.7	5		1	189.86
arc / angle: 45°								
30602	12	15	3.6	1.6	200	20		7.72
30603	15	18	3.7	1.7	200	20		8.62
30604	20	22	4.2	2.1	100	20		10.49
30605	25	28	4.8	2.5	100	10		13.25
32606	32	35	4.3	1.7	100	5		20.45
32607	40	42	5.1	2.1	48	4		32.05
32608	50	54	6.2	2.7	50	2		44.22
32609	65	76.1	10.3	5	10		1	110.56
32610	80	88.9	11.7	5.7	5		1	138.86
32611	100	108	14.5	7	5		1	189.86

Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
arc / angle: 60°								
36161	12	15	4	2			1	7.72
36163	20	22	4.7	2.6		5	1	10.49
36164	25	28	5.4	3.1			1	13.25
36165	32	35	5	2.4			1	20.45
36166	40	42	5.9	2.9			1	32.05
36167	50	54	7.2	3.7		5	1	44.22
36168	65	76.1	11.7	6.4			1	110.56
36169	80	88.9	13.6	7.6			1	138.86
36170	100	108	16.6	9.1			1	189.86
arc / angle: 90°								
30102	12	15	4.9	2.9	200	20		7.72
30103	15	18	5.3	3.3	100	20		8.62
30104	20	22	6.1	4	100	20		10.49
30105	25	28	7.2	4.9	100	10		13.25
31106	32	35	6.8	4.2	50	5		20.45
31107	40	42	8	5	50	2		32.05
31108	50	54	10	6.5	30	2		44.22
31109	65	76.1	15.9	10.6	10		1	110.56
31110	80	88.9	18.5	12.5	10		1	138.86
31111	100	108	23	15.5	5		1	189.86



- Bend 45° / 90° in the dimensions d76.1 / 88.9 / 108 with new masses as of 01.04.2017

Geberit Mapress Stainless Steel bend with plain end



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data


Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	H [cm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
arc / angle: 15°									
36111	12	15	4	3	1			1	7.72
36113	20	22	4.1	3.3	1.2		5	1	10.49
36114	25	28	4.3	3.6	1.3		5	1	13.25
36115	32	35	4.1	3.2	0.6			1	20.45
36116	40	42	4.7	3.7	0.7			1	32.05
36117	50	54	5.5	4.4	0.9			1	44.22
36118	65	76.1	8.4	7.5	2.2			1	110.56
36119	80	88.9	9.5	8.5	2.5			1	138.86
36120	100	108	11.7	10.3	2.8			1	189.86
arc / angle: 30°									
36131	12	15	4.3	3.3	1.3		5	1	7.72
36133	20	22	4.6	3.7	1.6		5	1	10.49
36134	25	28	4.8	4.1	1.8		5	1	13.25
36135	32	35	4.6	3.7	1.1		5	1	20.45
36136	40	42	5.4	4.4	1.4		5	1	32.05
36137	50	54	6.3	5.2	1.7		5	1	44.22
36138	65	76.1	9.7	8.8	3.5			1	110.56
36139	80	88.9	11.1	10.1	4.1			1	138.86
36140	100	108	13.6	12.2	4.7			1	189.86
arc / angle: 45°									
30702	12	15	4.5	3.6	1.6	200	20		7.72
30703	15	18	4.2	3.7	1.7	200	20		8.62
30704	20	22	5.2	4.2	2.1	100	20		10.49
30705	25	28	5.6	4.8	2.5	100	10		13.25
32706	32	35	5.3	4.3	1.7	100	5		20.45
32707	40	42	6.1	5.1	2.1	48	4		32.05
32708	50	54	7.3	6.2	2.7	24	2		44.22
32709	65	76.1	11.1	10.3	5	5		1	110.56
32710	80	88.9	12.8	11.7	5.7	5		1	138.86
32711	100	108	15.8	14.5	7	5		1	189.86
arc / angle: 60°									
36171	12	15	5	4	2			1	7.72
36173	20	22	5.6	4.7	2.6			1	10.49
36174	25	28	6.1	5.4	3.1			1	13.25
36175	32	35	5.9	5	2.4			1	20.45
36176	40	42	6.9	5.9	2.9			1	32.05
36177	50	54	8.3	7.2	3.7			1	44.22
36178	65	76.1	12.6	11.7	6.4			1	110.56
36179	80	88.9	14.6	13.6	7.6			1	138.86
36180	100	108	18	16.6	9.1			1	189.86
arc / angle: 90°									
30302	12	15	5.9	4.9	2.9	200	20		7.72
30303	15	18	6.1	5.3	3.3	200	20		8.62
30304	20	22	7	6.1	4	100	20		10.49
30305	25	28	7.9	7.2	4.9	100	10		13.25
33306	32	35	7.7	6.8	4.2	50	5		20.45
33307	40	42	9	8	5	50	2		32.05
33308	50	54	11.1	10	6.5	30	2		44.22
33309	65	76.1	16.7	15.9	10.6	5		1	110.56
33310	80	88.9	19.5	18.5	12.5	5		1	138.86
33311	100	108	24.1	23	15.5	5		1	189.86



- Bend 45° / 90° in the dimensions d76.1 / 88.9 / 108 with new masses as of 01.04.2017

Geberit Mapress Stainless Steel bend with plain ends



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d,ø [mm]	H [cm]	H1 [cm]	K [cm]	K1 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
----------	----	-------------	-----------	------------	-----------	------------	--------------	--------------	--------------	---------

arc / angle: 15°

30892	12	15	6	12.2	2.1	8.3			1	9.17
30893	15	18	5.5	12.8	1.5	8.8			1	9.37
30894	20	22	5	12.4	0.7	8.1			1	9.92
30905	25	28	4.5	13.4	0	8.9		5	1	10.28
30906	32	35	7.3	22.2	2	16.9			1	21.55
30907	40	42	8.9	28	3	22.1			1	26.52
30908	50	54	12.2	33.7	4.5	26			1	33.16
30009	65	76.1	8.4	20.4	0	12			1	103.91
30010	80	88.9	9.5	22	0	12.5			1	117.18
30011	100	108	11.7	25.4	0	13.7			1	140.41

arc / angle: 30°

30932	12	15	6	12.2	2.1	8.3			1	9.17
30933	15	18	5.5	12.8	1.6	8.9			1	9.37
30934	20	22	5	12.4	0.6	8			1	9.92
30935	25	28	5.1	13	0	7.9		5	1	10.28
30936	32	35	8	21.4	2	15.4			1	21.55
30937	40	42	9.9	27.2	3	20.3			1	26.52
30938	50	54	13.4	32.6	5.5	24.7			1	33.16
30029	65	76.1	9.7	21.7	0	12			1	103.91
30030	80	88.9	11.1	23.6	0	12.5			1	117.18
30031	100	108	13.6	27.3	0	13.7			1	140.41

arc / angle: 45°

30872	12	15	6.2	12	1.9	7.7		5	1	9.17
30873	15	18	5.8	12.4	1.6	8.2			1	9.37
30874	20	22	5.6	12	0.7	7.1			1	9.92
30875	25	28	5.8	12.2	0.2	6.6			1	10.28
30876	32	35	9.4	20.6	2	13.2			1	21.55
30877	40	42	11.4	26.2	0.1	14.9			1	26.52
30878	50	54	14.6	32.1	3.7	21.2			1	33.16
30049	65	76.1	11.1	23	0	11.9			1	103.91
30050	80	88.9	13	25.2	0	12.2			1	117.18
30051	100	108	15.7	29.4	0	13.7			1	140.41

arc / angle: 60°


30942	12	15	6	12.2	2.1	8.3			1	9.17
30943	15	18	6.2	12.2	1.6	7.6			1	9.37
30944	20	22	6	11.8	0.5	6.3			1	9.92
30955	25	28	6.3	12.1	0	5.8			1	10.28
30956	32	35	9.7	20.3	2	12.6			1	21.55
30957	40	42	12	25.6	3	16.6			1	26.52
30958	50	54	16.2	30.6	5.5	19.9			1	33.16
30069	65	76.1	12.6	24.6	0	12			1	103.91
30070	80	88.9	14.6	27.1	0	12.5			1	117.18
30071	100	108	18	31.7	0	13.7			1	140.41

Art. no.	DN	d,ø [mm]	H [cm]	H1 [cm]	K [cm]	K1 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
----------	----	-------------	-----------	------------	-----------	------------	--------------	--------------	--------------	---------

arc / angle: 90°

30402	12	15	7	12	2.2	7.2	50	10		9.17
30403	15	18	7	12	1.7	6.7	50	10		9.37
30404	20	22	7	12	0	5	50	10		9.92
30405	25	28	8	12	0	4	50	10		10.28
30406	32	35	12	20	2	10		5	1	21.55
30407	40	42	15	25	3	13		5	1	26.52
30408	50	54	20	30	5.5	15.5		5	1	33.16
30089	65	76.1	16.6	28.6	0	12			1	103.91
30090	80	88.9	19.4	31.9	0	12.5			1	117.18
30091	100	108	24	37.7	0	13.7			1	140.41

Geberit Mapress Stainless Steel bend with plain ends, long



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10


Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d,ø [mm]	H [cm]	H1 [cm]	SU1 [pc.]	GBP/pc.
----------	----	-------------	-----------	------------	--------------	---------

30414	20	22	7	84	1	28.00
30415	25	28	8	85	1	30.00

Geberit Mapress Stainless Steel pipe bridge



Application purposes

- For crossing parallel pipes with distance L
- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Technical data


Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d,ø [mm]	L [cm]	L1 [cm]	L2 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
----------	----	-------------	-----------	------------	------------	--------------	--------------	--------------	---------

30802	12	15	5.7	15.8	3	25	5		7.91
30803	15	18	6	16.6	3.1	25	5		8.18
30804	20	22	6.5	17.9	3.3	25	5		9.29
30805	25	28	7.3	20.6	3.6			1	11.25

1.2.7 T-pieces

Geberit Mapress Stainless Steel T-piece, equal



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, \varnothing [mm]	L [cm]	L1 [cm]	I [cm]	Z [cm]	Z1 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
33008	10	12	5.6	3.5	2.8	1.1	1.8	50	10		11.40
31002	12	15	6.4	3.9	3.2	1.2	1.9	200	20		12.00
31003	15	18	6.8	4.1	3.4	1.4	2.1	100	20		13.67
31004	20	22	7.4	4.4	3.7	1.6	2.3	100	20		14.69
31005	25	28	8.4	5	4.2	1.9	2.7	50	10		17.26
31006	32	35	10	5.7	5	2.4	3.1	50	5		21.81
31007	40	42	11.4	6.5	5.7	2.7	3.5	48	4		30.96
31008	50	54	13.8	7.7	6.9	3.4	4.2	30	2		37.00
31009	65	76.1	23	11	11.5	6.2	5.7	5		1	203.82
31010	80	88.9	26	12.8	13	7	6.8	5		1	223.02
31011	100	108	31	15.3	15.5	8	7.8	5		1	275.25

Geberit Mapress Stainless Steel T-piece, reduced



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)														
Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	L [cm]	L1 [cm]	l [cm]	l2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.	
33005	12 / 10 / 12	15	12	15	6.4	3.6	3.2	3.2	1.2	1.9	1.2			5	1	12.12
33006	15 / 10 / 15	18	12	18	6.8	3.8	3.4	3.4	1.4	2.1	1.4				1	12.61
31208	15 / 12 / 12	18	15	15	7.9	4.1	3.4	4.5	1.4	2.1	2.5	25	5			11.80
31204	15 / 12 / 15	18	15	18	6.8	4.1	3.4	3.4	1.4	2.1	1.4	100	20			12.38
33007	20 / 10 / 20	22	12	22	7.4	4	3.7	3.7	1.6	2.3	1.6				1	13.33
31227	20 / 12 / 15	22	15	18	8.5	4.3	3.7	4.8	1.6	2.3	2.8			5	1	12.61
31206	20 / 12 / 20	22	15	22	7.4	4.3	3.7	3.7	1.6	2.3	1.6	100	20			13.25
31228	20 / 15 / 15	22	18	18	8.5	4.3	3.7	4.8	1.6	2.3	2.8			5	1	12.61
31207	20 / 15 / 20	22	18	22	7.4	4.3	3.7	3.7	1.6	2.3	1.6	100	20			13.25
31209	25 / 12 / 25	28	15	28	8.4	4.6	4.2	4.2	1.9	2.6	1.9	100	10			16.03
31210	25 / 15 / 25	28	18	28	8.4	4.6	4.2	4.2	1.9	2.6	1.9	100	10			16.03
31234	25 / 20 / 20	28	22	22	9	4.7	4.2	4.8	1.9	2.6	2.7	25	5			15.25
31211	25 / 20 / 25	28	22	28	8.4	4.7	4.2	4.2	1.9	2.6	1.9	100	10			16.03
31212	32 / 12 / 32	35	15	35	10	4.9	5	5	2.4	2.9	2.4	50	5			19.56
31213	32 / 15 / 32	35	18	35	10	4.9	5	5	2.4	2.9	2.4	50	5			19.91
31235	32 / 20 / 25	35	22	28	10.4	5	5	5.4	2.4	2.9	3.1			5	1	18.94
31214	32 / 20 / 32	35	22	35	10	5	5	5	2.4	2.9	2.4	50	5			19.91
31242	32 / 25 / 25	35	28	28	10.4	5.3	5	5.4	2.4	3	3.1			5	1	18.94
31215	32 / 25 / 32	35	28	35	10	5.3	5	5	2.4	3	2.4	50	5			19.91
31216	40 / 12 / 40	42	15	42	11.4	5.3	5.7	5.7	2.7	3.3	2.7			5	1	28.73
31217	40 / 15 / 40	42	18	42	11.4	5.3	5.7	5.7	2.7	3.3	2.7	48	4			28.73
31243	40 / 20 / 32	42	22	35	11.5	5.4	5.7	5.8	2.7	3.3	3.2				1	27.37
31218	40 / 20 / 40	42	22	42	11.4	5.4	5.7	5.7	2.7	3.3	2.7	48	4			28.73
31251	40 / 25 / 32	42	28	35	11.5	5.7	5.7	5.8	2.7	3.4	3.2				1	27.37
31219	40 / 25 / 40	42	28	42	11.4	5.7	5.7	5.7	2.7	3.4	2.7	48	4			28.73
31220	40 / 32 / 40	42	35	42	11.4	6.1	5.7	5.7	2.7	3.5	2.7	48	4			28.73
31221	50 / 12 / 50	54	15	54	13.8	5.9	6.9	6.9	3.4	3.9	3.4			5	1	33.16
31222	50 / 15 / 50	54	18	54	13.8	5.9	6.9	6.9	3.4	3.9	3.4	20	2			33.16
31223	50 / 20 / 50	54	22	54	13.8	6	6.9	6.9	3.4	3.9	3.4	30	2			33.16
31224	50 / 25 / 50	54	28	54	13.8	6.3	6.9	6.9	3.4	4	3.4	30	2			33.16
31225	50 / 32 / 50	54	35	54	13.8	6.7	6.9	6.9	3.4	4.1	3.4	30	2			33.16
31226	50 / 40 / 50	54	42	54	13.8	7.1	6.9	6.9	3.4	4.1	3.4	20	2			33.16
31229	65 / 20 / 65	76.1	22	76.1	23	7.7	11.5	11.5	6.2	5.6	6.2	5			1	172.47
31230	65 / 25 / 65	76.1	28	76.1	23	7.9	11.5	11.5	6.2	5.6	6.2	5			1	172.47
31231	65 / 32 / 65	76.1	35	76.1	23	8.1	11.5	11.5	6.2	5.5	6.2	5			1	172.47

Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	L [cm]	L1 [cm]	I [cm]	I2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
31232	65 / 40 / 65	76.1	42	76.1	23	8.1	11.5	11.5	6.2	5.1	6.2	5		1	172.47
31233	65 / 50 / 65	76.1	54	76.1	23	8.7	11.5	11.5	6.2	5.2	6.2	5		1	172.47
31236	80 / 20 / 80	88.9	22	88.9	26	8.5	13	13	7	6.4	7	5		1	187.95
31237	80 / 25 / 80	88.9	28	88.9	26	8.7	13	13	7	6.4	7	5		1	187.95
31238	80 / 32 / 80	88.9	35	88.9	26	9	13	13	7	6.4	7	5		1	187.95
31239	80 / 40 / 80	88.9	42	88.9	26	9.2	13	13	7	6.2	7	5		1	187.95
31240	80 / 50 / 80	88.9	54	88.9	26	9.3	13	13	7	5.8	7	10		1	187.95
31241	80 / 65 / 80	88.9	76.1	88.9	26	11.4	13	13	7	6.1	7			1	187.95
31244	100 / 20 / 100	108	22	108	31	10.3	15.5	15.5	8	8.2	8			1	221.13
31245	100 / 25 / 100	108	28	108	31	10.5	15.5	15.5	8	8.2	8			1	221.13
31246	100 / 32 / 100	108	35	108	31	10.8	15.5	15.5	8	8.2	8	5		1	221.13
31247	100 / 40 / 100	108	42	108	31	11	15.5	15.5	8	8	8			1	221.13
31248	100 / 50 / 100	108	54	108	31	11.3	15.5	15.5	8	7.8	8	5		1	221.13
31249	100 / 65 / 100	108	76.1	108	31	12.4	15.5	15.5	8	7.1	8	5		1	221.13
31250	100 / 80 / 100	108	88.9	108	31	13.5	15.5	15.5	8	7.5	8			1	221.13

Geberit Mapress Stainless Steel T-piece with male thread



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10


Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)													
Art. no.	DN	d, ø [mm]	R [°]	d1, ø [mm]	H [cm]	L [cm]	I [cm]	I1 [cm]	Z [cm]	Z1 [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.		
31454	12	15	1/2	15	3.4	6.4	3.2	3.2	1.2	1.2	5	1	13.25		
31455	15	18	1/2	18	3.6	6.8	3.4	3.4	1.4	1.4	5	1	13.25		
31458	20	22	3/4	22	4.2	7.4	3.7	3.7	1.6	1.6	5	1	15.47		
31461	25	28	1	28	4.8	8.4	4.2	4.2	1.9	1.9	5	1	17.68		
31464	32	35	1 1/4	35	5.4	10	5	5	2.4	2.4			1	21.01	

Geberit Mapress Stainless Steel T-piece with female thread



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)													
Art. no.	DN	d, ø [mm]	Rp ["]	d1, ø [mm]	L [cm]	L1 [cm]	I [cm]	I2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
31304	12 / 15 / 12	15	1/2	15	6.4	4	3.2	3.2	1.2	2.7	1.2	100	10		13.25
31305	15	18	1/2	18	6.8	4.2	3.4	3.4	1.4	2.9	1.4	100	10		13.25
31306	15 / 20 / 15	18	3/4	18	6.8	4.4	3.4	3.4	1.4	2.9	1.4		5	1	13.25
31307	20 / 15 / 20	22	1/2	22	7.4	4.3	3.7	3.7	1.6	3	1.6	100	20		15.47
31308	20	22	3/4	22	7.4	4.6	3.7	3.7	1.6	3.1	1.6	50	10		15.47
31309	25 / 15 / 25	28	1/2	28	8.4	4.6	4.2	4.2	1.9	3.3	1.9	50	10		17.68
31310	25 / 20 / 25	28	3/4	28	8.4	4.9	4.2	4.2	1.9	3.4	1.9	50	10		17.68
31311	25	28	1	28	8.4	5.3	4.2	4.2	1.9	3.6	1.9		5	1	17.68
31312	32 / 15 / 32	35	1/2	35	10	5	5	5	2.4	3.7	2.4	50	5		21.01
31313	32 / 20 / 32	35	3/4	35	10	5.3	5	5	2.4	3.8	2.4	50	5		21.01
31316	40 / 15 / 40	42	1/2	42	11.4	5.3	5.7	5.7	2.7	4	2.7	48	4		23.77
31317	40 / 20 / 40	42	3/4	42	11.4	5.6	5.7	5.7	2.7	4.1	2.7	24	4		23.77
31320	50 / 15 / 50	54	1/2	54	13.8	5.9	6.9	6.9	3.4	4.6	3.4	30	2		29.84
31321	50 / 20 / 50	54	3/4	54	13.8	6.2	6.9	6.9	3.4	4.7	3.4	20	2		29.84
31324	50	54	2	54	13.8	7.9	6.9	6.9	3.4	5.6	3.4	20		1	29.84
31326	65 / 20 / 65	76.1	3/4	76.1	23	7.9	11.5	11.5	6.2	6.4	6.2	5		1	176.87
31329	65 / 50 / 65	76.1	2	76.1	23	8.9	11.5	11.5	6.2	6.6	6.2	5		1	176.87
31331	80 / 20 / 80	88.9	3/4	88.9	26	8.8	13	13	7	7.3	7	5		1	187.95
31334	80 / 50 / 80	88.9	2	88.9	26	9.6	13	13	7	7.3	7	5		1	187.95
31336	100 / 20 / 100	108	3/4	108	31	10.5	15.5	15.5	8	9	8	5		1	221.13
31339	100 / 50 / 100	108	2	108	31	11.5	15.5	15.5	8	9.2	8			1	221.13

1.2.8 Adaptors, permanent

Geberit Mepla adaptor to Geberit Mapress, with plain end



Application purposes

- Suitable exclusively for pressing in Geberit Mapress pressing sockets
- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10

Characteristics


- Leaky if unpressed
- O-ring made of EPDM
- Pressing nipple with transparent protective cap

Technical data

Material	Gunmetal (CuSn5Zn5Pb2-C)
----------	--------------------------

Art. no.	DN	d, ø [mm]	d1, ø [mm]	L [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
601.508.00.5	12	16	15	5.9	1.2		50	10		7.78
602.507.00.5	15	20	15	6.1	1.1		50	10	1	7.78
602.508.00.5	15	20	18	6.1	1.2		50	10		7.78
602.509.00.5	15	20	22	6.2	1.2		50	10	1	7.78
603.508.00.5	20	26	22	6.7	1.2		25	5		12.12
604.508.00.5	25	32	28	6.6	1.3		25	5		13.73
605.508.00.5	32	40	35	7.5	1.3		25	5		17.15
606.508.00.5	40	50	42	10.1	3.1	480	10	2		33.89
607.508.00.5	50	63	54	13.6	3.2	180	10		1	52.19

Geberit Mapress Stainless Steel adaptor with male thread



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	R ["]	H [cm]	L [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
33009	10 / 15	12	1/2	1.9	3.6	25	5		10.66
31726	12	15	3/8	1.8	3.8	50	5		9.92
31703	12 / 15	15	1/2	2.1	4.1	200	20		9.92
31714	12 / 20	15	3/4	2.3	4.3	50	10		9.92
31704	15	18	1/2	2.2	4.2	200	20		11.03
31705	15 / 20	18	3/4	2.4	4.4	100	20		11.03
31715	20 / 15	22	1/2	2.1	4.2	100	20		12.14
31707	20	22	3/4	2.3	4.4	100	20		12.14
31716	20 / 25	22	1	2.5	4.6	100	10		12.14
31717	25 / 20	28	3/4	2.3	4.6	100	20		15.47
31708	25	28	1	2.3	4.8	100	20		15.47
31718	25 / 32	28	1 1/4	2.5	4.8	50	10		15.47
31719	32 / 25	35	1	2.5	5.1	50	5		22.11
31709	32	35	1 1/4	2.7	5.3	50	5		22.11
31720	32 / 40	35	1 1/2	2.7	5.3	25	5		22.11
31721	40 / 32	42	1 1/4	2.7	5.7	48	4		32.71
31710	40	42	1 1/2	2.7	5.7	48	4		32.71
31722	50 / 40	54	1 1/2	4.8	8.3	25		1	44.22
31711	50	54	2	5.4	8.9	25		1	44.22
31713	65	76.1	2 1/2	7	12.3	5		1	201.01
31724	80	88.9	3	7.7	13.7	5		1	301.61

Geberit Mapress Stainless Steel adaptor with male thread G



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)					
Art. no.	DN	d, ø [mm]	G ["]	H [cm]	L [cm]	SU1 [pc.]	GBP/pc.
31731	12	15	3/4	1.5	3.5	1	19.59
31732	15	18	3/4	1.7	3.8	1	22.58
31733	20	22	1	1.9	4	1	30.03
31734	25	28	1 1/4	1.8	4.1	1	53.89
31735	32	35	1 1/2	2.1	4.7	1	55.59
31736	40	42	1 3/4	2.2	5.2	1	81.34
31737	50	54	2 3/8	2.8	6.3	1	144.82

Geberit Mapress Stainless Steel adaptor with male thread and plain end



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)						
Art. no.	DN	d, ø [mm]	R ["]	H [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
31932	12	15	1/2	5.7	25	5		9.92
31933	15	18	1/2	5.7	25	5		11.03
31936	20	22	3/4	5.9	25	5		12.14
31937	25	28	1	6.6	25	5		15.47
31938	32	35	1 1/4	8		5	1	22.11
31939	40	42	1 1/2	9.1		5	1	32.71
31940	50	54	2	10.2		5	1	44.22

Geberit Mapress Stainless Steel adaptor with female thread



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10


Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)							
Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
33010	10 / 15	12	1/2	3.4	0.4		5	1	11.55
31801	12	15	3/8	3.5	0.5			1	9.92
31802	12 / 15	15	1/2	3.7	0.4	200	20		9.92
31823	12 / 20	15	3/4	3.8	0.3	50	5		9.92
31803	15	18	1/2	3.7	0.4	100	20		11.03
31804	15 / 20	18	3/4	3.8	0.3	50	10		11.03
31805	20 / 15	22	1/2	3.6	0.2	100	20		12.14
31806	20	22	3/4	3.9	0.3	100	20		12.14
31824	20 / 25	22	1	4.2	0.4	50	10		12.14
31807	25 / 15	28	1/2	3.8	0.2	50	5		15.47
31819	25 / 20	28	3/4	3.9	0.3	50	10		15.47
31809	25	28	1	4.4	0.4	50	10		15.47
31825	25 / 32	28	1 1/4	4.6	0.4	25	5		15.47
31820	32 / 25	35	1	4.5	0.2	50	5		22.11
31811	32	35	1 1/4	4.9	0.4	50	5		22.11
31826	32 / 40	35	1 1/2	4.9	0.4	25	5		22.11
31821	40 / 32	42	1 1/4	5.1	0.2	48	4		32.71
31814	40	42	1 1/2	5.3	0.4	48	4		32.71
31822	50 / 40	54	1 1/2	7.1	2.2	25		1	44.22
31818	50	54	2	6.2	0.4	25		1	44.22

Geberit Mapress Stainless Steel adaptor with female thread and plain end, long

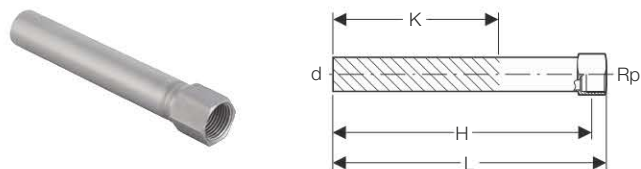

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)							
Art. no.	DN	d, ø [mm]	Rp ["]	H [cm]	L [cm]	K [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
90932	12	15	1/2	13.5	14.8	9	5	1	9.92
90933	15	18	1/2	13.5	14.8	9	5	1	11.03
90934	15	18	3/4	13.3	15.2	9		1	11.03
90935	20	22	1/2	13.9	14.8	8.9	5	1	12.14
90936	20	22	3/4	13.7	15.2	8.7	5	1	12.14

Geberit Mapress Stainless Steel adaptor with female thread and plain end




Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)						
Art. no.	DN	d, ø [mm]	Rp ["]	H [cm]	L [cm]		SU1 [pc.]	GBP/pc.
33846	20 / 15	22	1/2	4.5	5.8		1	14.06
33848	25 / 15	28	1/2	5.3	6.6		1	18.32
33850	32 / 15	35	1/2	5.6	6.9		1	24.27
33852	40 / 15	42	1/2	6.1	7.4		1	31.10
33854	50 / 15	54	1/2	6.6	7.9		1	37.06
33860	65 / 15	76.1	1/2	9.1	10.4		1	129.49
33862	80 / 15	88.9	1/2	10	11.3		1	184.01
33864	100 / 15	108	1/2	12.1	13.4		1	221.90

Geberit Mapress Stainless Steel elbow adaptor 90° with male thread

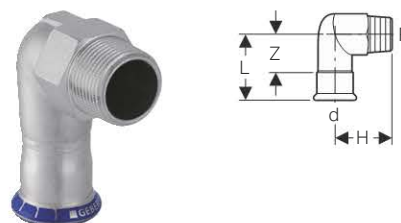

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10


Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)									
Art. no.	DN	d, ø [mm]	R ["]	H [cm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.	
33833	12 / 15	15	1/2	3.7	5.7	3.7	50	10		14.37	
33834	15	18	1/2	3.9	5.7	3.7	50	10		15.47	
33835	20	22	3/4	4.6	6	3.9	50	10		19.91	
33836	25	28	1	5.4	6.7	4.4	50	10		25.42	
33837	32	35	1 1/4	6.3	7.5	4.9		5	1	34.27	
33838	40	42	1 1/2	6.7	8.3	5.3		5	1	59.83	
33839	50	54	2	7.8	9.4	5.9		5	1	76.40	

Geberit Mapress Stainless Steel elbow adaptor 90° with female thread

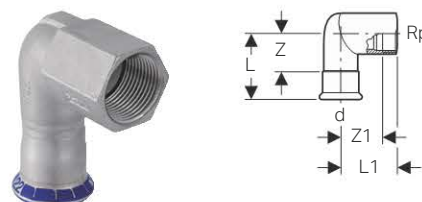

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10


Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)										
Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	L1 [cm]	Z [cm]	Z1 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.	
33802	12	15	3/8	5.7	3.4	3.7	2.4			1	13.62	
33803	12 / 15	15	1/2	5.7	3.7	3.7	2.4	100	20		13.81	
33804	15	18	1/2	5.7	3.9	3.7	2.6	50	10		17.28	
33805	20	22	3/4	6	4.6	3.9	3.1	50	10		19.91	
33806	25	28	1	6.7	5.4	4.3	3.7	40	10		25.42	
33807	32	35	1 1/4	7.5	6.3	4.9	4.4	25	5		34.27	

Geberit Mapress Stainless Steel elbow adaptor 90° with female thread and plain end



Application purposes


- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)								
Art. no.	DN	d, ø [mm]	Rp ["]	H [cm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
33203	12 / 15	15	1/2	5.3	3.6	2.3	25	5	13.81

1.2.9 Adaptors and connections, detachable

Geberit Mapress Stainless Steel union



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics


- Pressing indicator
- Leaky if unpressed
- Union nut made of brass
- Seal ring made of CIIR, black
- Flat gasket made of EPDM
- Pressing socket with transparent protection plug

Technical data

Media temperature with flat gasket EPDM	0–100 °C
Material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, ø [mm]	G ["]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
35320	12	15	3/4	6.6	2.6		5	1	33.99
35321	15	18	3/4	6.9	2.9		5	1	38.54
35322	20	22	1	7.2	3	10		1	47.76
35323	25	28	1 1/4	7.7	3.1	10		1	73.37
35324	32	35	1 1/2	8.2	3		5	1	76.93
35325	40	42	1 3/4	9.5	3.5		5	1	110.87
35326	50	54	2 3/8	11.3	4.3		5	1	184.12

Geberit Mapress Stainless Steel union, union nut made of CrNi steel



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Flat gasket made of EPDM
- Pressing socket with transparent protection plug

Technical data


Media temperature with flat gasket EPDM	0–100 °C
Material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, ø [mm]	G ["]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
35390	12	15	3/4	6.6	2.6	1	41.97
35391	15	18	3/4	6.9	2.9	1	47.81
35392	20	22	1	7.2	3	1	59.16
35393	25	28	1 1/4	7.7	3.1	1	90.61
35394	32	35	1 1/2	8.2	3	1	94.75
35395	40	42	1 3/4	9.5	3.5	1	136.42
35396	50	54	2 3/8	11.3	4.3	1	226.41

Geberit Mapress Stainless Steel

Geberit Mapress Stainless Steel
Adaptors and connections, detachable

Geberit Mapress Stainless Steel adaptor with union nut



Application purposes

- Suitable exclusively for threads with an inner diameter of $\leq di$
- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics


- Pressing indicator
- Leaky if unpressed
- Union nut made of brass
- Seal ring made of CIIR, black
- Flat gasket made of EPDM
- Pressing socket with transparent protection plug

Technical data

Media temperature with flat gasket EPDM	0–100 °C
Material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, \varnothing [mm]	G ["]	di, \varnothing [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
35042	12	15	1/2	10	5.1	2.5	50	5		15.47
35032	12	15	3/4	13	3.7	1.1	50	10		12.14
35033	15	18	3/4	13	3.7	1.1	50	10		12.69
35034	20	22	1	20	4	1.1	100	10		17.68
35044	20	22	1 1/4	26	4.3	1.3		5	1	17.68
35045	20	22	1 1/2	32	4.4	1.3		5	1	17.68
35046	25	28	1	20	5.5	2.4	50	5		23.20
35035	25	28	1 1/4	26	4.4	1.3	50	10		23.20
35047	25	28	1 1/2	32	4.6	1.3		5	1	23.20
35036	32	35	1 1/2	32	4.8	1.3	50	5		25.42
35037	40	42	1 3/4	39	5.2	1.3	48	4		33.86
35038	50	54	2 3/8	51	5.8	1.5	25		1	45.70
35039	65	76.1	3	73	9.9	3.3			1	187.95
35040	80	88.9	3 1/2	84	11.1	3.7			1	243.23

Geberit Mapress Stainless Steel adaptor with union nut made of CrNi steel



Application purposes

- Suitable exclusively for threads with an inner diameter of $\leq di$
- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Flat gasket made of EPDM
- Pressing socket with transparent protection plug

Technical data

Media temperature with flat gasket EPDM	0–100 °C
Material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, \varnothing [mm]	G ["]	di, \varnothing [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
35132	12	15	3/4	13	3.7	1.1	25	5		15.68
35134	20	22	1	20	4	1.1		5	1	19.58
35075	25	28	1 1/2	32	4.4	1.3		5	1	44.65

Geberit Mapress Stainless Steel adaptor union with male thread



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics


- Pressing indicator
- Leaky if unpressed
- Union nut made of brass
- Seal ring made of CIIR, black
- Flat gasket made of EPDM
- Pressing socket with transparent protection plug

Technical data

Media temperature with flat gasket EPDM	0–100 °C
Material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, Ø [mm]	R ["]	G ["]	H [cm]	L [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
35330	12 / 15	15	1/2	3/4	4.4	6.4	50	2		17.68
35331	12 / 20	15	3/4	3/4	4.6	6.6		5	1	17.68
35332	15	18	1/2	3/4	4.4	6.4	50	5		19.11
35333	15 / 20	18	3/4	3/4	4.6	6.6	20	2		19.11
35334	20 / 15	22	1/2	1	4.6	6.7	20	2		19.91
35335	20	22	3/4	1	4.7	6.8	20	2		19.91
35336	20 / 25	22	1	1	5.2	7.3	20	2		19.91
35337	25	28	1	1 1/4	5.5	7.8	20	2		33.16
35338	32	35	1 1/4	1 1/2	5.9	8.5	20	2		43.10
35339	40	42	1 1/2	1 3/4	6	9	25		1	49.66
35340	50	54	2	2 3/8	6.8	10.3	15		1	86.23

Geberit Mapress Stainless Steel adaptor union with male thread, union nut made of CrNi steel



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Flat gasket made of EPDM
- Pressing socket with transparent protection plug

Technical data


Media temperature with flat gasket EPDM	0–100 °C
Material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, Ø [mm]	R ["]	G ["]	H [cm]	L [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
35360	12 / 15	15	1/2	3/4	4.4	6.4	50	2		23.20
35361	12 / 20	15	3/4	3/4	4.6	6.6			1	23.20
35362	15	18	1/2	3/4	4.4	6.4	50	2		26.52
35363	15 / 20	18	3/4	3/4	4.6	6.6		5	1	26.52
35364	20 / 15	22	1/2	1	4.6	6.7		5	1	27.62
35365	20	22	3/4	1	4.7	6.8	50	2		27.62
35366	20 / 25	22	1	1	5.2	7.3			1	27.62
35367	25	28	1	1 1/4	5.5	7.8	30	2		41.99
35368	32	35	1 1/4	1 1/2	5.9	8.5	20	2		56.14
35369	40	42	1 1/2	1 3/4	6	9	20		1	64.95
35370	50	54	2	2 3/8	6.8	10.3	15		1	112.25

Geberit Mapress Stainless Steel

Geberit Mapress Stainless Steel
Adaptors and connections, detachable

Geberit Mapress Stainless Steel adaptor union with male thread and plain end



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics


- Silicone-free (LABS-free)
- Union nut made of brass
- Flat gasket made of EPDM

Technical data

Media temperature with flat gasket EPDM	0–100 °C
Material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, ø [mm]	R ["]	G ["]	H [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
35400	12	15	1/2	3/4	8.6		1	23.20
35402	15	18	1/2	3/4	8.6		1	26.52
35405	20	22	3/4	1	9.2		1	27.62
35407	25	28	1	1 1/4	10.1	5	1	41.99
35408	32	35	1 1/4	1 1/2	10.9		1	56.14
35409	40	42	1 1/2	1 3/4	11.5		1	64.95
35410	50	54	2	2 3/8	12.9		1	112.25

Geberit Mapress Stainless Steel adaptor union with female thread



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics


- Pressing indicator
- Leaky if unpressed
- Union nut made of brass
- Seal ring made of CIIR, black
- Flat gasket made of EPDM
- Pressing socket with transparent protection plug

Technical data

Media temperature with flat gasket EPDM	0–100 °C
Material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, ø [mm]	Rp ["]	G ["]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
35300	12 / 15	15	1/2	3/4	5.9	2.6	25	5		17.68
35301	12 / 20	15	3/4	3/4	6.1	2.6			1	17.68
35302	15	18	1/2	3/4	5.9	2.6	25	5		19.11
35303	15 / 20	18	3/4	3/4	6.1	2.6		5	1	19.11
35304	20	22	3/4	1	6.3	2.7	50	2		19.91
35305	20 / 25	22	1	1	6.6	2.8	25	5		19.91
35306	25	28	1	1 1/4	7.1	3.1	30	2		33.16
35307	32	35	1 1/4	1 1/2	7.7	3.2	20	2		43.10
35308	40	42	1 1/2	1 3/4	8.2	3.3	25		1	49.66
35309	50	54	2	2 3/8	9.5	3.7		5	1	86.23

Geberit Mapress Stainless Steel adaptor union with female thread, union nut made of CrNi steel



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Flat gasket made of EPDM
- Pressing socket with transparent protection plug

Technical data

Media temperature with flat gasket EPDM	0–100 °C
Material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, ø [mm]	Rp ["]	G ["]	L [cm]	Z [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
35350	12 / 15	15	1/2	3/4	5.9	2.6	5	1	23.20
35357	12 / 20	15	3/4	3/4	6.1	2.6		1	23.20
35351	15	18	1/2	3/4	5.9	2.6	5	1	26.52
35358	15 / 20	18	3/4	3/4	6.1	2.6		1	26.52
35352	20	22	3/4	1	6.3	2.7	5	1	27.62
35359	20 / 25	22	1	1	6.6	2.8		1	27.62
35353	25	28	1	1 1/4	7.1	3.1	5	1	41.99
35354	32	35	1 1/4	1 1/2	7.7	3.2	5	1	56.14
35355	40	42	1 1/2	1 3/4	8.2	3.3	5	1	64.95
35356	50	54	2	2 3/8	9.5	3.7		1	112.25

Geberit Mapress Stainless Steel adaptor union with female thread and plain end



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Silicone-free (LABS-free)
- Union nut made of brass
- Flat gasket made of EPDM

Technical data


Media temperature with flat gasket EPDM	0–100 °C
Material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, ø [mm]	Rp ["]	G ["]	H [cm]	L [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
35380	12	15	1/2	3/4	5.9	8.1		1	23.20
35382	15	18	1/2	3/4	5.9	8.1		1	26.52
35384	20	22	3/4	1	6.4	8.7		1	27.62
35386	25	28	1	1 1/4	6.7	9.4		1	41.99
35387	32	35	1 1/4	1 1/2	7.2	10.1		1	56.14
35388	40	42	1 1/2	1 3/4	7.7	10.7	5	1	64.95
35389	50	54	2	2 3/8	8.4	12		1	112.25

Geberit Mapress Stainless Steel

Geberit Mapress Stainless Steel
Adaptors and connections, detachable

Geberit Mapress adaptor union with clamping ring for corrugated pipes, NPW, plain end

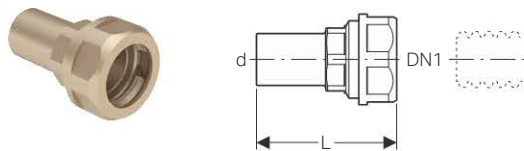

Application purposes


- For heating water
- For cooling water without antifreeze agent
- For cooling water with antifreeze agent
- Only suitable for liquid media

Technical data

Material	DR brass CW602N
----------	-----------------

Art. no.	DN	DN	d, \emptyset [mm]	L [cm]	PN [bar]	SU2 [pc.]	GBP/pc.
22421	12	16	15	6.4	10	2	12.91
22431	12	20	15	6.7	10	2	15.06
22422	15	16	18	6.4	10	2	13.99
22432	15	20	18	6.7	10	2	16.14
22423	20	16	22	6.8	10	2	15.06
22433	20	20	22	6.8	10	2	17.20
22444	25	25	28	6.8	10	2	23.66

Geberit Mapress Stainless Steel flange PN 10/16, with pressing socket

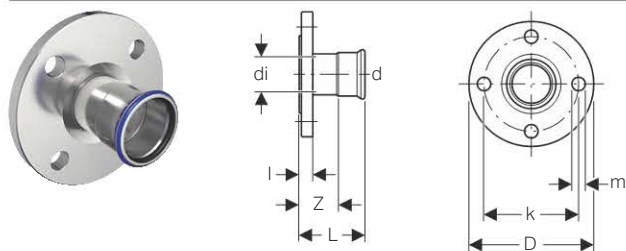

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug
- Design B1 (raised sealing strip with standard sealing strip), EN 1092-1

Technical data


Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, \emptyset [mm]	di, \emptyset [mm]	D [cm]	k [mm]	m [mm]	L [cm]	l [cm]	Z [cm]	n [pc.]	PN [bar]	SU1 [pc.]	GBP/pc.
33732	15 / 12	15	15	9.5	65	14	6.1	1.6	4.1	4	10 / 16	1	40.35
33733	15	18	15	9.5	65	14	6.2	1.6	4.2	4	10 / 16	1	41.46
33734	20	22	19	10.5	75	14	6.5	1.8	4.4	4	10 / 16	1	49.04
33735	25	28	25	11.5	85	14	6.9	1.8	4.6	4	10 / 16	1	59.95
33736	32	35	32	14	100	18	7.2	1.8	4.6	4	10 / 16	1	84.67
33737	40	42	39	15	110	18	7.9	1.8	4.9	4	10 / 16	1	99.31
33738	50	54	51	16.5	125	18	8.7	1.8	5.2	4	10 / 16	1	122.47
33739	65	76.1	72	18.5	145	18	11.8	1.8	6.5	4	10 / 16	1	193.45
33740	80	88.9	84.8	20	160	18	12.5	2	6.5	8	10 / 16	1	229.90
33741	100	108	103.9	22	180	18	13	2	5.5	8	10 / 16	1	272.89

Accessories

- Geberit flange gasket PN 10/16 → p. 95
- Geberit bolt set for flange connection, made of CrNi steel → p. 96

Geberit Mapress Stainless Steel flange PN 10/16, with plain end

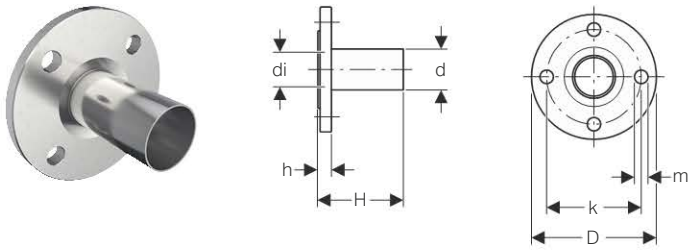

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Silicone-free (LABS-free)
- Design B1 (raised sealing strip with standard sealing strip), EN 1092-1

Technical data


Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, \emptyset [mm]	di, \emptyset [mm]	D [cm]	k [mm]	m [mm]	H [cm]	h [cm]	n [pc.]	PN [bar]	SU1 [pc.]	GBP/pc.
33748	50	54	51	16.5	125	18	11.3	1.8	4	10 / 16	1	166.79
33749	65	76.1	72	18.5	145	18	13.6	1.8	4	10 / 16	1	190.94
33750	80	88.9	84.8	20	160	18	15.2	2	8	10 / 16	1	223.52
33752	100	108	103.9	22	180	18	16.5	2	8	10 / 16	1	267.79

Accessories

- Geberit flange gasket PN 10/16 → p. 95
- Geberit bolt set for flange connection, made of CrNi steel → p. 96

Geberit Mapress Stainless Steel flanged stub with plain end, for loose flange PN 6

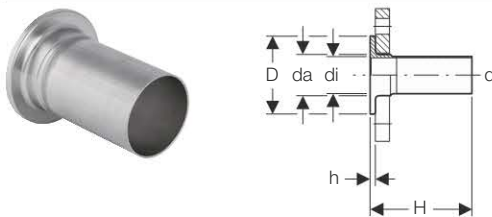

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Silicone-free (LABS-free)
- Suitable for loose flange, in accordance with EN 1092-1, flange type 02

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, \emptyset [mm]	da [mm]	di, \emptyset [mm]	D [cm]	H [cm]	h [cm]	PN [bar]	SU1 [pc.]	GBP/pc.
36150	25	28	32	25.6	6	13.5	0.6	6	1	60.67
36151	32	35	40	32	7	13.5	0.6	6	1	87.35
36152	40	42	47	39	8	13.5	0.6	6	1	101.93
36153	50	54	59	51	9	13.5	0.8	6	1	126.19
36154	65	76.1	78	73.1	11	13.5	0.8	6	1	198.98
36155	80	88.9	91	84.9	12.8	13.5	1	6	1	232.97
36156	100	108	110	104	14.8	13.5	1	6	1	279.09


To order additionally

- Loose flange

Accessories

- Geberit flange gasket PN 6 → p. 95
- Geberit bolt set for flange connection, made of CrNi steel → p. 96

Geberit Mapress Stainless Steel flanged stub with plain end, for loose flange PN 10/16



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Silicone-free (LABS-free)
- Suitable for loose flange, in accordance with EN 1092-1, flange type 02

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, Ø [mm]	da [mm]	di, Ø [mm]	D [cm]	H [cm]	h [cm]	PN [bar]	SU1 [pc.]	GBP/pc.
36141	20	22	27	19.6	5.8	13.5	0.6	10 / 16	1	56.42
36142	25	28	32	25.6	6.8	13.5	0.6	10 / 16	1	68.82
36143	32	35	40	32	7.8	13.5	0.6	10 / 16	1	99.41
36144	40	42	47	39	8.8	13.5	0.6	10 / 16	1	115.61
36145	50	54	59	51	10.2	13.5	0.8	10 / 16	1	143.14
36146	65	76.1	78	72.1	12.2	13.5	0.8	10 / 16	1	225.74
36147	80	88.9	91	84.9	13.8	13.5	1	10 / 16	1	264.27
36148	100	108	110	104	15.8	13.5	1	10 / 16	1	316.56

To order additionally


- Loose flange

Accessories

- Geberit flange gasket PN 10/16 → p. 95
- Geberit bolt set for flange connection, made of CrNi steel → p. 96

1.2.10 Compensators

Geberit Mapress Stainless Steel axial expansion fitting with pressing sockets

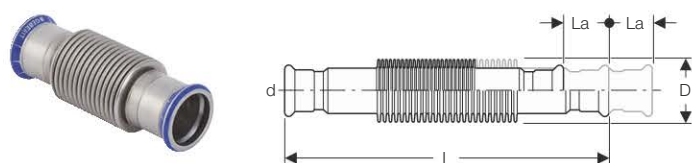

Application purposes

- For cold and hot potable water
- For heating water
- For cooling water without antifreeze agent
- For cooling water with antifreeze agent
- For remote network heating water $\leq 120\text{ }^{\circ}\text{C}$
- For service water
- For treated water
- For rainwater with a pH value of > 6.0
- For grey and black water with pH value > 6.0
- For technical building systems, industry and shipbuilding
- Exclusively for absorption of axial linear expansion during operation

Characteristics


- Pressing indicator
- Silicone-free (LABS-free)
- Leaky if unpressed
- Bellows made of stainless steel
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)						
Art. no.	DN	d, \varnothing [mm]	D [cm]	La [cm]	L [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
33932	12	15	2.6	+/- 0.7	15.1		1	89.06
33933	15	18	2.6	+/- 0.7	14.7		1	94.06
33934	20	22	3.1	+/- 1.1	10.6		1	108.62
33935	25	28	3.9	+/- 1.3	12		1	117.31
33936	32	35	4.6	+/- 1.3	13.9	5	1	131.87
33937	40	42	5.9	+/- 1.3	14.9		1	236.89
33938	50	54	7	+/- 1.8	17.6		1	269.90
33939	65	76.1	8.8	+/- 2.2	26.2		1	335.45
33940	80	88.9	11.7	+/- 2.3	28.6		1	377.19
33941	100	108	14.4	+/- 2.3	54.2		1	766.28

1.2.11 Feed-throughs

Geberit Mapress Stainless Steel bulkhead and deck passing with two plain ends

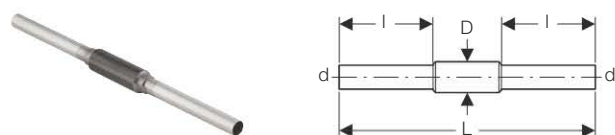

Application purposes

- For industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media \rightarrow p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media \rightarrow p. 10

Characteristics

- Silicone-free (LABS-free)
- Protective tube for welding
- Protective tube made of steel 1.0039, coated

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)						
Art. no.	DN	d, \varnothing [mm]	D [cm]	L [cm]	l [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
90980	12	15	2.5	45	16.5	5	1	46.45
90981	15	18	3	45	16.5		1	47.59
90982	20	22	3.4	45	16.5	5	1	49.92
90983	25	28	3.8	45	16.5	5	1	54.57
90984	32	35	4.5	45	16.5	5	1	66.17
90985	40	42	5.4	45	16.5	5	1	78.95
90986	50	54	7	45	16.5	5	1	87.08
90987	65	76.1	8.9	45	16.5		1	197.35
90988	80	88.9	10.8	45	16.5		1	220.59
90989	100	108	13.3	45	16.5		1	243.80

1.2.12 Sealings

Geberit Mapress Stainless Steel cap



Application purposes

- For technical building systems, industry and shipbuilding
- For permanent termination of pipe ends
- Application overview: Geberit Mapress Stainless Steel for liquid media \rightarrow p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media \rightarrow p. 10

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)						
Art. no.	DN	d, \varnothing [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
33212	12	15	2.3	0.3	50	10		8.68
33213	15	18	2.3	0.3	50	5		10.43
33214	20	22	2.4	0.3	50	5		11.27
33215	25	28	2.6	0.3	50	5		13.57
33216	32	35	2.9	0.3	50	5		18.95
33217	40	42	3.3	0.3	25		1	41.27
33218	50	54	3.8	0.3	25		1	45.41
33219	65	76.1	6	0.7			1	57.78
33220	80	88.9	6.7	0.7			1	70.38
33221	100	108	8.2	0.7			1	97.48

1.2.13 Connections

Geberit Mapress Stainless Steel elbow tap connector 90°



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics


- Pressing indicator
- Leaky if unpressed
- Two fastening points
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, Ø [mm]	Rp ["]	L [cm]	l [cm]	l1 [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
L1 / length: 4.3 cm											
33013	10 / 15	12	1/2	4.6	1.3	1.5	2.9		5	1	17.30
33403	12 / 15	15	1/2	5	1.3	1.5	3	100	20		17.09
33405	15	18	1/2	5	1.3	1.5	3	100	20		18.40
L1 / length: 5.1 cm											
33407	20	22	3/4	5.4	1.7	1.6	3.3	50	10		26.45

Geberit Mapress Stainless Steel corner elbow 90°, offset



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics


- Pressing indicator
- Leaky if unpressed
- Two fastening points
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, Ø [mm]	Rp ["]	d1, Ø [mm]	L [cm]	L1 [cm]	l [cm]	l1 [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
33503	12 / 15 / 12	15	1/2	15	6	4.3	1.3	1.5	4	50	5	26.26

Geberit Mapress Stainless Steel T-elbow tap connector 90°, offset



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Leaky if unpressed
- Two fastening points
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data


Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	l [cm]	l1 [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
L1 / length: 6.5 cm										
33423	12 / 15	15	1/2	5	3.5	1.5	3	50	10	16.92
33425	15	18	1/2	5	3.5	1.5	3	50	10	18.26
33427	20	22	3/4	5.4	3.1	1.6	3.3	25	5	26.18

1.3 Geberit Mapress Stainless Steel, Gas

1.3.1 System pipes 1.4401

Geberit Mapress Stainless Steel system pipe, CrNiMo, small bundle (gas)



Application purposes

- For natural and liquefied gases
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Silicone-free (LABS-free)
- Pipe end with blue protection plug


Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
Surface roughness	1.5 µm
Thermal expansion	0.0165 mm/(m · K)
Thermal conductivity, pipe	15 W/(m · K)

Art. no.	DN	d, ø [mm]	di, ø [mm]	s [mm]	L [m]	SU3 [m]	SU2 [m]	GBP/m
39202	12	15	13	1	6	120		7.31
39203	15	18	16	1	6	90		8.63
39204	20	22	19.6	1.2	6	60		11.67
39205	25	28	25.6	1.2	6	60		14.39
39206	32	35	32	1.5	6	30		21.19
39207	40	42	39	1.5	6	30		26.08
39208	50	54	51	1.5	6	30		33.17
39209	65	76.1	72.1	2	6		6	67.25
39210	80	88.9	84.9	2	6		6	76.61
39211	100	108	104	2	6		6	92.29

1.3.2 Pipe nipples

Geberit Mapress Stainless Steel pipe nipple (gas)

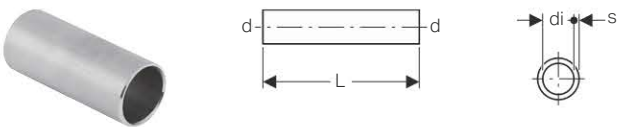

Application purposes

- For shortest construction length between two pressing sockets
- For natural and liquefied gases
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10


Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	di, ø [mm]	s [mm]	L [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
32050	12	15	13	1	5		1	2.65
32051	15	18	16	1	5	5	1	2.87
32052	20	22	19.6	1.2	5.2	5	1	3.07
32053	25	28	25.6	1.2	5.6	5	1	3.91
32054	32	35	32	1.5	6.2		1	5.02
32055	40	42	39	1.5	8		1	7.11
32056	50	54	51	1.5	9		1	9.23
32057	65	76.1	72.1	2	13.6		1	38.02
32058	80	88.9	84.9	2	15		1	44.33
32059	100	108	104	2	18		1	62.04

1.3.3 Couplings

Geberit Mapress Stainless Steel coupling (gas)



Application purposes

- For natural and liquefied gases
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics


- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34101	12	15	4.8	0.8	25	5		5.90
34102	15	18	4.8	0.8	25	5		6.34
34103	20	22	5	0.8	50	5		7.42
34104	25	28	5.4	0.8	50	5		8.41
34105	32	35	6.2	1	50	5		10.39
34106	40	42	7.1	1.1	24	4		14.20
34107	50	54	8.3	1.3	50	2		17.04
34248	65	76.1	14.1	3.5	20		1	84.28
34249	80	88.9	16.2	4.2	5		1	96.34
34250	100	108	19.4	4.4	5		1	122.39

Geberit Mapress Stainless Steel slip coupling (gas)



Application purposes

- For natural and liquefied gases
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug


Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, \varnothing [mm]	E [cm]	L [cm]	Z [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34108	12	15	2.5	8	3		1	9.79
34109	15	18	2.5	8	3		1	10.20
34110	20	22	2.5	8.4	3.4	5	1	11.64
34111	25	28	3	9.1	3.1	5	1	13.48
34112	32	35	3	10.2	4.2		1	15.07
34113	40	42	4	12	4		1	17.52
34114	50	54	4	14	6		1	22.37
34162	65	76.1	6	23	11		1	79.05
34121	80	88.9	7	26	12		1	129.72
34122	100	108	8	31	15		1	168.58

1.3.4 Reducers

Geberit Mapress Stainless Steel reducer with plain end (gas)



Application purposes

- For natural and liquefied gases
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug


Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, \varnothing [mm]	d1, \varnothing [mm]	H [cm]	L [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34115	15 / 12	18	15	3.5	5.5		5	1	6.54
34116	20 / 12	22	15	3.9	5.9		5	1	7.20
34117	20 / 15	22	18	3.7	5.7	25	5		7.20
34118	25 / 12	28	15	4.6	6.6			1	8.18
34119	25 / 15	28	18	4.4	6.4		5	1	8.18
34120	25 / 20	28	22	3.9	6	50	5		8.18
34123	32 / 20	35	22	5	7.1		5	1	13.88
34124	32 / 25	35	28	4.5	6.8	25	5		13.88
34127	40 / 20	42	22	6.1	8.2			1	14.05
34128	40 / 25	42	28	6	8.3		5	1	25.25
34129	40 / 32	42	35	5.1	7.7		5	1	25.25
34132	50 / 20	54	22	7.4	9.5			1	19.88
34133	50 / 25	54	28	8.7	11		5	1	35.33
34134	50 / 32	54	35	8	10.6		5	1	35.33
34135	50 / 40	54	42	6.2	9.2		5	1	35.33
34296	65 / 50	76.1	54	11.1	14.6	5		1	75.73
34297	80 / 50	88.9	54	12.8	16.3	5		1	80.77
34298	80 / 65	88.9	76.1	10.8	16.1			1	80.77
34259	100 / 50	108	54	13.7	17.2			1	88.34
34260	100 / 65	108	76.1	13.1	18.4			1	88.34
34261	100 / 80	108	88.9	14.3	20.3			1	88.34

1.3.5 Bends

Geberit Mapress Stainless Steel bend (gas)



Application purposes

- For natural and liquefied gases
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug


Technical data

Material		CrNiMo steel 1.4401 (EN 10088)						
Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
arc / angle: 45°								
34014	12	15	3.6	1.6		5	1	9.06
34015	15	18	3.7	1.7		5	1	10.20
34016	20	22	4.2	2.1	50	5		12.37
34017	25	28	4.8	2.5	50	5		15.66
34193	32	35	4.3	1.7	20	2		23.35
34194	40	42	5.1	2.1		5	1	36.60
34195	50	54	6.2	2.7		5	1	50.48
34447	65	76.1	10.3	5	5		1	129.34
34448	80	88.9	11.7	5.7			1	158.53
34449	100	108	14.5	7			1	216.75
arc / angle: 90°								
34000	12	15	4.9	2.9	50	5		9.06
34001	15	18	5.3	3.3	50	5		10.20
34002	20	22	6.1	4	50	5		12.37
34003	25	28	7.2	4.9	50	5		15.66
34187	32	35	6.8	4.2	50	5		23.35
34188	40	42	8	5	48	4		36.60
34189	50	54	10	6.5	25		1	50.48
34441	65	76.1	15.9	10.6	5		1	129.34
34442	80	88.9	18.5	12.5	5		1	158.53
34443	100	108	23	15.5	5		1	216.75



- Bend 45° / 90° in the dimensions d76.1 / 88.9 / 108 with new masses as of 01.04.2017

Geberit Mapress Stainless Steel bend with plain end (gas)



Application purposes

- For natural and liquefied gases
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug


Technical data

Material		CrNiMo steel 1.4401 (EN 10088)							
Art. no.	DN	d, ø [mm]	H [cm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
arc / angle: 45°									
34021	12	15	4.5	3.6	1.6		5	1	9.06
34022	15	18	4.2	3.7	1.7	25	5		10.20
34023	20	22	5.2	4.2	2.1	50	5		12.37
34024	25	28	5.6	4.8	2.5	50	5		15.66
34196	32	35	5.3	4.3	1.7	20	2		23.35
34197	40	42	6.1	5.1	2.1		5	1	36.60
34198	50	54	7.3	6.2	2.7	24	2		50.48
34450	65	76.1	11.1	10.3	5			1	129.34
34451	80	88.9	12.8	11.7	5.7			1	158.53
34452	100	108	15.8	14.5	7			1	216.75
arc / angle: 90°									
34007	12	15	5.9	4.9	2.9	25	5		9.06
34008	15	18	6.1	5.3	3.3	25	5		10.20
34009	20	22	7	6.1	4	50	5		12.37
34010	25	28	7.9	7.2	4.9	50	5		15.66
34190	32	35	7.7	6.8	4.2	50	2		23.35
34191	40	42	9	8	5	24	2		36.60
34192	50	54	11.1	10	6.5	25		1	50.48
34444	65	76.1	16.7	15.9	10.6	5		1	129.34
34445	80	88.9	19.5	18.5	12.5			1	158.53
34446	100	108	24.1	23	15.5			1	216.75



- Bend 45° / 90° in the dimensions d76.1 / 88.9 / 108 with new masses as of 01.04.2017

Geberit Mapress Stainless Steel bend with plain ends (gas)



Application purposes

- For natural and liquefied gases
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø	H	H1	K	K1	SU3	SU2	SU1	GBP/pc.
		[mm]	[cm]	[cm]	[cm]	[cm]	[pc.]	[pc.]	[pc.]	

arc / angle: 90°

30402	12	15	7	12	2.2	7.2	50	10		9.17
30403	15	18	7	12	1.7	6.7	50	10		9.37
30404	20	22	7	12	0	5	50	10		9.92
30405	25	28	8	12	0	4	50	10		10.28
30406	32	35	12	20	2	10		5	1	21.55
30407	40	42	15	25	3	13		5	1	26.52
30408	50	54	20	30	5.5	15.5		5	1	33.16
30089	65	76.1	16.6	28.6	0	12			1	103.91
30090	80	88.9	19.4	31.9	0	12.5			1	117.18
30091	100	108	24	37.7	0	13.7			1	140.41

arc / angle: 30°

30892	12	15	6	12.2	2.1	8.3			1	9.17
30893	15	18	5.5	12.8	1.5	8.8			1	9.37
30894	20	22	5	12.4	0.7	8.1			1	9.92
30905	25	28	4.5	13.4	0	8.9		5	1	10.28
30906	32	35	7.3	22.2	2	16.9			1	21.55
30907	40	42	8.9	28	3	22.1			1	26.52
30908	50	54	12.2	33.7	4.5	26			1	33.16
30009	65	76.1	8.4	20.4	0	12			1	103.91
30010	80	88.9	9.5	22	0	12.5			1	117.18
30011	100	108	11.7	25.4	0	13.7			1	140.41

arc / angle: 45°


30872	12	15	6.2	12	1.9	7.7		5	1	9.17
30873	15	18	5.8	12.4	1.6	8.2			1	9.37
30874	20	22	5.6	12	0.7	7.1			1	9.92
30875	25	28	5.8	12.2	0.2	6.6			1	10.28
30876	32	35	9.4	20.6	2	13.2			1	21.55
30877	40	42	11.4	26.2	0.1	14.9			1	26.52
30878	50	54	14.6	32.1	3.7	21.2			1	33.16
30049	65	76.1	11.1	23	0	11.9			1	103.91
30050	80	88.9	13	25.2	0	12.2			1	117.18
30051	100	108	15.7	29.4	0	13.7			1	140.41

arc / angle: 60°

30942	12	15	6	12.2	2.1	8.3			1	9.17
30943	15	18	6.2	12.2	1.6	7.6			1	9.37
30944	20	22	6	11.8	0.5	6.3			1	9.92
30955	25	28	6.3	12.1	0	5.8			1	10.28
30956	32	35	9.7	20.3	2	12.6			1	21.55
30957	40	42	12	25.6	3	16.6			1	26.52
30958	50	54	16.2	30.6	5.5	19.9			1	33.16
30069	65	76.1	12.6	24.6	0	12			1	103.91
30070	80	88.9	14.6	27.1	0	12.5			1	117.18
30071	100	108	18	31.7	0	13.7			1	140.41

Art. no.	DN	d, ø	H	H1	K	K1	SU3	SU2	SU1	GBP/pc.
		[mm]	[cm]	[cm]	[cm]	[cm]	[pc.]	[pc.]	[pc.]	
arc / angle: 90°										
30402	12	15	7	12	2.2	7.2	50	10		9.17
30403	15	18	7	12	1.7	6.7	50	10		9.37
30404	20	22	7	12	0	5	50	10		9.92
30405	25	28	8	12	0	4	50	10		10.28
30406	32	35	12	20	2	10		5	1	21.55
30407	40	42	15	25	3	13		5	1	26.52
30408	50	54	20	30	5.5	15.5		5	1	33.16
30089	65	76.1	16.6	28.6	0	12			1	103.91
30090	80	88.9	19.4	31.9	0	12.5			1	117.18
30091	100	108	24	37.7	0	13.7			1	140.41

Geberit Mapress Stainless Steel bend with plain ends, long



Application purposes


- For natural and liquefied gases
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø	H	H1	SU1	GBP/pc.
		[mm]	[cm]	[cm]	[pc.]	
30414	20	22	7	84	1	28.00
30415	25	28	8	85	1	30.00

Geberit Mapress Stainless Steel pipe bridge (gas)

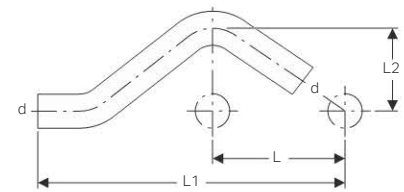

Application purposes

- For crossing parallel pipes with distance L
- For natural and liquefied gases
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10


Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø	L	L1	L2	SU3	SU2	SU1	GBP/pc.
		[mm]	[cm]	[cm]	[cm]	[pc.]	[pc.]	[pc.]	
30802	12	15	5.7	15.8	3	25	5		7.91
30803	15	18	6	16.6	3.1	25	5		8.18
30804	20	22	6.5	17.9	3.3	25	5		9.29
30805	25	28	7.3	20.6	3.6			1	11.25

1.3.6 T-pieces

Geberit Mapress Stainless Steel T-piece, equal (gas)



Application purposes

- For natural and liquefied gases
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10


Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)									
Art. no.	DN	d, ø [mm]	L [cm]	L1 [cm]	I [cm]	Z [cm]	Z1 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34028	12	15	6.4	3.9	3.2	1.2	1.9		5	1	13.70
34029	15	18	6.8	4.1	3.4	1.4	2.1		5	1	15.61
34030	20	22	7.4	4.4	3.7	1.6	2.3	25	5		16.78
34031	25	28	8.4	5	4.2	1.9	2.7	25	5		19.69
34032	32	35	10	5.7	5	2.4	3.1		5	1	24.87
34033	40	42	11.4	6.5	5.7	2.7	3.5		5	1	35.35
34034	50	54	13.8	7.7	6.9	3.4	4.2		5	1	42.24
34285	65	76.1	23	11	11.5	6.2	5.7			1	232.70
34286	80	88.9	26	12.8	13	7	6.8			1	254.61
34287	100	108	31	15.3	15.5	8	7.8			1	314.27

Geberit Mapress Stainless Steel T-piece, reduced (gas)



Application purposes

- For natural and liquefied gases
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10


Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)														
Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	L [cm]	L1 [cm]	I [cm]	I2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.		
34035	15 / 12 / 15	18	15	18	6.8	4.1	3.4	3.4	1.4	2.1	1.4		1	14.13		
34036	20 / 12 / 20	22	15	22	7.4	4.3	3.7	3.7	1.6	2.3	1.6	5	1	15.14		
34037	20 / 15 / 20	22	18	22	7.4	4.3	3.7	3.7	1.6	2.3	1.6		1	15.14		
34038	25 / 12 / 25	28	15	28	8.4	4.6	4.2	4.2	1.9	2.6	1.9		1	18.27		
34039	25 / 15 / 25	28	18	28	8.4	4.6	4.2	4.2	1.9	2.6	1.9		1	18.27		
34040	25 / 20 / 25	28	22	28	8.4	4.7	4.2	4.2	1.9	2.6	1.9	5	1	18.27		
34041	32 / 12 / 32	35	15	35	10	4.9	5	5	2.4	2.9	2.4		1	22.32		
34042	32 / 15 / 32	35	18	35	10	4.9	5	5	2.4	2.9	2.4		1	22.72		
34043	32 / 20 / 35	35	22	35	10	5	5	5	2.4	2.9	2.4	5	1	22.72		
34044	32 / 25 / 32	35	28	35	10	5.3	5	5	2.4	3	2.4	5	1	22.72		
34140	40 / 12 / 40	42	15	42	11.4	5.3	5.7	5.7	2.7	3.3	2.7		1	28.89		
34141	40 / 15 / 40	42	18	42	11.4	5.3	5.7	5.7	2.7	3.3	2.7		1	28.89		
34045	40 / 20 / 40	42	22	42	11.4	5.4	5.7	5.7	2.7	3.3	2.7	5	1	32.81		
34046	40 / 25 / 40	42	28	42	11.4	5.7	5.7	5.7	2.7	3.4	2.7	5	1	32.81		
34047	40 / 32 / 40	42	35	42	11.4	6.1	5.7	5.7	2.7	3.5	2.7		1	32.81		
34048	50 / 20 / 50	54	22	54	13.8	6	6.9	6.9	3.4	3.9	3.4	5	1	37.86		
34049	50 / 25 / 50	54	28	54	13.8	6.3	6.9	6.9	3.4	4	3.4	5	1	37.86		
34050	50 / 32 / 50	54	35	54	13.8	6.7	6.9	6.9	3.4	4.1	3.4		1	37.86		
34051	50 / 40 / 50	54	42	54	13.8	7.1	6.9	6.9	3.4	4.1	3.4		1	37.86		
34097	65 / 50 / 65	76.1	54	76.1	23	8.7	11.5	11.5	6.2	5.2	6.2		1	196.91		
34098	80 / 50 / 80	88.9	54	88.9	26	9.3	13	13	7	5.8	7		1	214.59		
34099	100 / 50 / 100	108	54	108	31	11.3	15.5	15.5	8	7.8	8		1	252.45		

Geberit Mapress Stainless Steel T-piece with female thread (gas)



Application purposes

- For natural and liquefied gases
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics


- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)														
Art. no.	DN	d, ø [mm]	Rp ["]	d1, ø [mm]	L [cm]	L1 [cm]	I [cm]	I2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.	
34052	12 / 15 / 12	15	1/2	15	6.4	4	3.2	3.2	1.2	2.7	1.2			1	15.14	
34053	15	18	1/2	18	6.8	4.2	3.4	3.4	1.4	2.9	1.4			1	15.14	
34054	15 / 20 / 15	18	3/4	18	6.8	4.4	3.4	3.4	1.4	2.9	1.4			1	15.14	
34055	20 / 15 / 20	22	1/2	22	7.4	4.3	3.7	3.7	1.6	3	1.6	25	5		17.68	
34056	20	22	3/4	22	7.4	4.6	3.7	3.7	1.6	3.1	1.6			1	17.68	
34057	25 / 15 / 25	28	1/2	28	8.4	4.6	4.2	4.2	1.9	3.3	1.9	25	5		20.18	
34058	25 / 20 / 25	28	3/4	28	8.4	4.9	4.2	4.2	1.9	3.4	1.9			1	20.18	
34059	32 / 15 / 32	35	1/2	35	10	5	5	5	2.4	3.7	2.4		5	1	20.62	
34060	32 / 20 / 32	35	3/4	35	10	5.3	5	5	2.4	3.8	2.4			1	23.97	
34061	40 / 15 / 40	42	1/2	42	11.4	5.3	5.7	5.7	2.7	4	2.7		5	1	27.11	
34126	40 / 20 / 40	42	3/4	42	11.4	5.6	5.7	5.7	2.7	4.1	2.7			1	24.60	
34063	50 / 15 / 50	54	1/2	54	13.8	5.9	6.9	6.9	3.4	4.6	3.4		5	1	34.08	
34264	50 / 20 / 50	54	3/4	54	13.8	6.2	6.9	6.9	3.4	4.7	3.4			1	34.08	
34265	50	54	2	54	13.8	7.9	6.9	6.9	3.4	5.6	3.4			1	34.08	
34266	65 / 20 / 65	76.1	3/4	76.1	23	7.9	11.5	11.5	6.2	6.4	6.2			1	201.96	
34267	65 / 50 / 65	76.1	2	76.1	23	8.9	11.5	11.5	6.2	6.6	6.2			1	201.96	
34268	80 / 20 / 80	88.9	3/4	88.9	26	8.8	13	13	7	7.3	7			1	214.59	
34269	80 / 50 / 80	88.9	2	88.9	26	9.6	13	13	7	7.3	7			1	214.59	
34270	100 / 20 / 100	108	3/4	108	31	10.5	15.5	15.5	8	9	8			1	252.45	
34271	100 / 50 / 100	108	2	108	31	11.5	15.5	15.5	8	9.2	8			1	220.48	

1.3.7 Adaptors, permanent

Geberit Mapress Stainless Steel adaptor to cutting ring connection (gas)



Application purposes

- For natural and liquefied gases
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics


- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	H [cm]	L [cm]	I [cm]	SU1 [pc.]	GBP/pc.
34355	12	15	6	8	5.1	1	12.48

Geberit Mapress Stainless Steel adaptor with male thread (gas)



Application purposes

- For natural and liquefied gases
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug


Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	R [°]	H [cm]	L [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34066	12 / 15	15	1/2	2.1	4.1	50	5		11.34
34142	12 / 20	15	3/4	2.3	4.3			1	10.07
34067	15	18	1/2	2.2	4.2	50	5		12.60
34143	15 / 20	18	3/4	2.4	4.4			1	10.87
34069	20 / 15	22	1/2	2.1	4.2	50	5		13.88
34070	20	22	3/4	2.3	4.4	50	5		13.88
34346	20 / 25	22	1	2.5	4.6	50	5		13.88
34068	25 / 20	28	3/4	2.3	4.6	50	5		17.68
34071	25	28	1	2.3	4.8	50	5		17.68
34075	32 / 25	35	1	2.5	5.1	25	5		25.25
34072	32	35	1 1/4	2.7	5.3	50	2		25.25

Art. no.	DN	d, ø [mm]	R [°]	H [cm]	L [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34076	32 / 25	35	1 1/2	2.7	5.3		5	1	25.25
34073	40	42	1 1/2	2.7	5.7	25		1	37.34
34074	50	54	2	5.4	8.9	25		1	50.48
34077	65	76.1	2 1/2	7	12.3	5		1	229.49
34078	80	88.9	3	7.7	13.7			1	344.35

Geberit Mapress Stainless Steel adaptor with male thread and plain end (gas)



Application purposes


- For natural and liquefied gases
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	R [°]	H [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
31932	12	15	1/2	5.7	25	5		9.92
31933	15	18	1/2	5.7	25	5		11.03
31936	20	22	3/4	5.9	25	5		12.14
31937	25	28	1	6.6	25	5		15.47
31938	32	35	1 1/4	8		5	1	22.11
31939	40	42	1 1/2	9.1		5	1	32.71
31940	50	54	2	10.2		5	1	44.22

Geberit Mapress Stainless Steel adaptor with female thread (gas)



Application purposes

- For natural and liquefied gases
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10


Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)								
Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.	
34083	12 / 15	15	1/2	3.7	0.4	25	5			11.34
34169	12 / 20	15	3/4	3.8	0.3			1		10.07
34084	15	18	1/2	3.7	0.4		5	1		12.60
34170	15 / 20	18	3/4	3.8	0.3			1		10.87
34086	20 / 15	22	1/2	3.6	0.2	25	5			13.88
34087	20	22	3/4	3.9	0.3	25	5			13.88
34347	20 / 25	22	1	4.2	0.4		5	1		13.88
34089	25	28	1	4.4	0.4	50	5			17.68
34093	32 / 25	35	1	4.5	0.2		5	1		25.25
34090	32	35	1 1/4	4.9	0.4		5	1		25.25
34091	40	42	1 1/2	5.3	0.4		5	1		37.34
34092	50	54	2	6.2	0.4		5	1		50.48

Geberit Mapress Stainless Steel adaptor with female thread and plain end (gas)




Application purposes

- For natural and liquefied gases
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)						
Art. no.	DN	d, ø [mm]	Rp ["]	H [cm]	L [cm]	SU1 [pc.]	GBP/pc.	
33846	20 / 15	22	1/2	4.5	5.8	1	14.06	
33848	25 / 15	28	1/2	5.3	6.6	1	18.32	
33850	32 / 15	35	1/2	5.6	6.9	1	24.27	
33852	40 / 15	42	1/2	6.1	7.4	1	31.10	
33854	50 / 15	54	1/2	6.6	7.9	1	37.06	
33860	65 / 15	76.1	1/2	9.1	10.4	1	129.49	
33862	80 / 15	88.9	1/2	10	11.3	1	184.01	
33864	100 / 15	108	1/2	12.1	13.4	1	221.90	

Geberit Mapress Stainless Steel adaptor with female thread and plain end, long (gas)




Application purposes

- For natural and liquefied gases
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)								
Art. no.	DN	d, ø [mm]	Rp ["]	H [cm]	L [cm]	K [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.	
90932	12	15	1/2	13.5	14.8	9	5	1		9.92
90933	15	18	1/2	13.5	14.8	9	5	1		11.03
90934	15	18	3/4	13.3	15.2	9		1		11.03
90935	20	22	1/2	13.9	14.8	8.9	5	1		12.14
90936	20	22	3/4	13.7	15.2	8.7	5	1		12.14

Geberit Mapress Stainless Steel elbow adaptor 90° with male thread (gas)



Application purposes

- For natural and liquefied gases
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics


- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	R ["]	H [cm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34149	12 / 15	15	1/2	3.7	5.7	3.7			1	15.86
34150	15	18	1/2	3.9	5.7	3.7			1	17.09
34151	20	22	3/4	4.6	6	3.9	25	5		21.91
34154	25 / 20	28	3/4	4.6	5.8	3.5			1	28.81
34152	25	28	1	5.4	6.7	4.4		5	1	27.98
34153	32	35	1 1/4	6.3	7.5	4.9			1	40.00

Geberit Mapress Stainless Steel elbow adaptor 90° with female thread (gas)



Application purposes

- For natural and liquefied gases
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Technical data


Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	L1 [cm]	Z [cm]	Z1 [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34144	12 / 15	15	1/2	5.7	3.7	3.7	2.4		1	18.12
34145	15	18	1/2	5.7	3.9	3.7	2.6	5	1	20.46
34146	20	22	3/4	6	4.6	3.9	3.1	5	1	24.40
34147	25	28	1	6.7	5.4	4.3	3.7	5	1	31.60
34148	32	35	1 1/4	7.5	6.3	4.9	4.4		1	53.98

Geberit Mapress Stainless Steel

Geberit Mapress Stainless Steel, Gas
Adaptors and connections, detachable

Geberit Mapress Stainless Steel elbow adaptor 90° with female thread and plain end (gas)



Application purposes

- For natural and liquefied gases
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10


Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	Rp [""]	H [cm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
33203	12 / 15	15	1/2	5.3	3.6	2.3	25	5	13.81

1.3.8 Adaptors and connections, detachable

Geberit Mapress Stainless Steel adaptor union with male thread, union nut made of CrNi steel (gas)



Application purposes

- For connecting to house supply pipes
- For connecting measuring devices, control valves and protection devices
- For connecting gas devices
- For natural and liquefied gases
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics


- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Flat gasket made of Centellen® HD WS 3822
- Pressing socket with yellow protection plug

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	R [""]	G [""]	H [cm]	L [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34430	12 / 15	15	1/2	3/4	4.4	6.4	5	1	20.18
34431	12 / 20	15	3/4	3/4	4.6	6.6		1	20.18
34432	15	18	1/2	3/4	4.4	6.4		1	21.83
34433	15 / 20	18	3/4	3/4	4.6	6.6		1	21.83
34434	20 / 15	22	1/2	1	4.6	6.7		1	22.72
34435	20	22	3/4	1	4.7	6.8	5	1	22.72
34436	20 / 25	22	1	1	5.2	7.3		1	22.72
34437	25	28	1	1 1/4	5.5	7.8	5	1	37.86
34438	32	35	1 1/4	1 1/2	5.9	8.5	5	1	49.22
34439	40	42	1 1/2	1 3/4	6	9		1	56.69
34440	50	54	2	2 3/8	6.8	10.3	5	1	98.46

Geberit Mapress Stainless Steel adaptor union with female thread, union nut made of CrNi steel (gas)



Application purposes

- For connecting to house supply pipes
- For connecting measuring devices, control valves and protection devices
- For connecting gas devices
- For natural and liquefied gases
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Flat gasket made of Centellen® HD WS 3822
- Pressing socket with yellow protection plug

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	Rp [""]	G [""]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
34400	12 / 15	15	1/2	3/4	5.9	2.6	1	20.18
34401	12 / 20	15	3/4	3/4	6.1	2.6	1	20.18
34402	15	18	1/2	3/4	5.9	2.6	1	21.83
34403	15 / 20	18	3/4	3/4	6.1	2.6	1	21.83
34404	20	22	3/4	1	6.3	2.7	1	22.72
34405	20 / 25	22	1	1	6.6	2.8	1	22.72
34406	25	28	1	1 1/4	7.1	3.1	1	37.86
34407	32	35	1 1/4	1 1/2	7.7	3.2	1	49.22
34408	40	42	1 1/2	1 3/4	8.2	3.3	1	56.69
34409	50	54	2	2 3/8	9.5	3.7	1	98.46

Geberit Mapress Stainless Steel adaptor with union nut made of CrNi steel (gas)



Application purposes

- For natural and liquefied gases
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Leaky if unpressed
- Conical sealing
- Marked in yellow
- Seal ring made of HNBR, yellow
- O-ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)								
Art. no.	DN	d, ø [mm]	G ["]	L [cm]	Z [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.		
34156	PO	12	15	7/8	3.3	0.9		1	16.31	
34158		20	22	1 1/8	4.2	1.6		1	18.85	
34161		20	22	1 3/8	4	1.9	5	1	18.85	
34159		25	28	1 3/8	4.5	1.7	5	1	24.51	

PO: Phase out as of April 2017

Geberit Mapress Stainless Steel adaptor with union nut made of CrNi steel and plain end (gas)



Application purposes

- Suitable exclusively for pressing in Geberit Mapress pressing sockets
- For natural and liquefied gases
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10


Characteristics

- Conical sealing
- Marked in yellow
- Union nut with hole for sealing
- O-ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)						
Art. no.	DN	d, ø [mm]	G ["]	H [cm]	Z [cm]	SU1 [pc.]	GBP/pc.	
34214	25	28	1 3/8	12.8	2.4	1	22.74	

Geberit Mapress Stainless Steel flange PN 10/16, with pressing socket (gas)

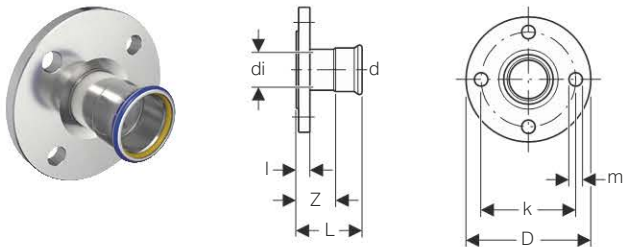

Application purposes

- For natural and liquefied gases
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Leaky if unpressed

- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug
- Design B1 (raised sealing strip with standard sealing strip), EN 1092-1

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)											
Art. no.	DN	d, ø [mm]	di, ø [mm]	D [cm]	k [mm]	m [mm]	L [cm]	l [cm]	Z [cm]	n [pc.]	PN [bar]	SU1 [pc.]	GBP/pc.
34204	25	22	19	10.5	75	14	6.5	1.8	4.4	4	10 / 16	1	57.42
34205	25	28	25	11.5	85	14	6.9	1.8	4.6	4	10 / 16	1	70.27
34206	32	35	32	14	100	18	7.2	1.8	4.6	4	10 / 16	1	99.13
34207	40	42	39	15	110	18	7.9	1.8	4.9	4	10 / 16	1	116.29
34208	50	54	51	16.5	125	18	8.7	1.8	5.2	4	10 / 16	1	143.44
34209	65	76.1	72	18.5	145	18	11.8	1.8	6.5	4	10 / 16	1	235.75
34210	80	88.9	84.8	20	160	18	12.5	2	6.5	8	10 / 16	1	279.46
34211	100	108	103.9	22	180	18	13	2	5.5	8	10 / 16	1	331.49


Accessories

- Geberit flange gasket PN 10/16 → p. 95
- Geberit bolt set for flange connection, made of CrNi steel → p. 96

Geberit Mapress Stainless Steel

Geberit Mapress Stainless Steel, Gas
Adaptors and connections, detachable

Geberit Mapress Stainless Steel flange PN 10/16, with plain end (gas)

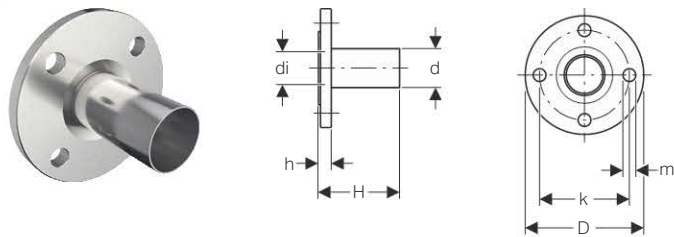

Application purposes

- For natural and liquefied gases
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Silicone-free (LABS-free)
- Design B1 (raised sealing strip with standard sealing strip), EN 1092-1

Technical data


Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, Ø [mm]	di, Ø [mm]	D [cm]	k [mm]	m [mm]	H [cm]	h [cm]	n [pc.]	PN [bar]	SU1 [pc.]	GBP/pc.
33748	50	54	51	16.5	125	18	11.3	1.8	4	10 / 16	1	166.79
33749	65	76.1	72	18.5	145	18	13.6	1.8	4	10 / 16	1	190.94
33750	80	88.9	84.8	20	160	18	15.2	2	8	10 / 16	1	223.52
33752	100	108	103.9	22	180	18	16.5	2	8	10 / 16	1	267.79

Accessories

- Geberit flange gasket PN 10/16 → p. 95
- Geberit bolt set for flange connection, made of CrNi steel → p. 96

Geberit Mapress Stainless Steel flanged stub with plain end, for loose flange PN 10/16 (gas)

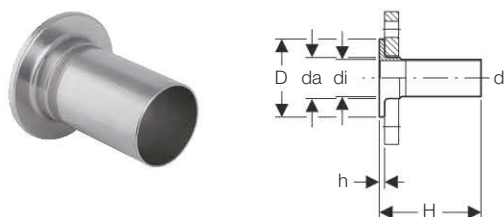

Application purposes

- For natural and liquefied gases
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Silicone-free (LABS-free)
- Suitable for loose flange, in accordance with EN 1092-1, flange type 02

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, Ø [mm]	da [mm]	di, Ø [mm]	D [cm]	H [cm]	h [cm]	PN [bar]	SU1 [pc.]	GBP/pc.
36141	20	22	27	19.6	5.8	13.5	0.6	10 / 16	1	56.42
36142	25	28	32	25.6	6.8	13.5	0.6	10 / 16	1	68.82
36143	32	35	40	32	7.8	13.5	0.6	10 / 16	1	99.41
36144	40	42	47	39	8.8	13.5	0.6	10 / 16	1	115.61
36145	50	54	59	51	10.2	13.5	0.8	10 / 16	1	143.14
36146	65	76.1	78	72.1	12.2	13.5	0.8	10 / 16	1	225.74
36147	80	88.9	91	84.9	13.8	13.5	1	10 / 16	1	264.27
36148	100	108	110	104	15.8	13.5	1	10 / 16	1	316.56

To order additionally

- Loose flange

Accessories

- Geberit flange gasket PN 10/16 → p. 95
- Geberit bolt set for flange connection, made of CrNi steel → p. 96

1.3.9 Sealings

Geberit Mapress Stainless Steel cap (gas)



Application purposes

- For natural and liquefied gases
- For permanent termination of pipe ends
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics


- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)					
Art. no.	DN	d, \varnothing [mm]	L [cm]	Z [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34462	12	15	2.3	0.3		1	9.37
34463	15	18	2.3	0.3		1	11.29
34464	20	22	2.4	0.3	5	1	11.79
34465	25	28	2.6	0.3		1	14.69
34466	32	35	2.9	0.3		1	20.55
34467	40	42	3.3	0.3		1	44.70
34468	50	54	3.8	0.3		1	49.19
34469	65	76.1	6	0.7		1	57.81
34470	80	88.9	6.7	0.7		1	64.20
34471	100	108	8.2	0.7		1	71.43

1.3.10 Connections

Geberit Mapress Stainless Steel elbow tap connector 90° (gas)



Application purposes

- For natural and liquefied gases
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics


- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Two fastening points
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	I [cm]	I1 [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
L1 / length: 4.3 cm											
34136	12	15	1/2	5	1.3	1.5	3			1	20.01
34137	15	18	1/2	5	1.3	1.5	3		5	1	21.60
L1 / length: 4.7 cm											
34139	20	22	1/2	5.4	1.7	1.6	2.9			1	28.09
L1 / length: 5.1 cm											
34138	20	22	3/4	5.4	1.7	1.6	3.3	25	5		30.92

Geberit Mapress Stainless Steel elbow tap connector 90°, offset, circular hole 50 mm (gas)



Application purposes

- For connecting one- and two-pipe gas metres
- For natural and liquefied gases
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Two fastening points for circular hole ø 50 mm
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Technical data


Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	I [cm]	I1 [cm]	Z [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
L1 / length: 5.1 cm										
91097	20	22	3/4	3.5	1.7	1.6	1.4		1	27.96
L1 / length: 5.8 cm										
91099	20 / 25	22	1	6.5	3	2.2	3.7	5	1	19.30
L1 / length: 6.1 cm										
91100	25	28	1	6.5	3	2.2	4	5	1	20.12
L1 / length: 6.5 cm										
91098	25 / 20	28	3/4	4.4	3	1.6	2.1	5	1	29.14

Accessories

- Geberit Mapress mounting bracket for gas metre → p. 51

Geberit Mapress Stainless Steel elbow tap connector 90°, offset, circular hole 50 mm, with plain end (gas)

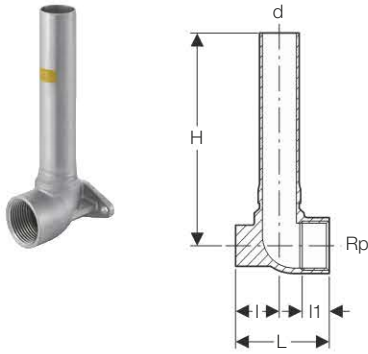

Application purposes

- For connecting one- and two-pipe gas metres
- For natural and liquefied gases
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Marked in yellow
- Two fastening points for circular hole \varnothing 50 mm

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------


Art. no.	DN	d, \varnothing [mm]	Rp [°]	H [cm]	L [cm]	l [cm]	l1 [cm]	SU1 [pc.]	GBP/pc.	
91102	PO	25	28	1	15	6.1	3	2.2	1	29.27

PO: Phase out as of April 2017

Accessories

- Geberit Mapress mounting bracket for gas metre → p. 51

Geberit Mapress mounting bracket for gas metre

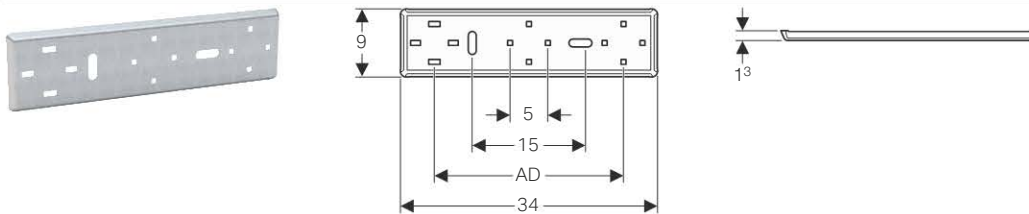

Application purposes

- For one- and two-pipe gas metres

Characteristics

- Connecting distance adjustable by ± 3 mm at the gas metre
- Zinc-plated
- Circular hole, \varnothing 50 mm

Technical data

Material	Steel
----------	-------

Scope of delivery


- Fastening material

Art. no.	AD [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
91096	25	10	1	16.78

1.4 Geberit Mapress Stainless Steel, silicone-free

1.4.1 System pipes 1.4401

Geberit Mapress Stainless Steel system pipe, CrNiMo, small bundle (silicone-free)



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Silicone-free (LABS-free)
- Pipe end with blue protection plug

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
Surface roughness	1.5 µm
Thermal expansion	0.0165 mm/(m · K)
Thermal conductivity, pipe	15 W/(m · K)

Art. no.	DN	d, ø [mm]	di, ø [mm]	s [mm]	L [m]	SU3 [m]	SU2 [m]	GBP/m
39202	12	15	13	1	6	120		7.31
39203	15	18	16	1	6	90		8.63
39204	20	22	19.6	1.2	6	60		11.67
39205	25	28	25.6	1.2	6	60		14.39
39206	32	35	32	1.5	6	30		21.19
39207	40	42	39	1.5	6	30		26.08
39208	50	54	51	1.5	6	30		33.17
39209	65	76.1	72.1	2	6		6	67.25
39210	80	88.9	84.9	2	6		6	76.61
39211	100	108	104	2	6		6	92.29

1.4.2 Couplings

Geberit Mapress Stainless Steel coupling (silicone-free)



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)						
----------	--------------------------------	--	--	--	--	--	--

Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
82002	12	15	4.8	0.8	10	1	5.45
82003	15	18	4.8	0.8	25	1	5.83
82004	20	22	5	0.8	25	1	6.82
82005	25	28	5.4	0.8	25	1	7.71
82006	32	35	6.2	1	10	1	9.56
82007	40	42	7.1	1.1	10	1	13.06
82008	50	54	8.3	1.3	25	1	15.66
82009	65	76.1	14.1	3.5		1	77.52
82010	80	88.9	16.2	4.2		1	88.58
82011	100	108	19.4	4.4		1	112.55

Geberit Mapress Stainless Steel slip coupling (silicone-free)



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black

Technical data


Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	E [cm]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
82102	12	15	2.5	8	3	1	9.02
82103	15	18	2.5	8	3	1	9.37
82104	20	22	2.5	8.4	3.4	1	10.70
82105	25	28	3	9.1	3.1	1	12.39
82106	32	35	3	10.2	4.2	1	13.85
82107	40	42	4	12	4	1	16.11
82108	50	54	4	14	6	1	20.56
82109	65	76.1	6	23	11	1	114.46
82110	80	88.9	7	26	12	1	129.22
82111	100	108	8	31	15	1	155.05

Art. no.	DN	d, ø [mm]	d1, ø [mm]	H [cm]	L [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
82303	15 / 12	18	15	3.5	5.5		1	6.42
82305	20 / 12	22	15	3.9	5.9		1	7.11
82306	20 / 15	22	18	3.7	5.7	5	1	7.11
82307	25 / 12	28	15	4.6	6.6		1	8.12
82308	25 / 15	28	18	4.4	6.4		1	8.12
82309	25 / 20	28	22	3.9	6	5	1	8.12
82310	32 / 12	35	15	5.5	7.5		1	12.77
82311	32 / 15	35	18	5.4	7.4		1	12.77
82312	32 / 20	35	22	5	7.1		1	12.77
82313	32 / 25	35	28	4.5	6.8		1	12.77
82314	40 / 12	42	15	6.1	8.1		1	23.20
82315	40 / 15	42	18	6	8		1	23.20
82316	40 / 20	42	22	6.1	8.2		1	23.20
82317	40 / 25	42	28	6	8.3		1	23.20
82318	40 / 32	42	35	5.1	7.7		1	23.20
82319	50 / 12	54	15	7.7	9.7		1	32.51
82320	50 / 15	54	18	7.6	9.6		1	32.51
82321	50 / 20	54	22	7.4	9.5		1	32.51
82322	50 / 25	54	28	8.7	11	5	1	32.51
82323	50 / 32	54	35	8	10.6		1	32.51
82324	50 / 40	54	42	6.2	9.2		1	32.51
82331	65 / 50	76.1	54	11.1	14.6		1	73.63
82338	80 / 50	88.9	54	12.8	16.3		1	79.36
82339	80 / 65	88.9	76.1	10.8	16.1		1	79.36
82345	100 / 50	108	54	13.7	17.2		1	83.57
82346	100 / 65	108	76.1	13.1	18.4		1	83.57
82348	100 / 80	108	88.9	14.3	20.3		1	83.57

1.4.3 Reducers

Geberit Mapress Stainless Steel reducer with plain end (silicone-free)



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

1.4.4 Bends

Geberit Mapress Stainless Steel bend (silicone-free)

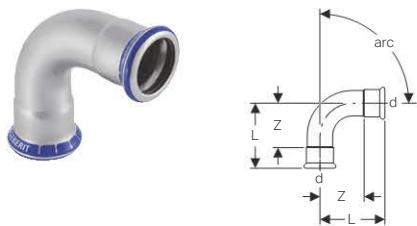

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black

Technical data


Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, Ø [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
arc / angle: 45°								
80602	12	15	3.6	1.6		5	1	8.80
80603	15	18	3.7	1.7		5	1	9.90
80604	20	22	4.2	2.1		5	1	12.03
80605	25	28	4.8	2.5	10		1	15.22
82606	32	35	4.3	1.7		5	1	21.45
82607	40	42	5.1	2.1			1	33.67
82608	50	54	6.2	2.7	10		1	46.43
82609	65	76.1	10.3	5			1	125.74
82610	80	88.9	11.7	5.7			1	150.91
82611	100	108	14.5	7			1	206.81
arc / angle: 90°								
80102	12	15	4.9	2.9	50		1	8.80
80103	15	18	5.3	3.3	50		1	9.90
80104	20	22	6.1	4	50		1	12.03
80105	25	28	7.2	4.9	50		1	15.22
81106	32	35	6.8	4.2	50		1	21.45
81107	40	42	8	5	15		1	33.67
81108	50	54	10	6.5	30		1	46.43
81109	65	76.1	15.9	10.6			1	125.74
81110	80	88.9	18.5	12.5			1	150.91
81111	100	108	23	15.5			1	206.81



- Bend 45° / 90° in the dimensions d76.1 / 88.9 / 108 with new masses as of 01.04.2017

Geberit Mapress Stainless Steel bend with plain end (silicone-free)

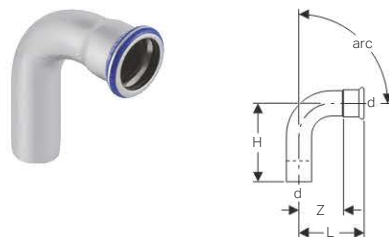

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------


Art. no.	DN	d, Ø [mm]	H [cm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
arc / angle: 45°									
80702	12	15	4.5	3.6	1.6		5	1	8.80
80703	15	18	4.2	3.7	1.7		5	1	9.90
80704	20	22	5.2	4.2	2.1		5	1	12.03
80705	25	28	5.6	4.8	2.5	10		1	15.22
82706	32	35	5.3	4.3	1.7		5	1	21.45
82707	40	42	6.1	5.1	2.1			1	33.67
82708	50	54	7.3	6.2	2.7		5	1	46.43
82709	65	76.1	11.1	10.3	5			1	125.74
82710	80	88.9	12.8	11.7	5.7			1	150.91
82711	100	108	15.8	14.5	7			1	206.81
arc / angle: 90°									
80302	12	15	5.9	4.9	2.9	10		1	8.80
80303	15	18	6.1	5.3	3.3	25		1	9.90
80304	20	22	7	6.1	4	25		1	12.03
80305	25	28	7.9	7.2	4.9	25		1	15.22
83306	32	35	7.7	6.8	4.2	10		1	21.45
83307	40	42	9	8	5		5	1	33.67
83308	50	54	11.1	10	6.5	25		1	46.43
83309	65	76.1	16.7	15.9	10.6			1	125.74
83310	80	88.9	19.5	18.5	12.5			1	150.91
83311	100	108	24.1	23	15.5			1	206.81



- Bend 45° / 90° in the dimensions d76.1 / 88.9 / 108 with new masses as of 01.04.2017

1.4.5 T-pieces

Geberit Mapress Stainless Steel T-piece, equal (silicone-free)



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, \varnothing [mm]	L [cm]	L1 [cm]	I [cm]	Z [cm]	Z1 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
81002	12	15	6.4	3.9	3.2	1.2	1.9	10		1	12.60
81003	15	18	6.8	4.1	3.4	1.4	2.1	10		1	14.36
81004	20	22	7.4	4.4	3.7	1.6	2.3	10		1	15.43
81005	25	28	8.4	5	4.2	1.9	2.7	10		1	18.13
81006	32	35	10	5.7	5	2.4	3.1	10		1	22.90
81007	40	42	11.4	6.5	5.7	2.7	3.5		5	1	32.52
81008	50	54	13.8	7.7	6.9	3.4	4.2	10		1	38.86
81009	65	76.1	23	11	11.5	6.2	5.7			1	214.01
81010	80	88.9	26	12.8	13	7	6.8			1	234.16
81011	100	108	31	15.3	15.5	8	7.8			1	289.02

Geberit Mapress Stainless Steel T-piece, reduced (silicone-free)



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	L [cm]	L1 [cm]	l [cm]	l2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
81204	15 / 12 / 15	18	15	18	6.8	4.1	3.4	3.4	1.4	2.1	1.4		1	13.00
81206	20 / 12 / 20	22	15	22	7.4	4.3	3.7	3.7	1.6	2.3	1.6	5	1	13.93
81207	20 / 15 / 20	22	18	22	7.4	4.3	3.7	3.7	1.6	2.3	1.6	5	1	13.93
81209	25 / 12 / 25	28	15	28	8.4	4.6	4.2	4.2	1.9	2.6	1.9		1	16.82
81210	25 / 15 / 25	28	18	28	8.4	4.6	4.2	4.2	1.9	2.6	1.9	5	1	16.82
81211	25 / 20 / 25	28	22	28	8.4	4.7	4.2	4.2	1.9	2.6	1.9		1	16.82
81212	32 / 12 / 32	35	15	35	10	4.9	5	5	2.4	2.9	2.4		1	20.53
81213	32 / 15 / 32	35	18	35	10	4.9	5	5	2.4	2.9	2.4		1	20.88
81214	32 / 20 / 32	35	22	35	10	5	5	5	2.4	2.9	2.4		1	20.88
81215	32 / 25 / 32	35	28	35	10	5.3	5	5	2.4	3	2.4		1	20.88
81216	40 / 12 / 40	42	15	42	11.4	5.3	5.7	5.7	2.7	3.3	2.7		1	30.17
81217	40 / 15 / 40	42	18	42	11.4	5.3	5.7	5.7	2.7	3.3	2.7		1	30.17
81218	40 / 20 / 40	42	22	42	11.4	5.4	5.7	5.7	2.7	3.3	2.7		1	30.17
81219	40 / 25 / 40	42	28	42	11.4	5.7	5.7	5.7	2.7	3.4	2.7	5	1	30.17
81220	40 / 32 / 40	42	35	42	11.4	6.1	5.7	5.7	2.7	3.5	2.7		1	30.17
81221	50 / 12 / 50	54	15	54	13.8	5.9	6.9	6.9	3.4	3.9	3.4		1	34.82
81222	50 / 15 / 50	54	18	54	13.8	5.9	6.9	6.9	3.4	3.9	3.4		1	34.82
81223	50 / 20 / 50	54	22	54	13.8	6	6.9	6.9	3.4	3.9	3.4		1	34.82
81224	50 / 25 / 50	54	28	54	13.8	6.3	6.9	6.9	3.4	4	3.4		1	34.82
81225	50 / 32 / 50	54	35	54	13.8	6.7	6.9	6.9	3.4	4.1	3.4		1	34.82
81226	50 / 40 / 50	54	42	54	13.8	7.1	6.9	6.9	3.4	4.1	3.4		1	34.82
81229	65 / 20 / 65	76.1	22	76.1	23	7.7	11.5	11.5	6.2	5.6	6.2		1	181.10
81230	65 / 25 / 65	76.1	28	76.1	23	7.9	11.5	11.5	6.2	5.6	6.2		1	181.10
81231	65 / 32 / 65	76.1	35	76.1	23	8.1	11.5	11.5	6.2	5.5	6.2		1	181.10
81232	65 / 40 / 65	76.1	42	76.1	23	8.1	11.5	11.5	6.2	5.1	6.2		1	181.10
81233	65 / 50 / 65	76.1	54	76.1	23	8.7	11.5	11.5	6.2	5.2	6.2		1	181.10
81236	80 / 20 / 80	88.9	22	88.9	26	8.5	13	13	7	6.4	7		1	197.33
81237	80 / 25 / 80	88.9	28	88.9	26	8.7	13	13	7	6.4	7		1	197.33
81238	80 / 32 / 80	88.9	35	88.9	26	9	13	13	7	6.4	7		1	197.33
81239	80 / 40 / 80	88.9	42	88.9	26	9.2	13	13	7	6.2	7		1	197.33
81240	80 / 50 / 80	88.9	54	88.9	26	9.3	13	13	7	5.8	7		1	197.33
81241	80 / 65 / 80	88.9	76.1	88.9	26	11.4	13	13	7	6.1	7		1	197.33
81244	100 / 20 / 100	108	22	108	31	10.3	15.5	15.5	8	8.2	8		1	232.17
81245	100 / 25 / 100	108	28	108	31	10.5	15.5	15.5	8	8.2	8		1	232.17
81246	100 / 32 / 100	108	35	108	31	10.8	15.5	15.5	8	8.2	8		1	232.17
81247	100 / 40 / 100	108	42	108	31	11	15.5	15.5	8	8	8		1	232.17
81248	100 / 50 / 100	108	54	108	31	11.3	15.5	15.5	8	7.8	8		1	232.17
81249	100 / 65 / 100	108	76.1	108	31	12.4	15.5	15.5	8	7.1	8		1	232.17
81250	100 / 80 / 100	108	88.9	108	31	13.5	15.5	15.5	8	7.5	8		1	232.17

Geberit Mapress Stainless Steel T-piece with male thread (silicone-free)



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	R [°]	d1, ø [mm]	H [cm]	L [cm]	l [cm]	l1 [cm]	Z [cm]	Z1 [cm]	SU1 [pc.]	GBP/pc.
81454	12	15	1/2	15	3.4	6.4	3.2	3.2	1.2	1.2	1	13.93
81455	15	18	1/2	18	3.6	6.8	3.4	3.4	1.4	1.4	1	13.93
81458	20	22	3/4	22	4.2	7.4	3.7	3.7	1.6	1.6	1	16.23
81461	25	28	1	28	4.8	8.4	4.2	4.2	1.9	1.9	1	18.55

Geberit Mapress Stainless Steel T-piece with female thread (silicone-free)



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black


Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	Rp [°]	d1, ø [mm]	L [cm]	L1 [cm]	l [cm]	l2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
81304	12 / 15 / 12	15	1/2	15	6.4	4	3.2	3.2	1.2	2.7	1.2			1	13.93
81305	15	18	1/2	18	6.8	4.2	3.4	3.4	1.4	2.9	1.4			1	13.93
81306	15 / 20 / 15	18	3/4	18	6.8	4.4	3.4	3.4	1.4	2.9	1.4			1	13.93
81307	20 / 15 / 20	22	1/2	22	7.4	4.3	3.7	3.7	1.6	3	1.6		5	1	16.23
81308	20	22	3/4	22	7.4	4.6	3.7	3.7	1.6	3.1	1.6			1	16.23
81309	25 / 15 / 25	28	1/2	28	8.4	4.6	4.2	4.2	1.9	3.3	1.9	10		1	18.55
81310	25 / 20 / 25	28	3/4	28	8.4	4.9	4.2	4.2	1.9	3.4	1.9		5	1	18.55
81311	25	28	1	28	8.4	5.3	4.2	4.2	1.9	3.6	1.9			1	18.55
81312	32 / 15 / 32	35	1/2	35	10	5	5	5	2.4	3.7	2.4		5	1	22.05
81313	32 / 20 / 32	35	3/4	35	10	5.3	5	5	2.4	3.8	2.4			1	22.05
81316	40 / 15 / 40	42	1/2	42	11.4	5.3	5.7	5.7	2.7	4	2.7			1	24.95
81317	40 / 20 / 40	42	3/4	42	11.4	5.6	5.7	5.7	2.7	4.1	2.7			1	24.95
81320	50 / 15 / 50	54	1/2	54	13.8	5.9	6.9	6.9	3.4	4.6	3.4	10		1	31.33
81321	50 / 20 / 50	54	3/4	54	13.8	6.2	6.9	6.9	3.4	4.7	3.4			1	31.33
81324	50	54	2	54	13.8	7.9	6.9	6.9	3.4	5.6	3.4			1	31.33
81326	65 / 20 / 65	76.1	3/4	76.1	23	7.9	11.5	11.5	6.2	6.4	6.2			1	185.74
81331	80 / 20 / 80	88.9	3/4	88.9	26	8.8	13	13	7	7.3	7			1	197.33
81334	80 / 50 / 80	88.9	2	88.9	26	9.6	13	13	7	7.3	7			1	197.33
81336	100 / 20 / 100	108	3/4	108	31	10.5	15.5	15.5	8	9	8			1	232.17
81339	100 / 50 / 100	108	2	108	31	11.5	15.5	15.5	8	9.2	8			1	232.17

1.4.6 Adaptors, permanent

Geberit Mapress Stainless Steel adaptor with male thread (silicone-free)



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	R ["]	H [cm]	L [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
81726	12	15	3/8	1.8	3.8			1	10.43
81703	12 / 15	15	1/2	2.1	4.1	10		1	10.43
81714	12 / 20	15	3/4	2.3	4.3			1	10.43
81704	15	18	1/2	2.2	4.2	25		1	11.59
81705	15 / 20	18	3/4	2.4	4.4			1	11.59
81715	20 / 15	22	1/2	2.1	4.2		5	1	12.77
81707	20	22	3/4	2.3	4.4	25		1	12.77
81716	20 / 25	22	1	2.5	4.6			1	12.77
81717	25 / 20	28	3/4	2.3	4.6		5	1	16.23
81708	25	28	1	2.3	4.8	25		1	16.23
81718	25 / 32	28	1 1/4	2.5	4.8			1	16.23
81719	32 / 25	35	1	2.5	5.1			1	23.20
81709	32	35	1 1/4	2.7	5.3	10		1	23.20
81720	32 / 40	35	1 1/2	2.7	5.3			1	23.20
81721	40 / 32	42	1 1/4	2.7	5.7			1	34.35
81710	40	42	1 1/2	2.7	5.7	10		1	34.35
81722	50 / 40	54	1 1/2	4.8	8.3			1	46.43
81711	50	54	2	5.4	8.9	25		1	46.43
81713	65	76.1	2 1/2	7	12.3			1	211.05
81724	80	88.9	3	7.7	13.7			1	316.70

Geberit Mapress Stainless Steel adaptor with female thread (silicone-free)



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
81802	12 / 15	15	1/2	3.7	0.4		5	1	10.43
81823	12 / 20	15	3/4	3.8	0.3			1	10.43
81803	15	18	1/2	3.7	0.4	10		1	11.59
81804	15 / 20	18	3/4	3.8	0.3			1	11.59
81805	20 / 15	22	1/2	3.6	0.2		5	1	12.77
81806	20	22	3/4	3.9	0.3		5	1	12.77
81824	20 / 25	22	1	4.2	0.4			1	12.77
81807	25 / 15	28	1/2	3.8	0.2		5	1	16.23
81819	25 / 20	28	3/4	3.9	0.3		5	1	16.23
81809	25	28	1	4.4	0.4	10		1	16.23
81825	25 / 32	28	1 1/4	4.6	0.4			1	16.23
81820	32 / 25	35	1	4.5	0.2			1	23.20
81811	32	35	1 1/4	4.9	0.4			1	23.20
81826	32 / 40	35	1 1/2	4.9	0.4			1	23.20
81821	40 / 32	42	1 1/4	5.1	0.2			1	34.35
81814	40	42	1 1/2	5.3	0.4		5	1	34.35
81822	50 / 40	54	1 1/2	7.1	2.2			1	46.43
81818	50	54	2	6.2	0.4		5	1	46.43

Geberit Mapress Stainless Steel elbow adaptor 90° with male thread (silicone-free)



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black

Technical data


Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	R ["]	H [cm]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
83833	12 / 15	15	1/2	3.7	5.7	3.7	1	15.09
83834	15	18	1/2	3.9	5.7	3.7	1	16.23
83835	20	22	3/4	4.6	6	3.9	1	20.88
83836	25	28	1	5.4	6.7	4.4	1	26.70
83837	32	35	1 1/4	6.3	7.5	4.9	1	37.15
83838	40	42	1 1/2	6.7	8.3	5.3	1	65.31
83839	50	54	2	7.8	9.4	5.9	1	83.25

Geberit Mapress Stainless Steel

Geberit Mapress Stainless Steel, silicone-free
Adaptors and connections, detachable

Geberit Mapress Stainless Steel elbow adaptor 90° with female thread (silicone-free)



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black


Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, Ø [mm]	Rp ["]	L [cm]	L1 [cm]	Z [cm]	Z1 [cm]	SU1 [pc.]	GBP/pc.
83803	12 / 15	15	1/2	5.7	3.7	3.7	2.4	1	14.88
83804	15	18	1/2	5.7	3.9	3.7	2.6	1	18.16
83805	20	22	3/4	6	4.6	3.9	3.1	1	20.88
83806	25	28	1	6.7	5.4	4.3	3.7	1	26.70
83807	32	35	1 1/4	7.5	6.3	4.9	4.4	1	37.15

1.4.7 Adaptors and connections, detachable

Geberit Mapress Stainless Steel union (silicone-free)



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics


- Pressing indicator
- Leaky if unpressed
- Union nut made of brass
- Seal ring made of CIIR, black
- Flat gasket made of EPDM

Technical data

Media temperature with flat gasket EPDM	0–100 °C
Material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, Ø [mm]	G ["]	L [cm]	Z [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
85320	12	15	3/4	6.6	2.6		1	35.69
85321	15	18	3/4	6.9	2.9		1	40.49
85322	20	22	1	7.2	3		1	50.16
85323	25	28	1 1/4	7.7	3.1		1	77.04
85324	32	35	1 1/2	8.2	3		1	80.80
85325	40	42	1 3/4	9.5	3.5		1	116.42
85326	50	54	2 3/8	11.3	4.3	5	1	193.33

Geberit Mapress Stainless Steel adaptor union with male thread (silicone-free)



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics


- Pressing indicator
- Leaky if unpressed
- Union nut made of brass
- Seal ring made of CIIR, black
- Flat gasket made of EPDM

Technical data

Media temperature with flat gasket EPDM	0–100 °C
Material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, ø [mm]	R ["]	G ["]	H [cm]	L [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
85330	12 / 15	15	1/2	3/4	4.4	6.4		5	1	18.55
85332	15	18	1/2	3/4	4.4	6.4	10		1	20.06
85333	15 / 20	18	3/4	3/4	4.6	6.6			1	20.06
85334	20 / 15	22	1/2	1	4.6	6.7			1	20.88
85335	20	22	3/4	1	4.7	6.8	10		1	20.88
85337	25	28	1	1 1/4	5.5	7.8		5	1	34.82
85338	32	35	1 1/4	1 1/2	5.9	8.5	10		1	45.27
85339	40	42	1 1/2	1 3/4	6	9	10		1	52.12
85340	50	54	2	2 3/8	6.8	10.3	10		1	90.53

Geberit Mapress Stainless Steel adaptor union with male thread, union nut made of CrNi steel (silicone-free)



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Flat gasket made of EPDM

Technical data


Media temperature with flat gasket EPDM	0–100 °C
Material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, ø [mm]	R ["]	G ["]	H [cm]	L [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
85360	12 / 15	15	1/2	3/4	4.4	6.4		1	24.36
85362	15	18	1/2	3/4	4.4	6.4		1	27.86
85365	20	22	3/4	1	4.7	6.8		1	29.01
85367	25	28	1	1 1/4	5.5	7.8	5	1	44.10
85368	32	35	1 1/4	1 1/2	5.9	8.5		1	58.95
85369	40	42	1 1/2	1 3/4	6	9		1	68.20
85370	50	54	2	2 3/8	6.8	10.3		1	117.86

Geberit Mapress Stainless Steel

Geberit Mapress Stainless Steel, silicone-free
Adaptors and connections, detachable

Geberit Mapress Stainless Steel adaptor union with male thread and plain end (silicone-free)



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics


- Silicone-free (LABS-free)
- Union nut made of brass
- Flat gasket made of EPDM

Technical data

Media temperature with flat gasket EPDM	0–100 °C
Material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, Ø [mm]	R ["]	G ["]	H [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
35400	12	15	1/2	3/4	8.6		1	23.20
35402	15	18	1/2	3/4	8.6		1	26.52
35405	20	22	3/4	1	9.2		1	27.62
35407	25	28	1	1 1/4	10.1	5	1	41.99
35408	32	35	1 1/4	1 1/2	10.9		1	56.14
35409	40	42	1 1/2	1 3/4	11.5		1	64.95
35410	50	54	2	2 3/8	12.9		1	112.25

Geberit Mapress Stainless Steel adaptor union with female thread (silicone-free)



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics


- Pressing indicator
- Leaky if unpressed
- Union nut made of brass
- Seal ring made of CIIR, black
- Flat gasket made of EPDM

Technical data

Media temperature with flat gasket EPDM	0–100 °C
Material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, Ø [mm]	Rp ["]	G ["]	L [cm]	Z [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
85300	12 / 15	15	1/2	3/4	5.9	2.6		1	18.55
85301	12 / 20	15	3/4	3/4	6.1	2.6		1	18.55
85302	15	18	1/2	3/4	5.9	2.6		1	20.06
85303	15 / 20	18	3/4	3/4	6.1	2.6		1	20.06
85304	20	22	3/4	1	6.3	2.7		1	20.88
85305	20 / 25	22	1	1	6.6	2.8		1	20.88
85306	25	28	1	1 1/4	7.1	3.1	5	1	34.82
85307	32	35	1 1/4	1 1/2	7.7	3.2		1	45.27
85308	40	42	1 1/2	1 3/4	8.2	3.3		1	52.12
85309	50	54	2	2 3/8	9.5	3.7		1	90.53

Geberit Mapress Stainless Steel adaptor union with female thread, union nut made of CrNi steel (silicone-free)



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Flat gasket made of EPDM

Technical data

Media temperature with flat gasket EPDM	0–100 °C
Material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, ø [mm]	Rp ["]	G ["]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
85350	12 / 15	15	1/2	3/4	5.9	2.6	1	24.36
85351	15	18	1/2	3/4	5.9	2.6	1	27.86
85358	15 / 20	18	3/4	3/4	6.1	2.6	1	27.86
85352	20	22	3/4	1	6.3	2.7	1	29.01
85359	20 / 25	22	1	1	6.6	2.8	1	29.01
85353	25	28	1	1 1/4	7.1	3.1	1	44.10
85354	32	35	1 1/4	1 1/2	7.7	3.2	1	58.95
85355	40	42	1 1/2	1 3/4	8.2	3.3	1	68.20
85356	50	54	2	2 3/8	9.5	3.7	1	117.86

Geberit Mapress Stainless Steel adaptor union with female thread and plain end (silicone-free)



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Silicone-free (LABS-free)
- Union nut made of brass
- Flat gasket made of EPDM

Technical data


Media temperature with flat gasket EPDM	0–100 °C
Material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, ø [mm]	Rp ["]	G ["]	H [cm]	L [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
35380	12	15	1/2	3/4	5.9	8.1		1	23.20
35382	15	18	1/2	3/4	5.9	8.1		1	26.52
35384	20	22	3/4	1	6.4	8.7		1	27.62
35386	25	28	1	1 1/4	6.7	9.4		1	41.99
35387	32	35	1 1/4	1 1/2	7.2	10.1		1	56.14
35388	40	42	1 1/2	1 3/4	7.7	10.7	5	1	64.95
35389	50	54	2	2 3/8	8.4	12		1	112.25

Geberit Mapress Stainless Steel

Geberit Mapress Stainless Steel, silicone-free
Adaptors and connections, detachable

Geberit Mapress Stainless Steel adaptor with union nut (silicone-free)



Application purposes

- Suitable exclusively for threads with an inner diameter of $\leq di$
- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics


- Pressing indicator
- Leaky if unpressed
- Union nut made of brass
- Seal ring made of CIIR, black
- Flat gasket made of EPDM

Technical data

Media temperature with flat gasket EPDM	0–100 °C
Material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, \emptyset [mm]	G ["]	di, \emptyset [mm]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
85042	12	15	1/2	10	5.1	2.5	1	16.23
85032	12	15	3/4	13	3.7	1.1	1	12.77
85072	12	15	1 1/4	26	4.3	1.3	1	12.77
85033	15	18	3/4	13	3.7	1.1	1	13.32
85034	20	22	1	20	4	1.1	1	18.55
85044	20	22	1 1/4	26	4.3	1.3	1	18.55
85045	20	22	1 1/2	32	4.4	1.3	1	18.55
85046	25	28	1	20	5.5	2.4	1	24.36
85035	25	28	1 1/4	26	4.4	1.3	1	24.36
85047	25	28	1 1/2	32	4.6	1.3	1	24.36
85036	32	35	1 1/2	32	4.8	1.3	1	26.70
85037	40	42	1 3/4	39	5.2	1.3	1	35.55
85038	50	54	2 3/8	51	5.8	1.5	1	47.97

Geberit Mapress Stainless Steel adaptor with union nut made of CrNi steel (silicone-free)



Application purposes

- Suitable exclusively for threads with an inner diameter of $\leq di$
- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Flat gasket made of EPDM

Technical data

Media temperature with flat gasket EPDM	0–100 °C
Material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, \emptyset [mm]	G ["]	di, \emptyset [mm]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
85132	12	15	3/4	13	3.7	1.1	1	16.45
85134	20	22	1	20	4	1.1	1	20.55
85075	25	28	1 1/2	32	4.8	1.3	1	46.88

Geberit Mapress Stainless Steel flange PN 10/16, with pressing socket (silicone-free)

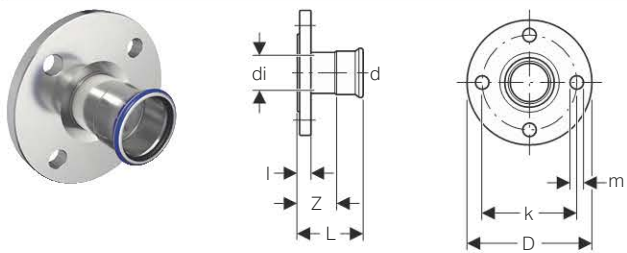

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Design B1 (raised sealing strip with standard sealing strip), EN 1092-1

Technical data


Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	di, ø [mm]	D [cm]	k [mm]	m [mm]	L [cm]	l [cm]	Z [cm]	n [pc.]	PN [bar]	SU1 [pc.]	GBP/pc.
83712	15 / 12	15	15	9.5	65	14	6.1	1.6	4.1	4	10 / 16	1	42.35
83713	15	18	15	9.5	65	14	6.2	1.6	4.2	4	10 / 16	1	43.54
83714	20	22	19	10.5	75	14	6.5	1.8	4.4	4	10 / 16	1	51.47
83715	25	28	25	11.5	85	14	6.9	1.8	4.6	4	10 / 16	1	62.94
83716	32	35	32	14	100	18	7.2	1.8	4.6	4	10 / 16	1	88.87
83717	40	42	39	15	110	18	7.9	1.8	4.9	4	10 / 16	1	104.27
83718	50	54	51	16.5	125	18	8.7	1.8	5.2	4	10 / 16	1	128.57
83719	65	76.1	72	18.5	145	18	11.8	1.8	6.5	4	10 / 16	1	203.13
83720	80	88.9	84.8	20	160	18	12.5	2	6.5	8	10 / 16	1	241.40
83721	100	108	103.9	22	180	18	13	2	5.5	8	10 / 16	1	286.53

Accessories

- Geberit flange gasket PN 10/16 → p. 95
- Geberit bolt set for flange connection, made of CrNi steel → p. 96

Geberit Mapress Stainless Steel flange PN 10/16, with plain end (silicone-free)

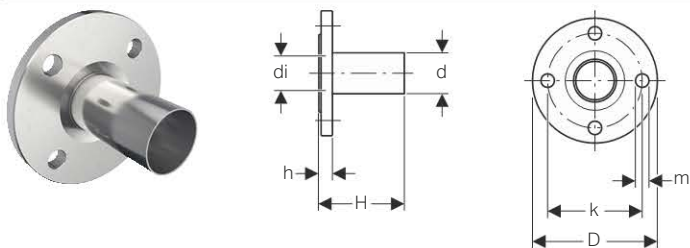

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Silicone-free (LABS-free)
- Design B1 (raised sealing strip with standard sealing strip), EN 1092-1

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	di, ø [mm]	D [cm]	k [mm]	m [mm]	H [cm]	h [cm]	n [pc.]	PN [bar]	SU1 [pc.]	GBP/pc.
33748	50	54	51	16.5	125	18	11.3	1.8	4	10 / 16	1	166.79
33749	65	76.1	72	18.5	145	18	13.6	1.8	4	10 / 16	1	190.94
33750	80	88.9	84.8	20	160	18	15.2	2	8	10 / 16	1	223.52
33752	100	108	103.9	22	180	18	16.5	2	8	10 / 16	1	267.79


Accessories

- Geberit flange gasket PN 10/16 → p. 95
- Geberit bolt set for flange connection, made of CrNi steel → p. 96

Geberit Mapress Stainless Steel

Geberit Mapress Stainless Steel, silicone-free
Adaptors and connections, detachable

Geberit Mapress Stainless Steel flanged stub with plain end, for loose flange PN 6 (silicone-free)



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Silicone-free (LABS-free)
- Suitable for loose flange, in accordance with EN 1092-1, flange type 02

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, \emptyset [mm]	da [mm]	di, \emptyset [mm]	D [cm]	H [cm]	h [cm]	PN [bar]	SU1 [pc.]	GBP/pc.
36150	25	28	32	25.6	6	13.5	0.6	6	1	60.67
36151	32	35	40	32	7	13.5	0.6	6	1	87.35
36152	40	42	47	39	8	13.5	0.6	6	1	101.93
36153	50	54	59	51	9	13.5	0.8	6	1	126.19
36154	65	76.1	78	73.1	11	13.5	0.8	6	1	198.98
36155	80	88.9	91	84.9	12.8	13.5	1	6	1	232.97
36156	100	108	110	104	14.8	13.5	1	6	1	279.09


To order additionally

- Loose flange

Accessories

- Geberit flange gasket PN 6 → p. 95
- Geberit bolt set for flange connection, made of CrNi steel → p. 96

Geberit Mapress Stainless Steel flanged stub with plain end, for loose flange PN 10/16 (silicone-free)



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Silicone-free (LABS-free)
- Suitable for loose flange, in accordance with EN 1092-1, flange type 02

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, \emptyset [mm]	da [mm]	di, \emptyset [mm]	D [cm]	H [cm]	h [cm]	PN [bar]	SU1 [pc.]	GBP/pc.
36141	20	22	27	19.6	5.8	13.5	0.6	10 / 16	1	56.42
36142	25	28	32	25.6	6.8	13.5	0.6	10 / 16	1	68.82
36143	32	35	40	32	7.8	13.5	0.6	10 / 16	1	99.41
36144	40	42	47	39	8.8	13.5	0.6	10 / 16	1	115.61
36145	50	54	59	51	10.2	13.5	0.8	10 / 16	1	143.14
36146	65	76.1	78	72.1	12.2	13.5	0.8	10 / 16	1	225.74
36147	80	88.9	91	84.9	13.8	13.5	1	10 / 16	1	264.27
36148	100	108	110	104	15.8	13.5	1	10 / 16	1	316.56

To order additionally

- Loose flange

Accessories

- Geberit flange gasket PN 10/16 → p. 95
- Geberit bolt set for flange connection, made of CrNi steel → p. 96

1.4.8 Sealings

Geberit Mapress Stainless Steel cap (silicone-free)



Application purposes

- For technical building systems, industry and shipbuilding
- For permanent termination of pipe ends
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)							
Art. no.	DN	d, \emptyset [mm]	L [cm]	Z [cm]				SU1 [pc.]	GBP/pc.
83212	12	15	2.3	0.3				1	9.13
83213	15	18	2.3	0.3				1	10.96
83214	20	22	2.4	0.3				1	11.82
83215	25	28	2.6	0.3				1	14.25
83216	32	35	2.9	0.3				1	19.91
83217	40	42	3.3	0.3				1	43.34
83218	50	54	3.8	0.3				1	47.68

1.4.9 Connections

Geberit Mapress Stainless Steel elbow tap connector 90° (silicone-free)

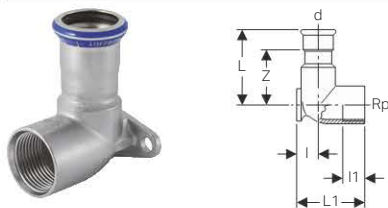

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Leaky if unpressed
- Two fastening points
- Seal ring made of CIIR, black


Technical data

Material		CrNiMo steel 1.4401 (EN 10088)								
Art. no.	DN	d, \emptyset [mm]	Rp ["]	L [cm]	l [cm]	l1 [cm]	Z [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
L1 / length: 4.3 cm										
83403	12 / 15	15	1/2	5	1.3	1.5	3	5	1	17.91
83405	15	18	1/2	5	1.3	1.5	3		1	19.33
L1 / length: 5.1 cm										
83407	20	22	3/4	5.4	1.7	1.6	3.3		1	27.74

Geberit Mapress Stainless Steel

Geberit Mapress Stainless Steel, silicone-free Compensators

Geberit Mapress Stainless Steel T-elbow tap connector 90°, offset (silicone-free)



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Leaky if unpressed
- Two fastening points
- Seal ring made of CIIR, black


Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	I [cm]	I1 [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
L1 / length: 6.5 cm									
83423	12 / 15	15	1/2	5	3.5	1.5	3	1	17.77
83425	15	18	1/2	5	3.5	1.5	3	1	19.16
83427	20	22	3/4	5.4	3.1	1.6	3.3	1	27.50

1.4.10 Compensators

Geberit Mapress Stainless Steel axial expansion fitting with pressing sockets (silicone-free)

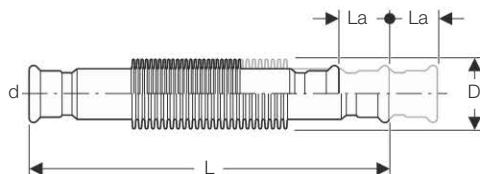

Application purposes

- For cold and hot potable water
- For heating water
- For cooling water without antifreeze agent
- For cooling water with antifreeze agent
- For remote network heating water ≤ 120 °C
- For service water
- For treated water
- For rainwater with a pH value of > 6.0
- For grey and black water with pH value > 6.0
- For technical building systems, industry and shipbuilding
- Exclusively for absorption of axial linear expansion during operation

Characteristics

- Pressing indicator
- Silicone-free (LABS-free)
- Leaky if unpressed
- Bellows made of stainless steel
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug


Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	D [cm]	La [cm]	L [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
33932	12	15	2.6	+/- 0.7	15.1		1	89.06
33933	15	18	2.6	+/- 0.7	14.7		1	94.06
33934	20	22	3.1	+/- 1.1	10.6		1	108.62
33935	25	28	3.9	+/- 1.3	12		1	117.31
33936	32	35	4.6	+/- 1.3	13.9	5	1	131.87
33937	40	42	5.9	+/- 1.3	14.9		1	236.89
33938	50	54	7	+/- 1.8	17.6		1	269.90
33939	65	76.1	8.8	+/- 2.2	26.2		1	335.45
33940	80	88.9	11.7	+/- 2.3	28.6		1	377.19
33941	100	108	14.4	+/- 2.3	54.2		1	766.28

1.4.11 Feed-throughs

Geberit Mapress Stainless Steel bulkhead and deck passing with two plain ends (silicone-free)



Application purposes

- For industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Silicone-free (LABS-free)
- Protective tube for welding
- Protective tube made of steel 1.0039, coated


Technical data

Material		CrNiMo steel 1.4401 (EN 10088)						
Art. no.	DN	d, \emptyset [mm]	D [cm]	L [cm]	I [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
90980	12	15	2.5	45	16.5	5	1	46.45
90981	15	18	3	45	16.5		1	47.59
90982	20	22	3.4	45	16.5	5	1	49.92
90983	25	28	3.8	45	16.5	5	1	54.57
90984	32	35	4.5	45	16.5	5	1	66.17
90985	40	42	5.4	45	16.5	5	1	78.95
90986	50	54	7	45	16.5	5	1	87.08
90987	65	76.1	8.9	45	16.5		1	197.35
90988	80	88.9	10.8	45	16.5		1	220.59
90989	100	108	13.3	45	16.5		1	243.80

1.5 Geberit Mapress Stainless Steel, FKM, blue

1.5.1 System pipes 1.4401

Geberit Mapress Stainless Steel system pipe, CrNiMo, small bundle (FKM, blue)

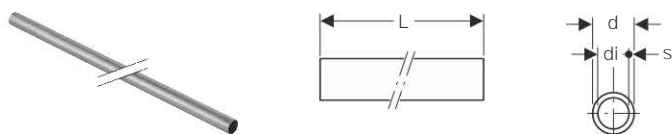

Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Silicone-free (LABS-free)
- Pipe end with blue protection plug


Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
Surface roughness	1.5 µm
Thermal expansion	0.0165 mm/(m · K)
Thermal conductivity, pipe	15 W/(m · K)

Art. no.	DN	d, ø [mm]	di, ø [mm]	s [mm]	L [m]	SU3 [m]	SU2 [m]	GBP/m
39202	12	15	13	1	6	120		7.31
39203	15	18	16	1	6	90		8.63
39204	20	22	19.6	1.2	6	60		11.67
39205	25	28	25.6	1.2	6	60		14.39
39206	32	35	32	1.5	6	30		21.19
39207	40	42	39	1.5	6	30		26.08
39208	50	54	51	1.5	6	30		33.17
39209	65	76.1	72.1	2	6		6	67.25
39210	80	88.9	84.9	2	6		6	76.61
39211	100	108	104	2	6		6	92.29

1.5.2 System pipes 1.4301

Geberit Mapress Stainless Steel system pipe, CrNi, small bundle (FKM, blue)

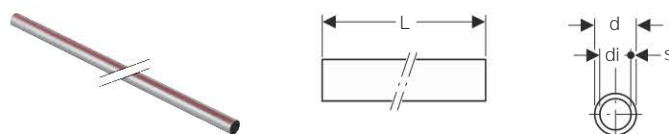

Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10


Technical data

Material	CrNi steel 1.4301 (EN 10088)
Surface roughness	1.5 µm
Thermal expansion	0.016 mm/(m · K)
Thermal conductivity, pipe	15 W/(m · K)

Art. no.	DN	d, ø [mm]	di, ø [mm]	s [mm]	L [m]	SU3 [m]	SU2 [m]	GBP/m
39602	12	15	13	1	6	120		6.19
39603	15	18	16	1	6	90		7.34
39604	20	22	19.6	1.2	6	60		9.88
39605	25	28	25.6	1.2	6	60		12.18
39606	32	35	32	1.5	6	30		18.17
39607	40	42	39	1.5	6	30		22.27
39608	50	54	51	1.5	6	30		28.13
39109	65	76.1	73.1	1.5	6		6	37.34
39110	80	88.9	85.9	1.5	6		6	42.75
39111	100	108	104	2	6		6	51.41

1.5.3 Pipe nipples

Geberit Mapress Stainless Steel pipe nipple (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10


Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	di, ø [mm]	s [mm]	L [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
32050	12	15	13	1	5		1	2.65
32051	15	18	16	1	5	5	1	2.87
32052	20	22	19.6	1.2	5.2	5	1	3.07
32053	25	28	25.6	1.2	5.6	5	1	3.91
32054	32	35	32	1.5	6.2		1	5.02
32055	40	42	39	1.5	8		1	7.11
32056	50	54	51	1.5	9		1	9.23
32057	65	76.1	72.1	2	13.6		1	38.02
32058	80	88.9	84.9	2	15		1	44.33
32059	100	108	104	2	18		1	62.04

Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
50062	12	15	4.8	0.8	1	7.07
50063	15	18	4.8	0.8	1	7.91
50064	20	22	5	0.8	1	9.48
50065	25	28	5.4	0.8	1	10.80
50066	32	35	6.2	1	1	13.46
50067	40	42	7.1	1.1	1	18.75
50068	50	54	8.3	1.3	1	24.98
50071	65	76.1	14.1	3.5	1	102.03
50072	80	88.9	16.2	4.2	1	116.90
50073	100	108	19.4	4.4	1	168.09

Geberit Mapress Stainless Steel slip coupling (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Silicone-free (LABS-free)
- Seal ring made of FKM, blue
- Pressing socket with black protection plug


Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	E [cm]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
50082	12	15	2.5	8	3	1	10.71
50083	15	18	2.5	8	3	1	11.43
50084	20	22	2.5	8.4	3.4	1	13.38
50085	25	28	3	9.1	3.1	1	15.47
50086	32	35	3	10.2	4.2	1	17.79
50087	40	42	4	12	4	1	21.77
50088	50	54	4	14	6	1	29.76
50091	65	76.1	6	23	11	1	138.31
50092	80	88.9	7	26	12	1	157.29
50093	100	108	8	31	15	1	210.55

1.5.4 Couplings

Geberit Mapress Stainless Steel coupling (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Silicone-free (LABS-free)
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

1.5.5 Reducers

Geberit Mapress Stainless Steel reducer with plain end (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Silicone-free (LABS-free)
- Seal ring made of FKM, blue
- Pressing socket with black protection plug


Technical data

Material	CrNiMo steel 1.4401 (EN 10088)						
Art. no.	DN	d, ø [mm]	d1, ø [mm]	H [cm]	L [cm]	SU1 [pc.]	GBP/pc.
50133	15 / 12	18	15	3.5	5.5	1	7.10
50134	20 / 12	22	15	3.9	5.9	1	7.65
50135	20 / 15	22	18	3.7	5.7	1	7.65
50136	25 / 12	28	15	4.6	6.6	1	8.90
50137	25 / 15	28	18	4.4	6.4	1	8.90
50138	25 / 20	28	22	3.9	6	1	8.90
50139	PO 32 / 12	35	15	5.5	7.5	1	14.50
50140	PO 32 / 15	35	18	5.4	7.4	1	14.50
50141	32 / 20	35	22	5	7.1	1	14.50
50142	32 / 25	35	28	4.5	6.8	1	14.50
50143	PO 40 / 12	42	15	6.1	8.1	1	26.19
50144	PO 40 / 15	42	18	6	8	1	26.19
50145	40 / 20	42	22	6.1	8.2	1	26.19
50146	40 / 25	42	28	6	8.3	1	26.19
50147	40 / 32	42	35	5.1	7.7	1	26.19
50148	PO 50 / 12	54	15	7.7	9.7	1	36.79
50149	PO 50 / 15	54	18	7.6	9.6	1	36.79
50150	50 / 20	54	22	7.4	9.5	1	36.79
50151	50 / 25	54	28	8.7	11	1	36.79
50152	50 / 32	54	35	8	10.6	1	36.79
50153	50 / 40	54	42	6.2	9.2	1	36.79
50164	65 / 50	76.1	54	11.1	14.6	1	82.17
50167	80 / 50	88.9	54	12.8	16.3	1	86.68
50168	80 / 65	88.9	76.1	10.8	16.1	1	86.68
50169	100 / 50	108	54	13.7	17.2	1	96.42
50171	100 / 65	108	76.1	13.1	18.4	1	96.42
50172	100 / 80	108	88.9	14.3	20.3	1	96.42

PO: Phase out as of April 2017

1.5.6 Bends

Geberit Mapress Stainless Steel bend (FKM, blue)

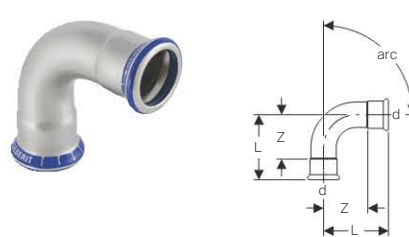

Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Silicone-free (LABS-free)
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)						
Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
arc / angle: 15°							
50182	PO 12	15	3	1		1	9.83
50184	PO 20	22	3.3	1.2		1	13.74
50185	PO 25	28	3.6	1.3		1	17.07
50186	PO 32	35	3.2	0.6		1	26.08
50187	PO 40	42	3.7	0.7		1	40.25
50188	PO 50	54	4.4	0.9		1	57.71
50191	PO 65	76.1	7.5	2.2		1	140.56
50192	PO 80	88.9	8.5	2.5		1	176.00
50193	PO 100	108	10.3	2.8		1	259.17
arc / angle: 30°							
50202	PO 12	15	3.3	1.3		1	9.83
50204	PO 20	22	3.7	1.6		1	13.74
50205	PO 25	28	4.1	1.8		1	17.07
50206	PO 32	35	3.7	1.1		1	26.08
50207	PO 40	42	4.4	1.4		1	40.25
50208	PO 50	54	5.2	1.7		1	57.71
50211	PO 65	76.1	8.8	3.5		1	140.56
50212	PO 80	88.9	10.1	4.1		1	176.00
50213	PO 100	108	12.2	4.7		1	259.17

PO: Phase out as of April 2017


Geberit Mapress Stainless Steel bend with plain end (FKM, blue)

Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
arc / angle: 45°							
50222	12	15	3.6	1.6		1	9.83
50223	15	18	3.7	1.7		1	11.13
50224	20	22	4.2	2.1		1	13.74
50225	25	28	4.8	2.5		1	17.07
50226	32	35	4.3	1.7		1	26.08
50227	40	42	5.1	2.1		1	40.25
50228	50	54	6.2	2.7		1	54.95
50231	65	76.1	10.3	5		1	140.56
50232	80	88.9	11.7	5.7		1	176.00
50233	100	108	14.5	7		1	259.17
arc / angle: 60°							
50262	PO	12	15	4	2	1	9.83
50264	PO	20	22	4.7	2.6	1	13.74
50265	PO	25	28	5.4	3.1	1	17.07
50266	PO	32	35	5	2.4	1	26.08
50267	PO	40	42	5.9	2.9	1	40.25
50268	PO	50	54	7.2	3.7	1	57.71
50271	PO	65	76.1	11.7	6.4	1	140.56
50272	PO	80	88.9	13.6	7.6	1	176.00
50273	PO	100	108	16.6	9.1	1	259.17
arc / angle: 90°							
50282		12	15	4.9	2.9	1	9.83
50283		15	18	5.3	3.3	1	11.13
50284		20	22	6.1	4	5	13.74
50285		25	28	7.2	4.9	5	17.07
50286		32	35	6.8	4.2	1	26.08
50287		40	42	8	5	1	38.34
50288		50	54	10	6.5	5	54.95
50291		65	76.1	15.9	10.6	1	140.56
50292		80	88.9	18.5	12.5	1	176.00
50293		100	108	23	15.5	1	259.17

PO: Phase out as of April 2017



- Bend 45° / 90° in the dimensions d76.1 / 88.9 / 108 with new masses as of 01.04.2017



Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Silicone-free (LABS-free)
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data


Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	H [cm]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
arc / angle: 45°							
50242	12	15	4.5	3.6	1.6	1	9.83
50243	15	18	4.2	3.7	1.7	1	11.13
50244	20	22	5.2	4.2	2.1	1	13.74
50245	25	28	5.6	4.8	2.5	1	17.07
50246	32	35	5.3	4.3	1.7	1	26.08
50247	40	42	6.1	5.1	2.1	1	40.25
50248	50	54	7.3	6.2	2.7	1	54.95
50251	65	76.1	11.1	10.3	5	1	140.56
50252	80	88.9	12.8	11.7	5.7	1	176.00
50253	100	108	15.8	14.5	7	1	259.17
arc / angle: 90°							
50312	12	15	5.9	4.9	2.9	1	9.83
50313	15	18	6.1	5.3	3.3	1	11.13
50314	20	22	7	6.1	4	1	13.74
50315	25	28	7.9	7.2	4.9	1	17.07
50316	32	35	7.7	6.8	4.2	1	26.08
50317	40	42	9	8	5	1	38.34
50318	50	54	11.1	10	6.5	1	54.95
50321	65	76.1	16.7	15.9	10.6	1	140.56
50322	80	88.9	19.5	18.5	12.5	1	176.00
50323	100	108	24.1	23	15.5	1	259.17



- Bend 45° / 90° in the dimensions d76.1 / 88.9 / 108 with new masses as of 01.04.2017

Geberit Mapress Stainless Steel bend with plain ends (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10


Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	H [cm]	H1 [cm]	K [cm]	K1 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
arc / angle: 15°										
30892	12	15	6	12.2	2.1	8.3			1	9.17
30893	15	18	5.5	12.8	1.5	8.8			1	9.37
30894	20	22	5	12.4	0.7	8.1			1	9.92
30905	25	28	4.5	13.4	0	8.9		5	1	10.28
30906	32	35	7.3	22.2	2	16.9			1	21.55
30907	40	42	8.9	28	3	22.1			1	26.52
30908	50	54	12.2	33.7	4.5	26			1	33.16
30009	65	76.1	8.4	20.4	0	12			1	103.91
30010	80	88.9	9.5	22	0	12.5			1	117.18
30011	100	108	11.7	25.4	0	13.7			1	140.41
arc / angle: 30°										
30932	12	15	6	12.2	2.1	8.3			1	9.17
30933	15	18	5.5	12.8	1.6	8.9			1	9.37
30934	20	22	5	12.4	0.6	8			1	9.92
30935	25	28	5.1	13	0	7.9		5	1	10.28
30936	32	35	8	21.4	2	15.4			1	21.55
30937	40	42	9.9	27.2	3	20.3			1	26.52
30938	50	54	13.4	32.6	5.5	24.7			1	33.16
30029	65	76.1	9.7	21.7	0	12			1	103.91
30030	80	88.9	11.1	23.6	0	12.5			1	117.18
30031	100	108	13.6	27.3	0	13.7			1	140.41
arc / angle: 45°										
30872	12	15	6.2	12	1.9	7.7		5	1	9.17
30873	15	18	5.8	12.4	1.6	8.2			1	9.37
30874	20	22	5.6	12	0.7	7.1			1	9.92
30875	25	28	5.8	12.2	0.2	6.6			1	10.28
30876	32	35	9.4	20.6	2	13.2			1	21.55
30877	40	42	11.4	26.2	0.1	14.9			1	26.52
30878	50	54	14.6	32.1	3.7	21.2			1	33.16
30049	65	76.1	11.1	23	0	11.9			1	103.91
30050	80	88.9	13	25.2	0	12.2			1	117.18
30051	100	108	15.7	29.4	0	13.7			1	140.41

Art. no.	DN	d, \varnothing [mm]	H [cm]	H1 [cm]	K [cm]	K1 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
arc / angle: 60°										
30942	12	15	6	12.2	2.1	8.3			1	9.17
30943	15	18	6.2	12.2	1.6	7.6			1	9.37
30944	20	22	6	11.8	0.5	6.3			1	9.92
30955	25	28	6.3	12.1	0	5.8			1	10.28
30956	32	35	9.7	20.3	2	12.6			1	21.55
30957	40	42	12	25.6	3	16.6			1	26.52
30958	50	54	16.2	30.6	5.5	19.9			1	33.16
30069	65	76.1	12.6	24.6	0	12			1	103.91
30070	80	88.9	14.6	27.1	0	12.5			1	117.18
30071	100	108	18	31.7	0	13.7			1	140.41
arc / angle: 90°										
30402	12	15	7	12	2.2	7.2	50	10		9.17
30403	15	18	7	12	1.7	6.7	50	10		9.37
30404	20	22	7	12	0	5	50	10		9.92
30405	25	28	8	12	0	4	50	10		10.28
30406	32	35	12	20	2	10		5	1	21.55
30407	40	42	15	25	3	13		5	1	26.52
30408	50	54	20	30	5.5	15.5		5	1	33.16
30089	65	76.1	16.6	28.6	0	12			1	103.91
30090	80	88.9	19.4	31.9	0	12.5			1	117.18
30091	100	108	24	37.7	0	13.7			1	140.41

Geberit Mapress Stainless Steel pipe bridge (FKM, blue)

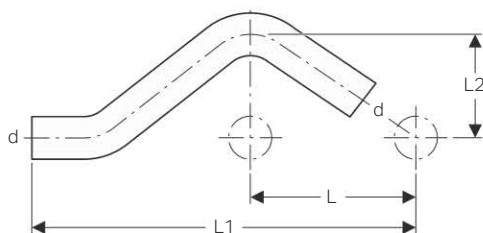

Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10


Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, \varnothing [mm]	L [cm]	L1 [cm]	L2 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
30802	12	15	5.7	15.8	3	25	5		7.91
30803	15	18	6	16.6	3.1	25	5		8.18
30804	20	22	6.5	17.9	3.3	25	5		9.29
30805	25	28	7.3	20.6	3.6			1	11.25

1.5.7 T-pieces

Geberit Mapress Stainless Steel T-piece, equal (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics


- Pressing indicator
- Silicone-free (LABS-free)
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, Ø [mm]	L [cm]	L1 [cm]	l [cm]	Z [cm]	Z1 [cm]	SU1 [pc.]	GBP/pc.
50332	12	15	6.4	3.9	3.2	1.2	1.9	1	15.09
50333	15	18	6.8	4.1	3.4	1.4	2.1	1	17.73
50334	20	22	7.4	4.4	3.7	1.6	2.3	1	19.90
50335	25	28	8.4	5	4.2	1.9	2.7	1	23.14
50336	32	35	10	5.7	5	2.4	3.1	1	29.35
50337	40	42	11.4	6.5	5.7	2.7	3.5	1	41.67
50338	50	54	13.8	7.7	6.9	3.4	4.2	1	51.76
50341	65	76.1	23	11	11.5	6.2	5.7	1	256.31
50342	80	88.9	26	12.8	13	7	6.8	1	286.55
50343	100	108	31	15.3	15.5	8	7.8	1	393.07

Geberit Mapress Stainless Steel T-piece, reduced (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Silicone-free (LABS-free)
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------


Art. no.	DN	d, Ø [mm]	d1, Ø [mm]	d2, Ø [mm]	L [cm]	L1 [cm]	l [cm]	l2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU1 [pc.]	GBP/pc.
50356	15 / 12 / 15	18	15	18	6.8	4.1	3.4	3.4	1.4	2.1	1.4	1	16.06
50357	20 / 12 / 20	22	15	22	7.4	4.3	3.7	3.7	1.6	2.3	1.6	1	17.92
50359	20 / 15 / 20	22	18	22	7.4	4.3	3.7	3.7	1.6	2.3	1.6	1	17.92
50362	25 / 12 / 25	28	15	28	8.4	4.6	4.2	4.2	1.9	2.6	1.9	1	21.48
50364	25 / 15 / 25	28	18	28	8.4	4.6	4.2	4.2	1.9	2.6	1.9	1	21.48
50366	25 / 20 / 25	28	22	28	8.4	4.7	4.2	4.2	1.9	2.6	1.9	1	21.48
50367	32 / 12 / 32	35	15	35	10	4.9	5	5	2.4	2.9	2.4	1	26.34
50368	32 / 15 / 32	35	18	35	10	4.9	5	5	2.4	2.9	2.4	1	26.79
50369	32 / 20 / 32	35	22	35	10	5	5	5	2.4	2.9	2.4	1	26.79

PO: Phase out as of April 2017

Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	L [cm]	L1 [cm]	l [cm]	l2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU1 [pc.]	GBP/pc.
50370	32 / 25 / 32	35	28	35	10	5.3	5	5	2.4	3	2.4	1	26.79
50371	40 / 12 / 40	42	15	42	11.4	5.3	5.7	5.7	2.7	3.3	2.7	1	38.67
50372	40 / 15 / 40	42	18	42	11.4	5.3	5.7	5.7	2.7	3.3	2.7	1	38.67
50373	40 / 20 / 40	42	22	42	11.4	5.4	5.7	5.7	2.7	3.3	2.7	1	38.67
50374	40 / 25 / 40	42	28	42	11.4	5.7	5.7	5.7	2.7	3.4	2.7	1	38.67
50375	40 / 32 / 40	42	35	42	11.4	6.1	5.7	5.7	2.7	3.5	2.7	1	38.67
50376	50 / 12 / 50	54	15	54	13.8	5.9	6.9	6.9	3.4	3.9	3.4	1	48.70
50377	50 / 15 / 50	54	18	54	13.8	5.9	6.9	6.9	3.4	3.9	3.4	1	48.70
50378	50 / 20 / 50	54	22	54	13.8	6	6.9	6.9	3.4	3.9	3.4	1	46.39
50379	50 / 25 / 50	54	28	54	13.8	6.3	6.9	6.9	3.4	4	3.4	1	46.39
50380	50 / 32 / 50	54	35	54	13.8	6.7	6.9	6.9	3.4	4.1	3.4	1	46.39
50381	50 / 40 / 50	54	42	54	13.8	7.1	6.9	6.9	3.4	4.1	3.4	1	46.39
50389	65 / 20 / 65	76.1	22	76.1	23	7.7	11.5	11.5	6.2	5.6	6.2	1	216.87
50390	65 / 25 / 65	76.1	28	76.1	23	7.9	11.5	11.5	6.2	5.6	6.2	1	216.87
50391	65 / 32 / 65	76.1	35	76.1	23	8.1	11.5	11.5	6.2	5.5	6.2	1	216.87
50392	65 / 40 / 65	76.1	42	76.1	23	8.1	11.5	11.5	6.2	5.1	6.2	1	216.87
50393	65 / 50 / 65	76.1	54	76.1	23	8.7	11.5	11.5	6.2	5.2	6.2	1	216.87
50395	80 / 20 / 80	88.9	22	88.9	26	8.5	13	13	7	6.4	7	1	241.48
50396	80 / 25 / 80	88.9	28	88.9	26	8.7	13	13	7	6.4	7	1	241.48
50397	80 / 32 / 80	88.9	35	88.9	26	9	13	13	7	6.4	7	1	241.48
50398	80 / 40 / 80	88.9	42	88.9	26	9.2	13	13	7	6.2	7	1	241.48
50399	80 / 50 / 80	88.9	54	88.9	26	9.3	13	13	7	5.8	7	1	241.48
50400	PO 80 / 65 / 80	88.9	76.1	88.9	26	11.4	13	13	7	6.1	7	1	241.48
50401	100 / 20 / 100	108	22	108	31	10.3	15.5	15.5	8	8.2	8	1	315.77
50402	100 / 25 / 100	108	28	108	31	10.5	15.5	15.5	8	8.2	8	1	315.77
50403	100 / 32 / 100	108	35	108	31	10.8	15.5	15.5	8	8.2	8	1	315.77
50404	100 / 40 / 100	108	42	108	31	11	15.5	15.5	8	8	8	1	315.77
50405	100 / 50 / 100	108	54	108	31	11.3	15.5	15.5	8	7.8	8	1	315.77
50407	100 / 65 / 100	108	76.1	108	31	12.4	15.5	15.5	8	7.1	8	1	315.77
50408	100 / 80 / 100	108	88.9	108	31	13.5	15.5	15.5	8	7.5	8	1	315.77

PO: Phase out as of April 2017

Geberit Mapress Stainless Steel T-piece with female thread (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Silicone-free (LABS-free)
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data


Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	d1, ø [mm]	L [cm]	L1 [cm]	l [cm]	l2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU1 [pc.]	GBP/pc.	
50413	12 / 15 / 12	15	1/2	15	6.4	4	3.2	3.2	1.2	2.7	1.2	1	15.59	
50414	15	18	1/2	18	6.8	4.2	3.4	3.4	1.4	2.9	1.4	1	16.00	
50415	15 / 20 / 15	18	3/4	18	6.8	4.4	3.4	3.4	1.4	2.9	1.4	1	16.00	
50416	20 / 15 / 20	22	1/2	22	7.4	4.3	3.7	3.7	1.6	3	1.6	1	19.08	
50417	20	22	3/4	22	7.4	4.6	3.7	3.7	1.6	3.1	1.6	1	19.08	
50418	25 / 15 / 25	28	1/2	28	8.4	4.6	4.2	4.2	1.9	3.3	1.9	1	21.94	
50419	25 / 20 / 25	28	3/4	28	8.4	4.9	4.2	4.2	1.9	3.4	1.9	1	21.94	
50420	PO	25	28	1	28	8.4	5.3	4.2	4.2	1.9	3.6	1.9	1	21.94
50421	32 / 15 / 32	35	1/2	35	10	5	5	5	2.4	3.7	2.4	1	26.26	
50422	32 / 20 / 32	35	3/4	35	10	5.3	5	5	2.4	3.8	2.4	1	26.26	
50424	40 / 15 / 40	42	1/2	42	11.4	5.3	5.7	5.7	2.7	4	2.7	1	30.58	
50425	40 / 20 / 40	42	3/4	42	11.4	5.6	5.7	5.7	2.7	4.1	2.7	1	30.58	
50427	50 / 15 / 50	54	1/2	54	13.8	5.9	6.9	6.9	3.4	4.6	3.4	1	39.07	
50428	50 / 20 / 50	54	3/4	54	13.8	6.2	6.9	6.9	3.4	4.7	3.4	1	39.07	
50429	50	54	2	54	13.8	7.9	6.9	6.9	3.4	5.6	3.4	1	41.03	
50437	65 / 20 / 65	76.1	3/4	76.1	23	7.9	11.5	11.5	6.2	6.4	6.2	1	210.92	
50438	65 / 50 / 65	76.1	2	76.1	23	8.9	11.5	11.5	6.2	6.6	6.2	1	210.92	
50440	80 / 20 / 80	88.9	3/4	88.9	26	8.8	13	13	7	7.3	7	1	226.38	
50441	80 / 50 / 80	88.9	2	88.9	26	9.6	13	13	7	7.3	7	1	226.38	
50443	100 / 20 / 100	108	3/4	108	31	10.5	15.5	15.5	8	9	8	1	288.51	
50444	100 / 50 / 100	108	2	108	31	11.5	15.5	15.5	8	9.2	8	1	288.51	

PO: Phase out as of April 2017

1.5.8 Adaptors, permanent

Geberit Mapress Stainless Steel adaptor with male thread (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Silicone-free (LABS-free)
- Seal ring made of FKM, blue
- Pressing socket with black protection plug


Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, \varnothing [mm]	R ["]	H [cm]	L [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
50452	PO	12	15	3/8	1.8	3.8	1	11.29
50453		12 / 15	15	1/2	2.1	4.1	1	11.29
50454		12 / 20	15	3/4	2.3	4.3	1	11.29
50455		15	18	1/2	2.2	4.2	1	12.65
50456		15 / 20	18	3/4	2.4	4.4	1	12.65
50457		20 / 15	22	1/2	2.1	4.2	1	13.99
50458		20	22	3/4	2.3	4.4	1	13.99
50459		20 / 25	22	1	2.5	4.6	1	13.99
50460		25 / 20	28	3/4	2.3	4.6	1	17.52
50461		25	28	1	2.3	4.8	5	17.52
50463		32 / 25	35	1	2.5	5.1	1	24.62
50464		32	35	1 1/4	2.7	5.3	1	24.62
50465		40 / 32	42	1 1/4	2.7	5.7	1	36.70
50466		40	42	1 1/2	2.7	5.7	1	36.70
50467		50 / 40	54	1 1/2	4.8	8.3	1	51.06
50468		50	54	2	5.4	8.9	1	51.06
50471		65	76.1	2 1/2	7	12.3	1	222.93

PO: Phase out as of April 2017

Geberit Mapress Stainless Steel adaptor with male thread and plain end (FKM, blue)



Application purposes


- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	R ["]	H [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
31932	12	15	1/2	5.7	25	5		9.92
31933	15	18	1/2	5.7	25	5		11.03
31936	20	22	3/4	5.9	25	5		12.14
31937	25	28	1	6.6	25	5		15.47
31938	32	35	1 1/4	8		5	1	22.11
31939	40	42	1 1/2	9.1		5	1	32.71
31940	50	54	2	10.2		5	1	44.22

Geberit Mapress Stainless Steel adaptor with female thread (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Silicone-free (LABS-free)
- Seal ring made of FKM, blue
- Pressing socket with black protection plug


Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
50484	12 / 15	15	1/2	3.7	0.4	1	11.29
50485	12 / 20	15	3/4	3.8	0.3	1	11.29
50486	15	18	1/2	3.7	0.4	1	12.65
50487	15 / 20	18	3/4	3.8	0.3	1	12.65
50488	20 / 15	22	1/2	3.6	0.2	1	13.99
50489	20	22	3/4	3.9	0.3	1	13.99
50490	20 / 25	22	1	4.2	0.4	1	13.99
50491	25 / 15	28	1/2	3.8	0.2	1	17.52
50492	25 / 20	28	3/4	3.9	0.3	1	17.52
50493	25	28	1	4.4	0.4	1	17.52
50494	32 / 25	35	1	4.5	0.2	1	24.62
50495	32	35	1 1/4	4.9	0.4	1	24.62
50496	PO 32 / 40	35	1 1/2	4.9	0.4	1	24.62
50497	PO 40 / 32	42	1 1/4	5.1	0.2	1	36.70
50498	40	42	1 1/2	5.3	0.4	1	36.70
50499	PO 50 / 40	54	1 1/2	7.1	2.2	1	51.06
50500	50	54	2	6.2	0.4	1	51.06

PO: Phase out as of April 2017

Geberit Mapress Stainless Steel adaptor with female thread and plain end (FKM, blue)



Application purposes


- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, \emptyset [mm]	Rp ["]	H [cm]	L [cm]	SU1 [pc.]	GBP/pc.
33846	20 / 15	22	1/2	4.5	5.8	1	14.06
33848	25 / 15	28	1/2	5.3	6.6	1	18.32
33850	32 / 15	35	1/2	5.6	6.9	1	24.27
33852	40 / 15	42	1/2	6.1	7.4	1	31.10
33854	50 / 15	54	1/2	6.6	7.9	1	37.06
33860	65 / 15	76.1	1/2	9.1	10.4	1	129.49
33862	80 / 15	88.9	1/2	10	11.3	1	184.01
33864	100 / 15	108	1/2	12.1	13.4	1	221.90

Geberit Mapress Stainless Steel adaptor with female thread and plain end, long (FKM, blue)



Application purposes


- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, \emptyset [mm]	Rp ["]	H [cm]	L [cm]	K [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
90932	12	15	1/2	13.5	14.8	9	5	1	9.92
90933	15	18	1/2	13.5	14.8	9	5	1	11.03
90934	15	18	3/4	13.3	15.2	9		1	11.03
90935	20	22	1/2	13.9	14.8	8.9	5	1	12.14
90936	20	22	3/4	13.7	15.2	8.7	5	1	12.14

Geberit Mapress Stainless Steel elbow adaptor 90° with male thread (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics


- Pressing indicator
- Silicone-free (LABS-free)
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	R ["]	H [cm]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
50524	12 / 15	15	1/2	3.7	5.7	3.7	1	15.95
50526	15	18	1/2	3.9	5.7	3.7	1	17.32
50529	20	22	3/4	4.6	6	3.9	1	22.26
50532	25	28	1	5.4	6.7	4.4	1	28.30
50533	32	35	1 1/4	6.3	7.5	4.9	1	37.91

Geberit Mapress Stainless Steel elbow adaptor 90° with female thread (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics


- Pressing indicator
- Silicone-free (LABS-free)
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	L1 [cm]	Z [cm]	Z1 [cm]	SU1 [pc.]	GBP/pc.
50544	12 / 15	15	1/2	5.7	3.7	3.7	2.4	1	15.34
50546	15	18	1/2	5.7	3.9	3.7	2.6	1	19.36
50549	20	22	3/4	6	4.6	3.9	3.1	1	22.26
50552	25	28	1	6.7	5.4	4.3	3.7	1	28.30
50553	32	35	1 1/4	7.5	6.3	4.9	4.4	1	37.91

Geberit Mapress Stainless Steel elbow adaptor 90° with female thread and plain end (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10


Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	H [cm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
33203	12 / 15	15	1/2	5.3	3.6	2.3	25	5	13.81

1.5.9 Adaptors and connections, detachable

Geberit Mapress Stainless Steel union (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics


- Pressing indicator
- Silicone-free (LABS-free)
- Union nut made of brass
- Seal ring made of FKM, blue
- Pressing socket with black protection plug
- Flat gasket made of FPM, green

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	G ["]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
50772	12	15	3/4	6.6	2.6	1	37.38
50773	15	18	3/4	6.9	2.9	1	42.54
50774	20	22	1	7.2	3	1	52.82
50775	25	28	1 1/4	7.7	3.1	1	80.14
50776	32	35	1 1/2	8.2	3	1	84.74
50777	40	42	1 3/4	9.5	3.5	1	122.12
50778	50	54	2 3/8	11.3	4.3	1	202.68

Geberit Mapress Stainless Steel adaptor union with male thread (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Silicone-free (LABS-free)
- Union nut made of brass
- Seal ring made of FKM, blue
- Pressing socket with black protection plug
- Flat gasket made of FPM, green

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------


Art. no.	DN	d, ø [mm]	R ["]	G ["]	H [cm]	L [cm]	SU1 [pc.]	GBP/pc.
50562	12 / 15	15	1/2	3/4	4.4	6.4	1	18.51
50563	PO 12 / 20	15	3/4	3/4	4.6	6.6	1	19.44
50564	15	18	1/2	3/4	4.4	6.4	1	20.08
50565	15 / 20	18	3/4	3/4	4.6	6.6	1	21.10
50566	20 / 15	22	1/2	1	4.6	6.7	1	21.15
50567	20	22	3/4	1	4.7	6.8	1	21.15
50568	20 / 25	22	1	1	5.2	7.3	1	22.21
50570	25	28	1	1 1/4	5.5	7.8	1	34.81
50571	32	35	1 1/4	1 1/2	5.9	8.5	1	45.26
50572	40	42	1 1/2	1 3/4	6	9	1	54.82
50573	50	54	2	2 3/8	6.8	10.3	1	94.77

PO: Phase out as of April 2017

Geberit Mapress Stainless Steel

Geberit Mapress Stainless Steel, FKM, blue
Adaptors and connections, detachable

Geberit Mapress Stainless Steel adaptor union with male thread, union nut made of CrNi steel (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10


Characteristics

- Pressing indicator
- Silicone-free (LABS-free)
- Seal ring made of FKM, blue
- Pressing socket with black protection plug
- Flat gasket made of FPM, green

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)							
Art. no.	DN	d, ø [mm]	R ["]	G ["]	H [cm]	L [cm]	SU1 [pc.]	GBP/pc.	
50581	12 / 15	15	1/2	3/4	4.4	6.4	1	25.25	
50582	12 / 20	15	3/4	3/4	4.6	6.6	1	25.25	
50583	15	18	1/2	3/4	4.4	6.4	1	28.94	
50584	15 / 20	18	3/4	3/4	4.6	6.6	1	28.94	
50585	20 / 15	22	1/2	1	4.6	6.7	1	30.40	
50586	20	22	3/4	1	4.7	6.8	1	30.40	
50587	20 / 25	22	1	1	5.2	7.3	1	30.40	
50588	25	28	1	1 1/4	5.5	7.8	1	45.85	
50589	32	35	1 1/4	1 1/2	5.9	8.5	1	61.18	
50590	40	42	1 1/2	1 3/4	6	9	1	71.09	
50591	50	54	2	2 3/8	6.8	10.3	1	122.26	

Geberit Mapress Stainless Steel adaptor union with female thread (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Silicone-free (LABS-free)
- Union nut made of brass
- Seal ring made of FKM, blue
- Pressing socket with black protection plug
- Flat gasket made of FPM, green


Technical data

Material		CrNiMo steel 1.4401 (EN 10088)							
----------	--	--------------------------------	--	--	--	--	--	--	--

Art. no.	DN	d, ø [mm]	Rp ["]	G ["]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
50611	12 / 15	15	1/2	3/4	5.9	2.6	1	19.44
50612	12 / 20	15	3/4	3/4	6.1	2.6	1	17.82
50613	15	18	1/2	3/4	5.9	2.6	1	21.10
50614	PO 15 / 20	18	3/4	3/4	6.1	2.6	1	21.10
50615	20	22	3/4	1	6.3	2.7	1	22.21
50616	20 / 25	22	1	1	6.6	2.8	1	22.21
50617	25	28	1	1 1/4	7.1	3.1	1	36.55
50618	32	35	1 1/4	1 1/2	7.7	3.2	1	47.52
50619	40	42	1 1/2	1 3/4	8.2	3.3	1	61.95
50620	50	54	2	2 3/8	9.5	3.7	1	103.12

PO: Phase out as of April 2017

Geberit Mapress Stainless Steel adaptor union with female thread, union nut made of CrNi steel (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10


Characteristics

- Pressing indicator
- Silicone-free (LABS-free)
- Seal ring made of FKM, blue
- Pressing socket with black protection plug
- Flat gasket made of FPM, green

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)							
Art. no.	DN	d, ø [mm]	Rp ["]	G ["]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.	
50631	12 / 15	15	1/2	3/4	5.9	2.6	1	25.25	
50632	12 / 20	15	3/4	3/4	6.1	2.6	1	25.25	
50633	15	18	1/2	3/4	5.9	2.6	1	28.94	
50634	15 / 20	18	3/4	3/4	6.1	2.6	1	28.94	
50635	20	22	3/4	1	6.3	2.7	1	30.40	
50636	20 / 25	22	1	1	6.6	2.8	1	30.40	
50637	25	28	1	1 1/4	7.1	3.1	1	45.85	
50638	32	35	1 1/4	1 1/2	7.7	3.2	1	61.18	
50639	40	42	1 1/2	1 3/4	8.2	3.3	1	71.09	
50640	50	54	2	2 3/8	9.5	3.7	1	122.26	

Geberit Mapress Stainless Steel adaptor with union nut (FKM, blue)



Application purposes

- Suitable exclusively for threads with an inner diameter of $\leq di$
- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics


- Pressing indicator
- Silicone-free (LABS-free)
- Union nut made of brass
- Seal ring made of FKM, blue
- Pressing socket with black protection plug
- Flat gasket made of FPM, green

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)							
Art. no.	DN	d, \varnothing [mm]	G ["]	di, \varnothing [mm]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.	
50652	PO	12	15	1/2	10	5.1	2.5	1	17.33
50653		12	15	3/4	13	3.7	1.1	1	13.62
50656		15	18	3/4	13	3.7	1.1	1	14.42
50661		20	22	1	20	4	1.1	1	19.94
50662	PO	20	22	1 1/4	26	4.3	1.3	1	19.94
50663	PO	20	22	1 1/2	32	4.4	1.3	1	19.94
50664		25	28	1	20	4	1.3	1	25.97
50665		25	28	1 1/4	26	4.4	1.3	1	25.97
50666	PO	25	28	1 1/2	32	4.6	1.3	1	25.97
50667		32	35	1 1/2	32	4.8	1.3	1	28.65
50668	PO	40	42	1 3/4	39	5.2	1.3	1	38.34
50670	PO	50	54	2 3/8	51	5.8	1.5	1	52.55

PO: Phase out as of April 2017

Geberit Mapress adaptor union with clamping ring for corrugated pipes, NPW, plain end

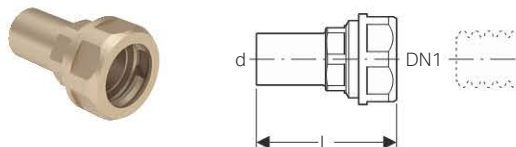


Application purposes

- For thermal media (solar)
- For mineral oils
- For fuels
- Only suitable for liquid media

Technical data

Material		DR brass CW602N					
Art. no.	DN	DN	d, \varnothing [mm]	L [cm]	PN [bar]	SU2 [pc.]	GBP/pc.
22421	12	16	15	6.4	10	2	12.91
22431	12	20	15	6.7	10	2	15.06
22422	15	16	18	6.4	10	2	13.99
22432	15	20	18	6.7	10	2	16.14
22423	20	16	22	6.8	10	2	15.06
22433	20	20	22	6.8	10	2	17.20
22444	25	25	28	6.8	10	2	23.66

Geberit Mapress Stainless Steel flange PN 10/16, with pressing socket (FKM, blue)

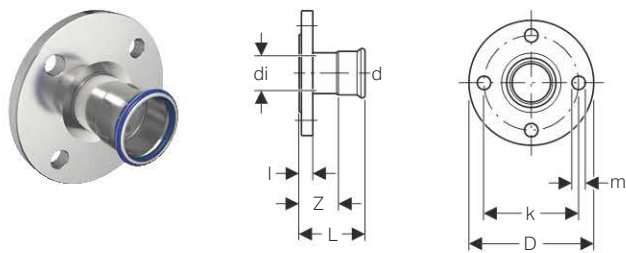

Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Silicone-free (LABS-free)
- Seal ring made of FKM, blue
- Pressing socket with black protection plug
- Design B1 (raised sealing strip with standard sealing strip), EN 1092-1

Technical data


Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	di, ø [mm]	D [cm]	k [mm]	m [mm]	L [cm]	l [cm]	Z [cm]	n [pc.]	PN [bar]	SU1 [pc.]	GBP/pc.
50673	15	18	15	9.5	65	14	6.2	1.6	4.2	4	10 / 16	1	44.57
50674	20	22	19	10.5	75	14	6.5	1.8	4.4	4	10 / 16	1	52.81
50675	25	28	25	11.5	85	14	6.9	1.8	4.6	4	10 / 16	1	64.49
50676	32	35	32	14	100	18	7.2	1.8	4.6	4	10 / 16	1	90.81
50677	40	42	39	15	110	18	7.9	1.8	4.9	4	10 / 16	1	107.09
50678	50	54	51	16.5	125	18	8.7	1.8	5.2	4	10 / 16	1	133.16
50679	65	76.1	72	18.5	145	18	11.8	1.8	6.5	4	10 / 16	1	214.87
50680	80	88.9	84.8	20	160	18	12.5	2	6.5	8	10 / 16	1	255.45
50681	100	108	103.9	22	180	18	13	2	5.5	8	10 / 16	1	314.18

Accessories

- Geberit flange gasket PN 10/16 → p. 92
- Geberit bolt set for flange connection, made of CrNi steel → p. 93

Geberit Mapress Stainless Steel flange PN 10/16, with plain end (FKM, blue)

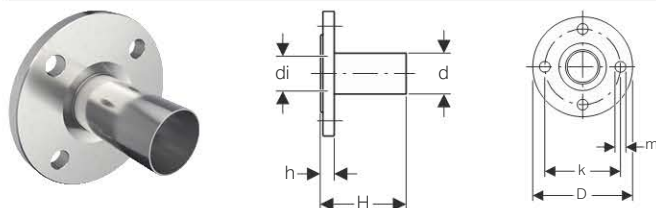

Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Silicone-free (LABS-free)
- Design B1 (raised sealing strip with standard sealing strip), EN 1092-1

Technical data


Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	di, ø [mm]	D [cm]	k [mm]	m [mm]	H [cm]	h [cm]	n [pc.]	PN [bar]	SU1 [pc.]	GBP/pc.
33748	50	54	51	16.5	125	18	11.3	1.8	4	10 / 16	1	166.79
33749	65	76.1	72	18.5	145	18	13.6	1.8	4	10 / 16	1	190.94
33750	80	88.9	84.8	20	160	18	15.2	2	8	10 / 16	1	223.52
33752	100	108	103.9	22	180	18	16.5	2	8	10 / 16	1	267.79

Accessories

- Geberit flange gasket PN 10/16 → p. 95
- Geberit bolt set for flange connection, made of CrNi steel → p. 96

Geberit Mapress Stainless Steel flanged stub with plain end, for loose flange PN 6 (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Silicone-free (LABS-free)
- Suitable for loose flange, in accordance with EN 1092-1, flange type 02

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, \emptyset [mm]	da [mm]	di, \emptyset [mm]	D [cm]	H [cm]	h [cm]	PN [bar]	SU1 [pc.]	GBP/pc.
36150	25	28	32	25.6	6	13.5	0.6	6	1	60.67
36151	32	35	40	32	7	13.5	0.6	6	1	87.35
36152	40	42	47	39	8	13.5	0.6	6	1	101.93
36153	50	54	59	51	9	13.5	0.8	6	1	126.19
36154	65	76.1	78	73.1	11	13.5	0.8	6	1	198.98
36155	80	88.9	91	84.9	12.8	13.5	1	6	1	232.97
36156	100	108	110	104	14.8	13.5	1	6	1	279.09


To order additionally

- Loose flange

Accessories

- Geberit flange gasket PN 6 → p. 95
- Geberit bolt set for flange connection, made of CrNi steel → p. 96

Geberit Mapress Stainless Steel flanged stub with plain end, for loose flange PN 10/16 (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Silicone-free (LABS-free)
- Suitable for loose flange, in accordance with EN 1092-1, flange type 02

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, \emptyset [mm]	da [mm]	di, \emptyset [mm]	D [cm]	H [cm]	h [cm]	PN [bar]	SU1 [pc.]	GBP/pc.
36141	20	22	27	19.6	5.8	13.5	0.6	10 / 16	1	56.42
36142	25	28	32	25.6	6.8	13.5	0.6	10 / 16	1	68.82
36143	32	35	40	32	7.8	13.5	0.6	10 / 16	1	99.41
36144	40	42	47	39	8.8	13.5	0.6	10 / 16	1	115.61
36145	50	54	59	51	10.2	13.5	0.8	10 / 16	1	143.14
36146	65	76.1	78	72.1	12.2	13.5	0.8	10 / 16	1	225.74
36147	80	88.9	91	84.9	13.8	13.5	1	10 / 16	1	264.27
36148	100	108	110	104	15.8	13.5	1	10 / 16	1	316.56

To order additionally

- Loose flange

Accessories

- Geberit flange gasket PN 10/16 → p. 95
- Geberit bolt set for flange connection, made of CrNi steel → p. 96

1.5.10 Sealings

Geberit Mapress Stainless Steel cap (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- For permanent termination of pipe ends
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics


- Pressing indicator
- Silicone-free (LABS-free)
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)				
Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
50752	12	15	2.3	0.3	1	10.14
50753	15	18	2.3	0.3	1	12.21
50754	20	22	2.4	0.3	1	13.42
50755	25	28	2.6	0.3	1	16.20
50756	32	35	2.9	0.3	1	22.31
50757	40	42	3.3	0.3	1	46.96
50758	50	54	3.8	0.3	1	53.46
50761	65	76.1	6	0.7	1	76.18
50762	80	88.9	6.7	0.7	1	93.99
50763	100	108	8.2	0.7	1	151.99

1.5.11 Connections

Geberit Mapress Stainless Steel elbow tap connector 90°, offset (FKM, blue)

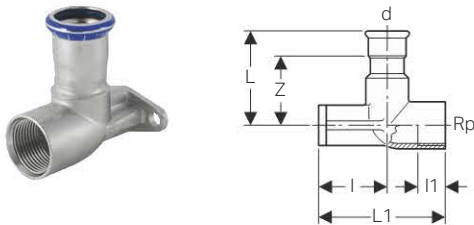

Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Silicone-free (LABS-free)
- Two fastening points

- Seal ring made of FKM, blue
- Pressing socket with black protection plug


Technical data

Material		CrNiMo steel 1.4401 (EN 10088)								
Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	l [cm]	l1 [cm]	Z [cm]	SU1 [pc.]	GBP/pc.	
L1 / length: 6.5 cm										
50792	PO	12 / 15	15	1/2	5	3.5	1.5	3	1	18.58
50793	PO	15	18	1/2	5	3.5	1.5	3	1	20.20
50794	PO	20	22	3/4	5.4	3.1	1.6	3.3	1	28.95

PO: Phase out as of April 2017

1.5.12 Feed-throughs

Geberit Mapress Stainless Steel bulkhead and deck passing with two plain ends (FKM, blue)

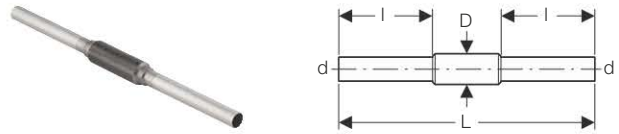

Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Silicone-free (LABS-free)
- Protective tube for welding
- Protective tube made of steel 1.0039, coated


Technical data

Material		CrNiMo steel 1.4401 (EN 10088)						
Art. no.	DN	d, ø [mm]	D [cm]	L [cm]	l [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
90980	12	15	2.5	45	16.5	5	1	46.45
90981	15	18	3	45	16.5		1	47.59
90982	20	22	3.4	45	16.5	5	1	49.92
90983	25	28	3.8	45	16.5	5	1	54.57
90984	32	35	4.5	45	16.5	5	1	66.17
90985	40	42	5.4	45	16.5	5	1	78.95
90986	50	54	7	45	16.5	5	1	87.08
90987	65	76.1	8.9	45	16.5		1	197.35
90988	80	88.9	10.8	45	16.5		1	220.59
90989	100	108	13.3	45	16.5		1	243.80

1.6 Geberit Mapress Stainless Steel, accessories

1.6.1 Insulations for connectors

Sound insulation set for Geberit single elbow tap connector 90°

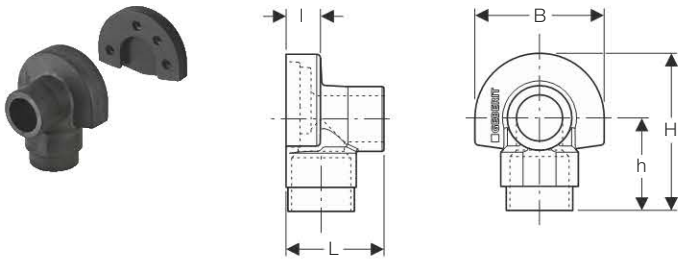

Application purposes

- For Geberit elbow tap connector with female thread Rp 1/2"

Characteristics

- Black

Technical data

Noise reduction at 3 bar flow pressure	12 dB(A)
Material	EPDM


Scope of delivery

- Sound insulation cap
- Sound insulation base

Art. no.	B [cm]	H [cm]	h [cm]	L [cm]	I [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
601.801.00.1	7	8.5	5	5.3	1.9	50	10	1	2.82

1.6.2 Caulks for pipes and fittings

Geberit sealing tape

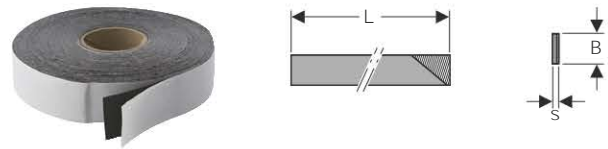

Application purposes

- For protecting Geberit Mapress system pipes and fittings against external corrosion factors
- For protecting the pipe cross-sections of Geberit Mepla against external corrosion factors
- For protecting Geberit Volex system pipes and fittings against external corrosion factors

Characteristics

- UV-resistant
- Black

Technical data

Installation temperature	-10 - +50 °C
Temperature resistance	-60 - +100 °C
Material	IIR


Art. no.	s [mm]	B [cm]	L [m]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
601.813.00.1	1	3	12.5	6	1	29.68
601.815.00.1	1	5	12.5	5	1	49.42



- Attach after pressure test

1.6.3 Pipe fastenings

Geberit pipe bracket, insulated, with threaded socket M8 / M10

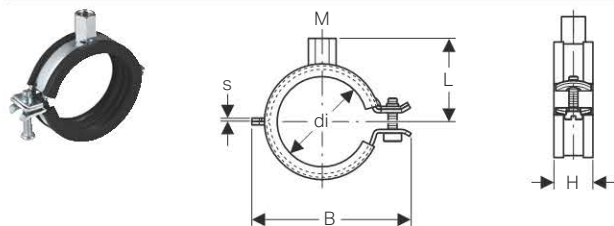

Application purposes

- For fastening Geberit Mapress system pipes
- For fastening Geberit PushFit system pipes, ML
- For fastening Geberit Mepla system pipes, ML
- For fastening Geberit Volex system pipes, ML

Characteristics

- Quick-lock
- Screw with slotted head and crosshead
- Threaded socket four-times welded
- Sound insulation in accordance with DIN 4109
- Zinc-plated

Technical data

Material	Steel
----------	-------

Art. no.	Surface	M [mm]	di, \varnothing [mm]	s [mm]	B [cm]	H [cm]	L [cm]	SU2 [pc.]	GBP/pc.
601.850.26.1	galvanized	8 / 10	12–14	1.5	4.7	2.3	2.9	50	1.37
601.851.26.1	galvanized	8 / 10	15–19	1.5	5.2	2.3	3.1	50	1.37
601.852.26.1	galvanized	8 / 10	20–24	1.5	5.6	2.3	3.4	50	1.37
601.853.26.1	galvanized	8 / 10	25–30	1.5	6.3	2.3	3.6	50	1.48
601.854.26.1	galvanized	8 / 10	32–37	1.5	6.8	2.3	3.9	50	1.59
601.855.26.1	galvanized	8 / 10	40–46	2	7.6	2.3	4.3	50	1.71
601.857.26.1	galvanized	8 / 10	54–58	2	8.9	2.3	4.8	50	2.06
601.859.26.1	galvanized	8 / 10	74–80	2	11.9	2.3	6.4	50	2.84
601.860.26.1	galvanized	8 / 10	83–91	2	13	2.3	6.8	50	2.96
601.861.26.1	galvanized	8 / 10	108–114	2.5	15.3	2.8	8.1	25	3.41

Geberit double nipple



Application purposes

- For building drainage

Characteristics



- Reduced
- Zinc-plated

Technical data

Material	Steel
----------	-------

Art. no.	Surface	G ["]	M [mm]	H [cm]	SW [mm]	SU1 [pc.]	GBP/pc.
362.856.26.1	galvanized	1/2	10	2.8	22	1	1.75

Geberit threaded pipe



Application purposes

- For fastening Geberit pipe brackets to base plates
- For building drainage
- For anchor point and sliding bracket fastenings



Characteristics

- Female thread continuously threaded
- Zinc-plated

Technical data

Material				Steel		
Art. no.	G ["]	D [cm]	L [m]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
362.857.26.1	1/2	2.5	1	2	1	22.51

Geberit base plate, square, two-hole, with threaded socket M8 / M10



Application purposes

- For building drainage
- For fastening pipe brackets to the building structure
- For fastening pipes to ceilings and walls
- For fastening support rails to the building structure
- For sliding bracket fastening of pipes



Characteristics

- Female thread
- Zinc-plated
- Two fastening points

Technical data

Material							Steel		
Art. no.	M [mm]	a [cm]	B [cm]	H [cm]	h [cm]	L [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
362.848.26.1	8 / 10	5.4	3	1.9	0.3	8	50	1	2.80

Geberit base plate, square, two-hole, with threaded socket M10 / G 1/2



Application purposes

- For fastening pipe brackets to the building structure
- For fastening pipes to ceilings and walls
- For anchor point and sliding bracket fastenings

Characteristics


- Male thread
- Female thread
- Zinc-plated
- Two fastening points

Technical data

Material								Steel		
Art. no.	G ["]	M [mm]	a [cm]	B [cm]	H [cm]	h [cm]	L [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
362.851.26.1	1/2	10	8.5	4	1.5	0.5	12	50	1	2.51

1.6.4 Connector fastenings

Fastening for Geberit Mapress elbow adaptor 90°

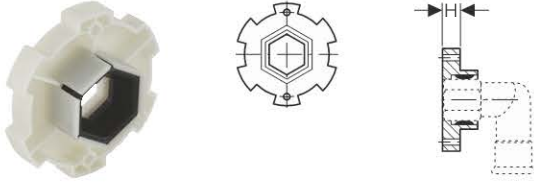

Application purposes


- For double panelling in drywall construction
- For fastening Geberit Mapress Carbon Steel elbow adaptors with female thread Rp 1/2"
- For fastening Geberit Mapress Stainless Steel elbow adaptors with female thread Rp 1/2"

Characteristics

- Sound-absorbing

Art. no.	H [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
90282	1.3	5	1	5.78

Geberit mounting plate, offset, single

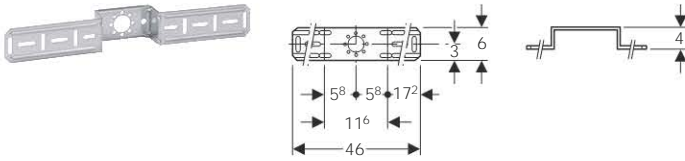

Application purposes

- For fastening Geberit Mepla connections
- For fastening Geberit Mapress connections

Characteristics

- Zinc-plated

Technical data


Material	Steel
----------	-------

Scope of delivery

- Fastening material

Art. no.	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
601.733.00.1	400	25	5	4.27

Geberit mounting plate, offset, double, connecting distance 10 cm or 12 cm

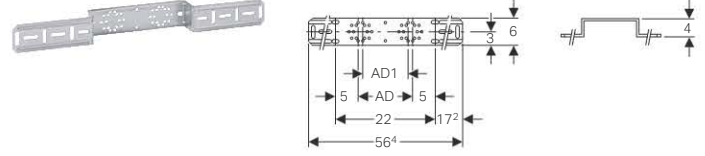

Application purposes

- For fastening Geberit Mepla connections
- For fastening Geberit Mapress connections

Characteristics

- Zinc-plated

Technical data

Material	Steel
----------	-------

Scope of delivery


- Fastening material

Art. no.	AD [cm]	AD1 [cm]	SU4 [pc.]	SU2 [pc.]	GBP/pc.
601.731.00.1	12	10	420	5	5.02

Accessories

- Drain pipe bracket for Geberit mounting plates → p. 93

Geberit mounting plate, offset, double, connecting distance 7.3 cm or 15.3 cm

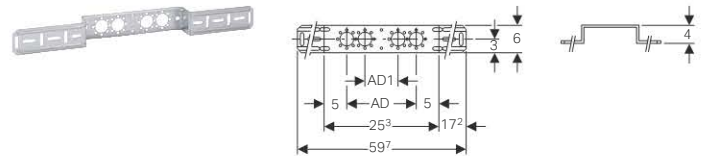

Application purposes

- For fastening Geberit Mepla connections
- For fastening Geberit Mapress connections

Characteristics

- Zinc-plated

Technical data

Material	Steel
----------	-------

Scope of delivery


- Fastening material

Art. no.	AD [cm]	AD1 [cm]	SU4 [pc.]	SU2 [pc.]	GBP/pc.
601.732.00.1	15.3	7.3	420	5	4.45

Accessories

- Drain pipe bracket for Geberit mounting plates → p. 93

Drain pipe bracket for Geberit mounting plates

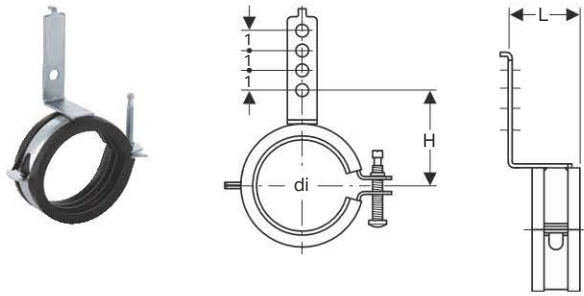

Characteristics

- Sound-absorbing
- Zinc-plated

Technical data

Material	Steel
----------	-------

Scope of delivery

- Fastening material

Art. no.	di, \varnothing [mm]	H [cm]	L [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
601.741.00.1	50-56	5.2-5.5	3.5	25	5	1	2.88

1.6.5 System seals

Geberit Mapress seal ring, CIIR, black



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Silicone-free (LABS-free)

Technical data

Operating temperature	-30 - +120 °C
Material	CIIR

Art. no.	DN	d, \varnothing [mm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
90401	10	12	10		0.29
90402	12	15	10		0.29
90403	15	18	10		0.38
90404	20	22	10		0.38
90405	25	28	10		0.42
90406	32	35	10		0.42
90407	40	42	10		0.61
90408	50	54	10		0.61
90409	65	76.1		1	1.69
90410	80	88.9		1	2.29
90411	100	108		1	4.44

Geberit Mapress seal ring, FKM, blue



Application purposes

- For solar technology, industry and shipbuilding
- Dimensions \varnothing 76.1–108 mm exclusively for Geberit Mapress Carbon Steel, Geberit Mapress Stainless Steel and Geberit Mapress CuNiFe
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Silicone-free (LABS-free)

Technical data

Operating temperature	-25 - +180 °C
Material	FKM

Art. no.	DN	d, \varnothing [mm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
90881	10	12		10	1.75
90882	12	15	100	10	0.75
90883	15	18	100	10	0.91
90884	20	22	100	10	1.08
90885	25	28	100	10	1.26
90886	32	35	100	10	1.47
90887	40	42	100	10	2.72
90888	50	54	100	10	3.79
90891	65	76.1	50	5	11.19
90892	80	88.9	50	5	13.91
90893	100	108	25	5	31.02

Geberit Mapress seal ring FKM, white



Application purposes

- For saturated steam
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10

Characteristics

- Silicone-free (LABS-free)

Technical data

Operating temperature	5–155 °C
Material	FKM

Art. no.	DN	d, \varnothing [mm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
91152	12	15	50	10	0.99
91153	15	18	50	10	1.19
91154	20	22	50	10	1.41
91155	25	28	50	10	1.64
91156	32	35	50	10	1.92
91157	40	42	50	10	3.55
91158	50	54	50	10	4.93

Geberit Mapress seal ring, HNBR, yellow



Application purposes


- For natural and liquefied gases
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Technical data

Operating temperature	-20 - +70 °C
Material	HNBR

Art. no.	DN	d, ø [mm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
90452	12	15	10	1	0.80
90453	15	18	10	1	0.90
90454	20	22	10	1	1.00
90455	25	28	10	1	1.14
90456	32	35	10	1	1.24
90457	40	42	10	1	1.49
90458	50	54	10	1	1.72
90471	65	76.1		1	8.61
90472	80	88.9		1	12.79
90473	100	108		1	16.00

Geberit Mapress flat gasket, EPDM, black



Application purposes


- For technical building systems, industry and shipbuilding
- For flat sealing Geberit Mapress screw connections
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Technical data

Operating temperature	0–100 °C
Material	EPDM

Art. no.	G ["]	di, ø [mm]	D [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
90080	1/2	10	1.85	0.2		10	0.22
90081	3/4	13	2.4	0.2	50	10	0.22
90082	1	19.6	3	0.2		10	0.22
90083	1 1/4	25.6	3.9	0.2		10	0.34
90084	1 1/2	32	4.45	0.2		10	0.46
90085	1 3/4	39	5.05	0.2		10	0.56
90086	2 3/8	51	6.6	0.3		10	1.14

Geberit Mapress flat gasket, FPM, green



Application purposes


- For flat sealing Geberit Mapress screw connections
- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Technical data

Operating temperature	-30 - +180 °C
Material	FPM

Art. no.	G ["]	di, ø [mm]	D [cm]	Z [cm]	SU2 [pc.]	GBP/pc.
90092	3/4	13	2.4	0.2	10	1.22
90094	1	19.6	3	0.2	10	2.14
90095	1 1/4	25.6	3.9	0.2	10	0.93
90096	1 1/2	32	4.45	0.2	10	1.14
90097	1 3/4	39	5.05	0.2	10	1.61
90098	2 3/8	51	6.6	0.3	10	2.95

Geberit Mapress flat gasket Centellen® R WS 3825



Application purposes


- For technical building systems, industry and shipbuilding
- For flat sealing Geberit Mapress screw connections
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Technical data

Operating temperature	-30 - +150 °C
Material	Centellen® R WS 3825

Art. no.	G ["]	di, ø [mm]	D [cm]	Z [cm]	SU2 [pc.]	GBP/pc.
600.021.00.1	1/2	10	1.8	0.2	5	0.91
600.022.00.1	3/4	13	2.4	0.2	5	0.93
600.023.00.1	1	20	3	0.2	5	0.95
600.024.00.1	1 1/8	21	3.5	0.2	5	1.12
600.025.00.1	1 1/4	26	3.9	0.2	5	1.18
600.026.00.1	1 1/2	32	4.5	0.2	5	1.22
600.027.00.1	1 3/4	39	5.1	0.2	5	1.28
600.028.00.1	2	42	5.6	0.2	5	1.36
600.029.00.1	2 1/4	42	6.3	0.2	5	1.41
600.030.00.1	2 3/8	51	6.6	0.2	5	1.52
600.031.00.1	2 1/2	54	7.2	0.2	5	1.72
600.032.00.1	2 3/4	57	7.8	0.2	5	2.08
600.033.00.1	3	72	8.5	0.2	5	2.26
600.034.00.1	3 1/2	85	9.7	0.2	5	2.55

Geberit Mapress flat gasket Centellen® HD WS 3822

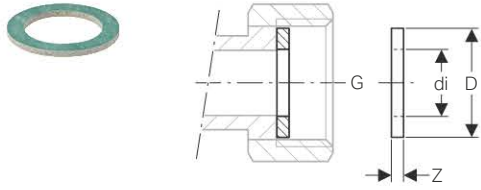

Application purposes

- For technical building systems, industry and shipbuilding
- For flat sealing Geberit Mapress screw connections
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Technical data

Operating temperature	-20 - +70 °C
Material	Centellen® HD WS 3822

Art. no.	G ["]	di, ø [mm]	D [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
90072	3/4	13	2.4	0.2	1	1.53
90074	1	19.6	3	0.2	1	1.53
90075	1 1/4	25.6	3.9	0.2	1	2.29
90076	1 1/2	32	4.45	0.2	1	2.29
90077	1 3/4	39	5.05	0.2	1	3.06
90078	2 3/8	51	6.6	0.3	1	3.83

Geberit flange gasket PN 6



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Technical data

Operating temperature	-30 - +180 °C
Material	Centellen® HD WS 3822

Art. no.	DN	di, ø [mm]	D [cm]	Z [cm]	PN [bar]	SU1 [pc.]	GBP/pc.
91041	15	20	4.4	0.2	6	1	1.49
91042	20	25	5.4	0.2	6	1	1.83
91043	25	30	6.4	0.2	6	1	2.16
91044	32	38	7.6	0.2	6	1	2.66
91045	40	45	8.6	0.2	6	1	3.34
91046	50	57	9.6	0.2	6	1	3.85
91047	65	76	11.6	0.2	6	1	4.34
91048	80	89	13.2	0.2	6	1	5.84
91049	100	108	15.2	0.2	6	1	6.67

O-ring set for Geberit Mepla screw unions, conical sealing



Application purposes

- For natural and liquefied gases
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Yellow

Technical data

Operating temperature	-20 - +70 °C
Material	HNBR

Scope of delivery

- Set of 2 pieces

Art. no.	G ["]	di, ø [mm]	s [mm]	SU1 [pc.]	GBP/pc.
242.520.00.1	7/8	20.35	1.78	1	3.39
242.521.00.1	1 1/8	25.07	2.62	1	4.51

Geberit flange gasket PN 10/16



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10


Technical data

Operating temperature	-30 - +180 °C
Material	Centellen® HD WS 3822

Art. no.	DN	di, ø [mm]	D [cm]	Z [cm]	PN [bar]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
91031	15	20	5	0.2	10 / 16	1	1	1.18
91032	20	25	6	0.2	10 / 16	5	1	1.43
91033	25	30	7	0.2	10 / 16	5	1	1.71
91034	32	38	8.2	0.2	10 / 16	5	1	2.10
91035	40	45	9.2	0.2	10 / 16	5	1	2.62
91036	50	57	10.7	0.2	10 / 16	5	1	3.00
91037	65	76	12.7	0.2	10 / 16	5	1	3.41
91038	80	89	14.2	0.2	10 / 16	5	1	4.20
91039	100	108	16.2	0.2	10 / 16	5	1	5.25

1.6.6 Sets of bolts for flange connections

Geberit bolt set for flange connection, made of CrNi steel



Application purposes

- For flanges made of stainless steel, gunmetal and brass

Characteristics

- Steel type A2, strength class 70, EN ISO 3506-1

Technical data

Material	CrNi steel 1.4301 (EN 10088)
----------	------------------------------

Scope of delivery

- Bolt
- 2 washers
- Nut

Art. no.	M [mm]	m [mm]	L [cm]	IK [cm]	SU2 [pc.]	GBP/pc.
91164	10	11	4.5	3.1	4	1.64
91165	10	11	5	3.6	4	1.64
91166	12	14	5	3	4	2.06
91167	12	14	5.5	3.5	4	2.06
91168	12	14	6	4	4	1.57
91169	16	18	5.5	3.3	4	1.87
91170	16	18	6	3.8	4	1.87
91171	16	18	6.5	4.3	4	1.87
91172	16	18	7	4.8	4	1.87
91173	16	18	8	5.8	4	1.87



2. Geberit Mapress Carbon Steel

2.1	Preliminary remarks.....	100
	Application overview: Geberit Mapress Carbon Steel	102
2.2	Geberit Mapress Carbon Steel	104
2.2.1	System pipes 1.0034 (E 195).....	104
2.2.2	System pipes 1.0215 (E 220).....	104
2.2.3	Pipe nipples	105
2.2.4	Couplings	105
2.2.5	Reducers.....	106
2.2.6	Bends	107
2.2.7	T-pieces.....	109
2.2.8	Pipe crosses	113
2.2.9	Adaptors, permanent.....	115
2.2.10	Adaptors and connections, detachable.....	120
2.2.11	Compensators	125
2.2.12	Sealings.....	125
2.2.13	T-pieces for heating	126
2.2.14	Connections for heating.....	126
2.3	Geberit Mapress Carbon Steel, FKM, blue	132
2.3.1	System pipes 1.0034 (E 195).....	132
2.3.2	System pipes 1.0215 (E 220).....	132
2.3.3	Pipe nipples	132
2.3.4	Couplings	133
2.3.5	Reducers.....	133
2.3.6	Bends	134
2.3.7	T-pieces.....	136
2.3.8	Adaptors, permanent.....	139
2.3.9	Adaptors and connections, detachable.....	143
2.3.10	Sealings.....	146
2.4	Accessories for Geberit Mapress Carbon Steel.....	147
2.4.1	Caulks for pipes and fittings	147
2.4.2	Pipe covers.....	147
2.4.3	Pipe fastenings.....	148
2.4.4	Connector fastenings	150
2.4.5	System seals.....	150
2.4.6	Sets of bolts for flange connections	152



2.1 Preliminary remarks

Introduction to Geberit Mapress Carbon Steel

Geberit Mapress Carbon Steel is especially suited for closed heating and cooling circuits. For solar and industrial installations, there is a special range of fittings available.

Thanks to the pressing technology, installations can be carried out reliably and quickly without complex welding and soldering.

There are three types of Carbon Steel pipe available; externally galvanised for closed heating and industrial applications, plastic coated for chilled water applications, and internally and externally galvanised pipe made specifically for wet sprinkler systems.

Geberit Mapress Carbon Steel is not suitable for drinking water or open heating circuits.

Benefits of Geberit Mapress Carbon Steel

Quick

Lower labour costs in comparison to conventional connection technology

Clean

Extremely suitable for renovation of living areas
Seal rings are protected from dirt

Safe

No danger of fire as no welding or soldering necessary
Unpressed connections are easily identified
It is easy to distinguish between product materials using the indicator colours
Application ranges are easily identified by the plug colours
No danger of confusion with third-party products

Economical

No consumables such as oxygen or gas required

Simple

Simple connection technology

Universal

Can be used for surface-mounted and concealed installations

Variety of pipes

Three types of Carbon Steel pipe to suit different applications, including plastic coated for chilled applications.

Experienced

More than 30 years of practical experience in pressing technology

Always consider

The 6 stage pressing process

- Cut and deburr the pipe
- Mark the insertion depth on the pipe
- Prepare the fitting
- Insert the pipe in to the fitting
- Press with the appropriate jaw or collar
- Remove the pressing indicator

Check you are using the correct material for the required application. See page 98 - 99 for an in depth overview of the applications for Geberit Mapress Carbon Steel.

Only Geberit Mapress system pipes are suitable to press Geberit Mapress Carbon Steel fittings. To adapt on to existing or dissimilar materials you must use a threaded connection.

Use the correct tooling

Always check that you are using the correct tools, this can be checked in the Geberit Tooling Product Guide and Price List.

Make sure that the tools you are using are in a good condition and are calibrated. There should be a sticker on the tool, jaws, collars and adapters to tell you when the tool next needs calibrating. Go to www.geberit.co.uk/toolservice to find your nearest tool service agent.

If you require any technical assistance, please contact the technical department on 01926 516800, or email technical@geberit.co.uk.



Application overview: Geberit Mapress Carbon Steel

Geberit Great Britain, version: December 2016

Application purposes	Operating temperature	Maximum operating pressure	Pipes		
			Carbon steel, outside zinc-plated	Carbon steel, outside PP-jacketed	Carbon steel, inside and outside zinc-plated
Liquid media					
For heating water	0–100 °C	16 bar / 1600 kPa	✓ ²⁾	✓ ²⁾	
For cooling water without antifreeze agent	0–100 °C	16 bar / 1600 kPa	✓ ²⁾	✓ ²⁾	
For cooling water with antifreeze agent	-30 – +120 °C	16 bar / 1600 kPa	✓ ²⁾	✓ ²⁾	
For remote network heating water ≤ 120 °C	0–120 °C	16 bar / 1600 kPa	✓ ²⁾		
For remote network heating water ≤ 140 °C	0–140 °C	16 bar / 1600 kPa	✓ ²⁾		
For extinguishing water (wet)	0–70 °C	16 bar / 1600 kPa			✓
For sprinklers (wet)	0–70 °C	16 / 12 / 10 bar 1600 / 1200 / 1000 kPa			✓ ⁴⁾
For thermal media (solar)	-25 – +220 °C ¹⁾	10 bar 1000 kPa	✓ ²⁾		
For mineral oils	Upon request	Upon request	✓		
For fuels	Upon request	Upon request	✓		
Gaseous media					
For compressed air (oil purity class 0–3)	0–100 °C	25 / 16 / 12 bar 2500 / 1600 / 1200 kPa	✓ ³⁾	✓ ³⁾	✓ ³⁾
For compressed air (oil purity class 0–X)	0–100 °C	25 / 16 / 12 bar 2500 / 1600 / 1200 kPa	✓ ³⁾	✓ ³⁾	✓ ³⁾
For inert gases (e.g. nitrogen)	Upon request	Upon request	Upon request		

✓ Application generally approved if the defined additional requirements are met in accordance with the footnotes

¹⁾ Service life with collector downtime: 200 h/a at 180 °C, 60 h/a at 200 °C, total of 500 h/service life at 220 °C

²⁾ Closed systems only

³⁾ 25 bar / 2500 kPa for d12–28, 16 bar / 1600 kPa for d35–54, 12 bar / 1200 kPa for d66.7–108

⁴⁾ 16 bar / 1600 kPa for d22–54, 12 bar / 1200 kPa for d66.7–76.1, 10 bar / 1000 kPa for d88.9–108

⁵⁾ Only use approved inhibitors

⁶⁾ Only use approved antifreeze agents

⁷⁾ Oil purity class in accordance with ISO 8573-1:2010E; for details on moisture and particles, see technical information "Geberit Piping Systems for Compressed Air Installations"


⁸⁾ After Geberit approval

	Fittings		Seal rings		Flat gaskets for screw connections			Flange gaskets
	Carbon steel, outside zinc-plated	Brass	CIIR, black	FKM, blue	EPDM, black	FPM, green	Centellen® R WS 3825	Centellen® HD WS 3822
	✓ ²⁾	✓ ²⁾	✓ ⁵⁾		✓ ⁵⁾			✓
	✓ ²⁾	✓ ²⁾	✓		✓			✓
	✓ ²⁾	✓ ²⁾	✓ ⁶⁾				✓	✓
	✓ ²⁾	✓ ²⁾	✓ ⁵⁾			✓ ⁵⁾	✓	✓
	✓ ²⁾	✓ ²⁾		✓ ⁵⁾			✓	✓
	✓		✓		✓			✓
	✓		✓		✓			✓
	✓	✓		✓		✓		✓
	✓	✓		✓		✓		✓
	✓	✓		✓ ⁸⁾		✓ ⁸⁾		✓ ⁸⁾
	✓	✓	✓ ⁷⁾		✓ ⁷⁾			✓
	✓	✓		✓ ⁷⁾		✓ ⁷⁾		✓
	Upon request	Upon request	✓		✓			✓

2.2 Geberit Mapress Carbon Steel

2.2.1 System pipes 1.0034 (E 195)

Geberit Mapress Carbon Steel system pipe, outside zinc-plated, small bundle

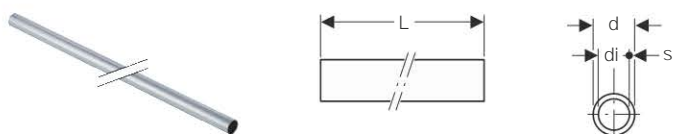

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Carbon Steel → p. 102

Characteristics


- Outside zinc-plated

Technical data

Material	Non-alloy steel 1.0034 E195 (EN 10305)
Surface roughness	10 µm
Thermal expansion	0.012 mm/(m · K)
Thermal conductivity, pipe	60 W/(m · K)

Art. no.	DN	d, ø [mm]	di, ø [mm]	s [mm]	L [m]	SU3 [m]	SU2 [m]	GBP/m
29251	10	12	9.6	1.2	6	120		2.12
29252	12	15	12.6	1.2	6	120		2.16
29253	15	18	15.6	1.2	6	90		2.59
29254	20	22	19	1.5	6	60		3.45
29255	25	28	25	1.5	6	60		4.84
29256	32	35	32	1.5	6	30		6.25
29257	40	42	39	1.5	6	30		8.58
29258	50	54	51	1.5	6	30		11.13
29208	65	66.7	63.7	1.5	6		6	15.39
29209	65	76.1	72.1	2	6		6	24.52
29210	80	88.9	84.9	2	6		6	27.72
29211	100	108	104	2	6		6	32.38

Geberit Mapress Carbon Steel system pipe, plastic jacketed, small bundle

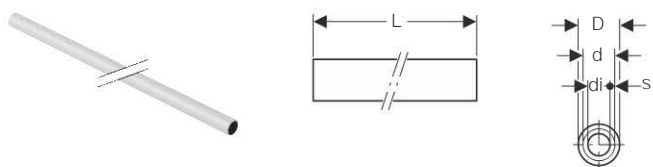

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Carbon Steel → p. 102

Characteristics

- Plastic jacketing made of white PP


Technical data

Material	Non-alloy steel 1.0034 E195 (EN 10305)
Surface roughness	10 µm
Thermal expansion	0.012 mm/(m · K)
Thermal conductivity, pipe	60 W/(m · K)

Art. no.	DN	d, ø [mm]	di, ø [mm]	D [cm]	s [mm]	L [m]	SU3 [m]	GBP/m
19201	10	12	9.6	1.4	1.2	6	120	2.90
19202	12	15	12.6	1.7	1.2	6	120	2.95
19203	15	18	15.6	2	1.2	6	90	3.41
19204	20	22	19	2.4	1.5	6	60	4.66
19205	25	28	25	3	1.5	6	60	6.10
19206	32	35	32	3.7	1.5	6	30	7.91
19207	40	42	39	4.4	1.5	6	30	10.21
19208	50	54	51	5.6	1.5	6	30	13.15

2.2.2 System pipes 1.0215 (E 220)

Geberit Mapress Carbon Steel system pipe, inside and outside zinc-plated, small bundle

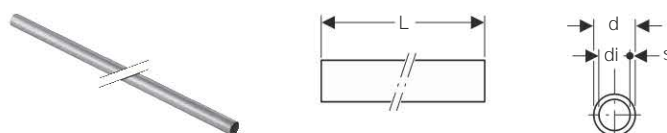

Application purposes

- For extinguishing water and sprinklers
- Application overview: Geberit Mapress Carbon Steel → p. 102

Characteristics

- Sendzimir galvanized

Technical data


Material	Non-alloy steel 1.0215 E220 (EN 10305)
Surface roughness	10 µm
Thermal expansion	0.012 mm/(m · K)
Thermal conductivity, pipe	60 W/(m · K)

Art. no.	DN	d, ø [mm]	di, ø [mm]	s [mm]	L [m]	SU3 [m]	SU2 [m]	GBP/m
19452	12	15	12	1.5	6	60		2.01
19453	15	18	15	1.5	6	60		2.45
19454	20	22	19	1.5	6	60		3.34
19455	25	28	25	1.5	6	60		4.72
19456	32	35	32	1.5	6	30		5.82
19457	40	42	39	1.5	6	30		6.90
19458	50	54	51	1.5	6	30		8.84
19462	PO	65	66.7	63.7	1.5	6	6	13.86
19459	65	76.1	72.1	2	6		6	16.59
19460	80	88.9	84.9	2	6		6	20.48
19461	100	108	104	2	6		6	26.57

PO: Phase out as of April 2017

2.2.3 Pipe nipples

Geberit Mapress Carbon Steel pipe nipple, outside zinc-plated



Application purposes

- For shortest construction length between two pressing sockets
- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Carbon Steel → p. 102

Characteristics

- Outside zinc-plated


Technical data

Material	Non-alloy steel 1.0034 E195 (EN 10305)
----------	--

Art. no.	DN	d, Ø [mm]	di, Ø [mm]	s [mm]	L [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
22050	12	15	12.6	1.2	5		5	1	1.03
22051	15	18	15.6	1.2	5	25	5		1.14
22052	20	22	19	1.5	5.2		5	1	1.20
22053	25	28	25	1.5	5.6	25	5		1.63
22054	32	35	32	1.5	6.2		5	1	2.87
22055	40	42	39	1.5	8		5	1	4.07
22056	50	54	51	1.5	9		5	1	5.27
22057	65	76.1	72.1	2	13.6			1	24.49
22058	80	88.9	84.9	2	15			1	28.66
22059	100	108	104	2	18			1	40.63

2.2.4 Couplings

Geberit Mapress Carbon Steel coupling



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Carbon Steel → p. 102

Characteristics


- Pressing indicator
- Leaky if unpressed
- Outside zinc-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Material	Non-alloy steel 1.0034 E195 (EN 10305)
----------	--

Art. no.	DN	d, Ø [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
22001	10	12	4.2	0.8	100	20		2.02
22002	12	15	4.8	0.8	200	20		1.75
22003	15	18	4.8	0.8	200	20		1.91
22004	20	22	5	0.8	200	20		2.24
22005	25	28	5.4	0.8	100	20		2.72
22006	32	35	6.2	1	100	10		4.67
22007	40	42	7.1	1.1	48	4		6.36
22008	50	54	8.3	1.3	48	4		7.62
22012	65	66.7	12.7	2.7	5		1	29.89
22009	65	76.1	14.1	3.5	20		1	42.09
22010	80	88.9	16.2	4.2	10		1	49.12
22011	100	108	19.4	4.4	10		1	63.12

Geberit Mapress Carbon Steel coupling, reduced



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Carbon Steel → p. 102

Characteristics


- Pressing indicator
- Leaky if unpressed
- Outside zinc-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Material	Non-alloy steel 1.0034 E195 (EN 10305)
----------	--

Art. no.	DN	d, Ø [mm]	d1, Ø [mm]	L [cm]	Z [cm]	SU2 [pc.]	GBP/pc.
22023	40 / 32	42	35	7.9	1.9	4	8.63
22024	50 / 32	54	35	9.3	2.8	4	24.80
22025	50 / 40	54	42	9.2	2.3	4	24.80

Geberit Mapress Carbon Steel slip coupling



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Carbon Steel → p. 102

Characteristics

- Pressing indicator
- Leaky if unpressed
- Outside zinc-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug


Technical data

Material	Non-alloy steel 1.0034 E195 (EN 10305)
----------	--

Art. no.	DN	d, Ø [mm]	E [cm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
22101	10	12	2.5	6.7	1.7	25	5		2.07
22102	12	15	2.5	8	3	100	20		2.22
22103	15	18	2.5	8	3	50	10		2.35
22104	20	22	2.5	8.4	3.4	100	20		2.61
22105	25	28	3	9.1	3.1	100	10		3.46
22106	32	35	3	10.2	4.2	50	10		7.04
22107	40	42	4	12	4	48	4		7.89
22108	50	54	4	14	6	24	4		10.20
22112	65	66.7	5	22	12			1	44.74
22109	65	76.1	6	23	11	10		1	68.25
22110	80	88.9	7	26	12	5		1	77.06
22111	100	108	8	31	15	5		1	92.46

2.2.5 Reducers

Geberit Mapress Carbon Steel reducer with plain end



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Carbon Steel → p. 102

Characteristics

- Pressing indicator
- Leaky if unpressed
- Outside zinc-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug


Technical data

Material	Non-alloy steel 1.0034 E195 (EN 10305)
----------	--

Art. no.	DN	d, ø [mm]	d1, ø [mm]	H [cm]	L [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
22301	12 / 10	15	12	3.4	5.1	50	10		1.56
22302	15 / 10	18	12	3.6	5.3	25	5		1.65
22303	15 / 12	18	15	3.5	5.5	200	20		1.65
22304	20 / 10	22	12	4.3	6	25	5		1.65
22305	20 / 12	22	15	3.9	5.9	200	20		1.65
22306	20 / 15	22	18	3.7	5.7	200	20		1.65
22349	25 / 10	28	12	5	6.7			1	2.22
22307	25 / 12	28	15	4.6	6.6	100	20		2.33
22308	25 / 15	28	18	4.4	6.4	100	20		2.33
22309	25 / 20	28	22	3.9	6	200	20		2.33
22310	32 / 12	35	15	5.5	7.5	50	5		2.71
22311	32 / 15	35	18	5.5	7.4	50	5		2.71
22312	32 / 20	35	22	5	7.1	100	10		2.71
22313	32 / 25	35	28	4.5	6.8	100	5		2.71
22315	40 / 15	42	18	6	8	24	4		6.39
22316	40 / 20	42	22	6.1	8.2	48	4		6.39
22317	40 / 25	42	28	6	8.3	48	4		6.39
22318	40 / 32	42	35	5.1	7.7	48	4		6.39
22320	50 / 15	54	18	7.5	9.5		5	1	12.76
22321	50 / 20	54	22	7.4	9.5	48	4		12.76
22322	50 / 25	54	28	8.7	11	48	4		12.76
22323	50 / 32	54	35	8	10.6	48	4		12.76
22324	50 / 40	54	42	6.2	9.2	48	4		12.76
22327	65 / 50	66.7	54	9.1	12.7	5		1	28.61
22330	65 / 40	76.1	42	9.7	12.7	25		1	37.31
22331	65 / 50	76.1	54	11.1	14.6	25		1	37.31
22332	65 / 65	76.1	66.7	10.1	15.1			1	37.31
22338	80 / 50	88.9	54	12.8	16.3	5		1	45.42
22339	80 / 65	88.9	76.1	10.8	16.1	5		1	45.42
22345	100 / 50	108	54	13.7	17.2	5		1	48.97
22346	100 / 65	108	76.1	13.1	18.4	5		1	48.97
22348	100 / 80	108	88.9	14.3	20.3	5		1	48.97

2.2.6 Bends

Geberit Mapress Carbon Steel bend

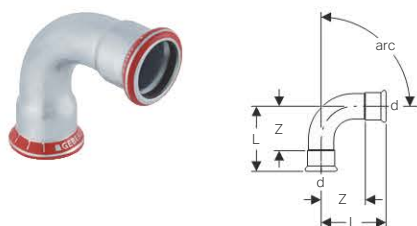

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Carbon Steel → p. 102

Characteristics

- Pressing indicator
- Leaky if unpressed
- Outside zinc-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug


Technical data

Material	Non-alloy steel 1.0034 E195 (EN 10305)							
Art. no.	DN	d, \emptyset [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
arc / angle: 45°								
20601	10	12	3.2	1.5	25	5		2.37
20602	12	15	3.6	1.6	200	20		2.78
20603	15	18	3.7	1.7	200	20		2.89
20604	20	22	4.2	2.1	100	20		3.54
20605	25	28	4.8	2.5	100	10		4.81
23606	32	35	4.3	1.7	100	5		8.94
23607	40	42	5.1	2.1	48	4		14.14
23608	50	54	6.2	2.7	50	2		18.74
20612	65	66.7	9.3	4.2	5		1	46.68
20609	65	76.1	10.3	5	15		1	63.12
20610	80	88.9	11.7	5.7	5		1	75.77
20611	100	108	14.5	7	5		1	116.31
arc / angle: 90°								
20101	10	12	4.2	2.5	100	20		2.37
20102	12	15	4.9	2.9	200	20		2.59
20103	15	18	5.3	3.3	200	20		3.00
20104	20	22	6.1	4	100	20		3.50
20105	25	28	7.2	4.9	50	10		4.80
23106	32	35	6.8	4.2	50	5		11.48
23107	40	42	8	5	48	4		18.36
23108	50	54	10	6.5	24	4		21.93
20112	65	66.7	14.1	9.1	5		1	47.11
20109	65	76.1	15.9	10.6	10		1	67.13
20110	80	88.9	18.5	12.5	5		1	84.87
20111	100	108	23	15.5	5		1	116.31



- Bend 45° / 90° in the dimensions d76.1 / 88.9 / 108 with new masses as of 01.04.2017

Geberit Mapress Carbon Steel bend with plain end

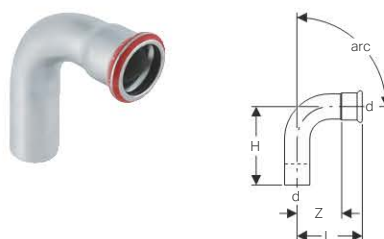

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Carbon Steel → p. 102

Characteristics

- Pressing indicator
- Leaky if unpressed
- Outside zinc-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug


Technical data

Material	Non-alloy steel 1.0034 E195 (EN 10305)								
Art. no.	DN	d, \emptyset [mm]	H [cm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
arc / angle: 45°									
20701	10	12	4.1	3.2	1.5	50	10		2.37
20702	12	15	4.5	3.6	1.6	200	20		2.78
20703	15	18	4.2	3.7	1.7	200	20		2.89
20704	20	22	5.2	4.2	2.1	100	20		3.54
20705	25	28	5.6	4.8	2.5	100	10		4.81
23706	32	35	5.3	4.3	1.7	100	5		8.94
23707	40	42	6.1	5.1	2.1	48	4		14.14
23708	50	54	7.3	6.2	2.7	48	2		18.74
20709	65	76.1	11.1	10.3	5	15		1	63.12
20710	80	88.9	12.8	11.7	5.7	5		1	75.77
20711	100	108	15.8	14.5	7	5		1	116.31
arc / angle: 90°									
20301	10	12	4.8	4.2	2.5	50	10		2.37
20302	12	15	5.9	4.9	2.9	200	20		2.59
20303	15	18	6.1	5.3	3.3	200	20		3.00
20304	20	22	7	6.1	4	100	20		3.50
20305	25	28	7.9	7.2	4.9	100	10		4.80
23306	32	35	7.7	6.8	4.2	50	5		11.48
23307	40	42	9	8	5	48	2		18.36
23308	50	54	11.1	10	6.5	20	2		21.93
20309	65	76.1	16.7	15.9	10.6	10		1	71.53
20310	80	88.9	19.5	18.5	12.5	5		1	86.98
20311	100	108	24.1	23	15.5	5		1	118.90



- Bend 45° / 90° in the dimensions d76.1 / 88.9 / 108 with new masses as of 01.04.2017

Geberit Mapress Carbon Steel bend with plain ends 90°



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Carbon Steel → p. 102

Characteristics


- Outside zinc-plated

Technical data

Material	Non-alloy steel 1.0034 E195 (EN 10305)
----------	--

Art. no.	DN	d, ø [mm]	H [cm]	H1 [cm]	K [cm]	K1 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
20401	10	12	7	12	1.7	6.7	25	5		1.92
20402	12	15	7	12	2.2	7.2	100	20		2.36
20403	15	18	7	12	1.7	6.7	50	10		2.55
20404	20	22	7	12	0.9	5.9	50	10		2.55
20405	25	28	8	12	0.7	4.7	50	10		3.00
20406	32	35	12	20	3	11	25	5		7.00
20407	40	42	15	25	4.4	14.4		5	1	11.37
20408	50	54	20	30	6.5	16.5			1	14.38

Geberit Mapress Carbon Steel pipe bridge

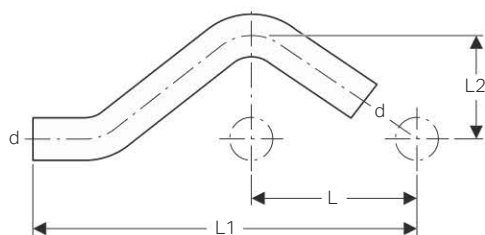

Application purposes

- For crossing parallel pipes with distance L
- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Carbon Steel → p. 102

Characteristics

- Outside zinc-plated


Technical data

Material	Non-alloy steel 1.0034 E195 (EN 10305)
----------	--

Art. no.	DN	d, ø [mm]	L [cm]	L1 [cm]	L2 [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
20801	10	12	5.5	15.4	2.9	25	5	2.59
20802	12	15	5.7	15.8	3	100	10	2.87
20803	15	18	6	16.6	3.1	50	10	3.13
20804	20	22	6.5	17.9	3.3	50	10	3.61
20805	25	28	7.3	20.6	3.6	50	10	4.44

2.2.7 T-pieces

Geberit Mapress Carbon Steel T-piece, equal



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Carbon Steel → p. 102


Characteristics

- Pressing indicator
- Leaky if unpressed
- Outside zinc-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Material		Non-alloy steel 1.0034 E195 (EN 10305)									
Art. no.	DN	d, \varnothing [mm]	L [cm]	L1 [cm]	I [cm]	Z [cm]	Z1 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
21001	10	12	5.6	3.5	2.8	1.1	1.8	50	10		4.48
21002	12	15	6.4	3.9	3.2	1.2	1.9	200	20		4.90
21003	15	18	6.8	4.1	3.4	1.4	2.1	100	20		5.27
21004	20	22	7.4	4.4	3.7	1.6	2.3	100	20		5.63
21005	25	28	8.4	5	4.2	1.9	2.7	50	10		7.57
21006	32	35	10	5.7	5	2.4	3.1	50	5		11.81
21007	40	42	11.4	6.5	5.7	2.7	3.5	48	4		17.42
21008	50	54	13.8	7.7	6.9	3.4	4.2	20	2		20.91
21012	65	66.7	22	10.5	11	6	5.5	5		1	84.52
21009	65	76.1	23	11	11.5	6.2	5.7	10		1	120.25
21010	80	88.9	26	12.8	13	7	6.8	5		1	138.97
21011	100	108	31	15.3	15.5	8	7.8	5		1	169.14

Geberit Mapress T-piece, reduced



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Carbon Steel → p. 102


Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Material		Brass CW617N														
Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	L [cm]	L1 [cm]	l [cm]	l2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.	
61191	12 / 10 / 10	15	12	12	6.4	3.3	3.2	3.2	1.2	1.6	1.5			1	5.23	
61192	15 / 12 / 12	18	15	15	7.4	3.5	3.4	4	1.4	1.5	2	25	5		5.76	
61193	15 / 15 / 12	18	18	15	7.4	3.4	3.4	4	1.4	1.4	2		5	1	5.76	
61194	20 / 12 / 12	22	15	15	7.7	3.8	3.4	4.3	1.3	1.8	2.3	25	5		7.13	
61195	20 / 15 / 15	22	18	18	7.4	4	3.7	3.7	1.6	2	1.7		5	1	7.13	
61196	20 / 20 / 12	22	22	15	8.3	3.7	3.7	4.6	1.6	1.6	2.6	25	5		7.13	
61197	25 / 20 / 20	28	22	22	8	4.1	4.2	3.8	1.9	2	1.7	25	5		8.65	

Geberit Mapress Carbon Steel T-piece, reduced



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Carbon Steel → p. 102

Characteristics


- Pressing indicator
- Leaky if unpressed
- Outside zinc-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Material		Non-alloy steel 1.0034 E195 (EN 10305)													
Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	L [cm]	L1 [cm]	l [cm]	l2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
21101	10 / 12 / 10	12	15	12	5.6	3.5	2.8	2.8	1.1	1.5	1.1		5	1	4.85
21201	12 / 10 / 10	15	12	12	7.2	3.6	3.2	4	1.2	1.9	2.3		5		4.85
21202	12 / 10 / 12	15	12	15	6.4	3.6	3.2	3.2	1.2	1.9	1.2	50	10		4.85
21103	12 / 15 / 12	15	18	15	6.4	3.6	3.2	3.2	1.2	1.6	1.2	50	10		5.15
21104	12 / 20 / 12	15	22	15	6.4	4.2	3.2	3.2	1.2	2.1	1.2	50	10		5.38
21203	15 / 10 / 15	18	12	18	6.8	3.8	3.4	3.4	1.4	2.1	1.4	50	10		5.15
21204	15 / 12 / 15	18	15	18	6.8	4.2	3.4	3.4	1.4	2.2	1.4	100	20		5.15
21105	15 / 20 / 15	18	22	18	6.8	4.1	3.4	3.4	1.4	2	1.4	25	5		5.38
21205	20 / 10 / 20	22	12	22	7.4	4	3.7	3.7	1.6	2.3	1.6	50	10		5.38

Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	L [cm]	L1 [cm]	l [cm]	l2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
21206	20 / 12 / 20	22	15	22	7.4	4.4	3.7	3.7	1.6	2.4	1.6	100	20		5.38
21207	20 / 15 / 20	22	18	22	7.4	4.4	3.7	3.7	1.6	2.4	1.6	100	20		5.38
21107	20 / 25 / 20	22	28	22	7.4	4.5	3.7	3.7	1.6	2.2	1.6	25	5		7.61
21209	25 / 12 / 25	28	15	28	8.4	4.7	4.2	4.2	1.9	2.7	1.9	100	10		7.61
21210	25 / 15 / 25	28	18	28	8.4	4.7	4.2	4.2	1.9	2.7	1.9	100	10		7.61
21211	25 / 20 / 25	28	22	28	8.4	4.8	4.2	4.2	1.9	2.7	1.9	100	10		7.61
21212	32 / 12 / 32	35	15	35	10	5.1	5	5	2.4	3.1	2.4	50	5		11.43
21213	32 / 15 / 32	35	18	35	10	5.1	5	5	2.4	3.1	2.4	50	5		11.43
21214	32 / 20 / 32	35	22	35	10	5.2	5	5	2.4	3.1	2.4	50	5		11.43
21215	32 / 25 / 32	35	28	35	10	5.5	5	5	2.4	3.2	2.4	50	5		11.43
21216	40 / 12 / 40	42	15	42	11.4	5.3	5.7	5.7	2.7	3.3	2.7	48	4		15.97
21217	40 / 15 / 40	42	18	42	11.4	5.3	5.7	5.7	2.7	3.3	2.7	48	4		15.97
21218	40 / 20 / 40	42	22	42	11.4	5.5	5.7	5.7	2.7	3.4	2.7	48	4		15.97
21219	40 / 25 / 40	42	28	42	11.4	5.8	5.7	5.7	2.7	3.5	2.7	48	4		15.97
21220	40 / 32 / 40	42	35	42	11.4	6.1	5.7	5.7	2.7	3.5	2.7	48	4		15.97
21221	50 / 12 / 50	54	15	54	13.8	5.9	6.9	6.9	3.4	3.9	3.4	24	4		19.51
21222	50 / 15 / 50	54	18	54	13.8	5.9	6.9	6.9	3.4	3.9	3.4	40	2		19.53
21223	50 / 20 / 50	54	22	54	13.8	6.1	6.9	6.9	3.4	4	3.4	40	2		19.51
21224	50 / 25 / 50	54	28	54	13.8	6.4	6.9	6.9	3.4	4.1	3.4	30	2		19.51
21225	50 / 32 / 50	54	35	54	13.8	6.8	6.9	6.9	3.4	4.2	3.4	24	2		19.51
21226	50 / 40 / 50	54	42	54	13.8	7.2	6.9	6.9	3.4	4.2	3.4	30	2		19.51
21229	65 / 50 / 65	66.7	54	66.7	22	8.2	11	11	6	4.7	6	5		1	84.52
21230	65 / 25 / 65	76.1	28	76.1	23	7.9	11.5	11.5	6.2	5.6	6.2	10		1	120.29
21231	65 / 32 / 65	76.1	35	76.1	23	8.1	11.5	11.5	6.2	5.5	6.2	5		1	120.29
21232	65 / 40 / 65	76.1	42	76.1	23	8.1	11.5	11.5	6.2	5.1	6.2	5		1	120.29
21233	65 / 50 / 65	76.1	54	76.1	23	8.7	11.5	11.5	6.2	5.2	6.2	10		1	120.29
21234	65 / 65 / 65	76.1	66.7	76.1	23	10.8	11.5	11.5	6.5	5.8	6.5			1	120.29
21237	80 / 25 / 80	88.9	28	88.9	26	8.7	13	13	7	6.4	7	5		1	135.02
21238	80 / 32 / 80	88.9	35	88.9	26	9	13	13	7	6.4	7	5		1	135.02
21239	80 / 40 / 80	88.9	42	88.9	26	9.2	13	13	7	6.2	7	5		1	135.02
21240	80 / 50 / 80	88.9	54	88.9	26	9.3	13	13	7	5.8	7	5		1	135.02
21241	80 / 65 / 80	88.9	76.1	88.9	26	11.4	13	13	7	6.1	7	5		1	135.02
21245	100 / 25 / 100	108	28	108	31	10.5	15.5	15.5	8	8.2	8	5		1	159.57
21246	100 / 32 / 100	108	35	108	31	10.8	15.5	15.5	8	8.2	8	5		1	159.57
21247	100 / 40 / 100	108	42	108	31	11	15.5	15.5	8	8	8	5		1	159.57
21248	100 / 50 / 100	108	54	108	31	11.3	15.5	15.5	8	7.8	8	5		1	159.57
21249	100 / 65 / 100	108	76.1	108	31	12.4	15.5	15.5	8	7.1	8	5		1	159.57
21250	100 / 80 / 100	108	88.9	108	31	13.5	15.5	15.5	8	7.5	8			1	159.57

Geberit Mapress Carbon Steel T-piece with female thread



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Carbon Steel → p. 102

Characteristics


- Pressing indicator
- Leaky if unpressed
- Outside zinc-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Material	Non-alloy steel 1.0034 E195 (EN 10305)
----------	--

Art. no.	DN	d, ø [mm]	Rp ["]	d1, ø [mm]	L [cm]	L1 [cm]	l [cm]	l2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
21301	10	12	3/8	12	5.6	3.3	2.8	2.8	1.1	2.3	1.1			1	11.28
21302	10 / 15 / 10	12	1/2	12	5.6	3.6	2.8	2.8	1.1	2.3	1.1		5	1	11.28
21304	12 / 15 / 12	15	1/2	15	6.4	3.7	3.2	3.2	1.2	2.4	1.2	100	20		7.01
21305	15	18	1/2	18	6.8	3.9	3.4	3.4	1.4	2.6	1.4	100	20		7.01
21307	20 / 15 / 20	22	1/2	22	7.4	4	3.7	3.7	1.6	2.7	1.6	100	20		7.69
21308	20 / 20 / 20	22	3/4	22	7.4	4.4	3.7	3.7	1.6	2.8	1.6	25	5		7.69
21309	25 / 15 / 25	28	1/2	28	8.4	4.4	4.2	4.2	1.9	3.1	1.9	50	10		8.94
21310	25 / 20 / 25	28	3/4	28	8.4	4.7	4.2	4.2	1.9	3.2	1.9	50	10		8.94
21311	25	28	1	28	8.4	5.3	4.2	4.2	1.9	3.6	1.9		5	1	8.94
21312	32 / 15 / 32	35	1/2	35	10	4.8	5	5	2.4	3.5	2.4	50	5		12.32
21313	32 / 20 / 32	35	3/4	35	10	5.1	5	5	2.4	3.6	2.4	50	5		12.32
21314	32 / 25 / 32	35	1	35	10	5.6	5	5	2.4	3.9	2.4		5	1	12.32
21316	40 / 15 / 40	42	1/2	42	11.4	5.1	5.7	5.7	2.7	3.8	2.7	48	4		19.71
21317	40 / 20 / 40	42	3/4	42	11.4	5.4	5.7	5.7	2.7	3.9	2.7	48	4		19.71
21318	40 / 25 / 40	42	1	42	11.4	6	5.7	5.7	2.7	4.3	2.7		5	1	19.71
21320	50 / 15 / 50	54	1/2	54	13.8	5.7	6.9	6.9	3.4	4.4	3.4	20	2		20.89
21321	50 / 20 / 50	54	3/4	54	13.8	6	6.9	6.9	3.4	4.5	3.4	20	2		24.84
21322	50 / 25 / 50	54	1	54	13.8	6.6	6.9	6.9	3.4	4.9	3.4		5	1	24.84
21324	50	54	2	54	13.8	7.9	6.9	6.9	3.4	5.6	3.4	5		1	24.84
21325	65 / 20 / 65	66.7	3/4	66.7	22	6.4	11	11	6	4.9	6	5		1	70.99
21326	65 / 20 / 65	76.1	3/4	76.1	23	7.9	11.5	11.5	6.2	6.4	6.2	10		1	105.58
21329	65 / 50 / 65	76.1	2	76.1	23	8.9	11.5	11.5	6.2	6.6	6.2			1	105.58
21331	80 / 20 / 80	88.9	3/4	88.9	26	8.8	13	13	7	7.3	7	5		1	114.53
21334	80 / 50 / 80	88.9	2	88.9	26	9.6	13	13	7	7.3	7			1	114.53
21336	100 / 20 / 100	108	3/4	108	31	10.5	15.5	15.5	8	9	8	5		1	137.82

Geberit Mapress Carbon Steel T-piece with female thread and plain ends



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Carbon Steel → p. 102

Characteristics

- Outside zinc-plated


Technical data

Material	Non-alloy steel 1.0034 E195 (EN 10305)
----------	--

Art. no.	DN	d, ø [mm]	Rp ["]	d1, ø [mm]	H [cm]	H1 [cm]	L [cm]	L1 [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
21341	15	18	1/2	18	5	5	10	3.4	2.1	25	5	5.83
21342	20 / 15 / 20	22	1/2	22	5	5	10	3.6	2.3	50	10	6.36
21343	25 / 15 / 25	28	1/2	28	5	5	10	4.3	3	50	10	7.42
21344	32 / 15 / 32	35	1/2	35	5.7	5.7	11.4	4.7	3.4	50	10	10.28
21345	40 / 15 / 40	42	1/2	42	6.7	6.7	13.4	5	3.7	50	10	16.01
21346	50 / 15 / 50	54	1/2	54	7.3	7.3	14.6	5.7	4.4	25	5	17.28

2.2.8 Pipe crosses

Geberit Mapress Carbon Steel pipe cross, reduced



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Carbon Steel → p. 102

Characteristics


- Pressing indicator
- Leaky if unpressed
- Outside zinc-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Material	Non-alloy steel 1.0034 E195 (EN 10305)
----------	--

Art. no.	DN	d, ø [mm]	d1, ø [mm]	L [cm]	L1 [cm]	l [cm]	l1 [cm]	Z [cm]	Z1 [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
21120	32 / 25	35	28	10	11	5	5.5	2.4	3.2	5	1	23.85
21121	40 / 25	42	28	11.4	11.6	5.7	5.8	2.7	3.5	5	1	26.42
21122	50 / 25	54	28	13.8	12.8	6.9	6.4	3.4	4.1		1	29.61
21123	50 / 32	54	35	13.8	13.6	6.9	6.8	3.4	4.2		1	29.61
21127	65 / 25	76.1	28	23	15.8	11.5	7.9	6.2	5.6		1	181.86
21128	65 / 32	76.1	35	23	16.2	11.5	8.1	6.2	5.5		1	180.20
21130	80 / 25	88.9	28	26	17.4	13	8.7	7	6.4		1	203.59
21131	80 / 32	88.9	35	26	18	13	9	7	6.4		1	203.59
21133	100 / 25	108	28	31	20	15.5	10	8	7.7		1	251.72
21134	100 / 32	108	35	31	20	15.5	10	8	7.4		1	251.72

Geberit Mapress Carbon Steel pipe cross 30°, reduced

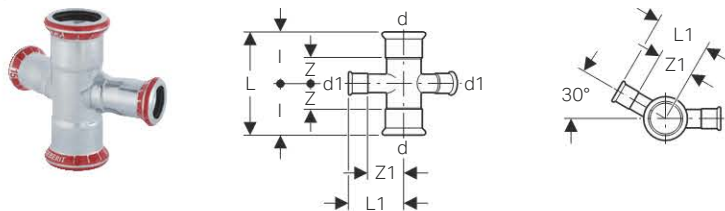

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Carbon Steel → p. 102

Characteristics


- Pressing indicator
- Leaky if unpressed
- Outside zinc-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Material	Non-alloy steel 1.0034 E195 (EN 10305)
----------	--

Art. no.	DN	d, ø [mm]	d1, ø [mm]	L [cm]	L1 [cm]	l [cm]	Z [cm]	Z1 [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
21404	15 / 12	18	15	6.8	4	3.4	1.4	2	5	1	13.74
21406	20 / 12	22	15	7.4	4.2	3.7	1.6	2.2	5	1	14.21
21409	25 / 12	28	15	8.4	4.5	4.2	1.9	2.5		1	16.11

Geberit Mapress Carbon Steel pipe cross, reduced, offset

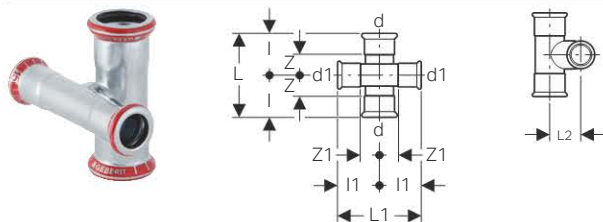

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Carbon Steel → p. 102

Characteristics

- Pressing indicator
- Leaky if unpressed
- Outside zinc-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug


Technical data

Material	Non-alloy steel 1.0034 E195 (EN 10305)
----------	--

Art. no.	DN	d, ø [mm]	d1, ø [mm]	L [cm]	L1 [cm]	L2 [cm]	l [cm]	l1 [cm]	Z [cm]	Z1 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
21504	12	15	15	6.4	6.4	2	3.2	3.2	1.2	1.2	25	5		15.17
21505	15 / 12	18	15	8.4	6.8	2.5	4.2	3.4	2.2	1.4	25	5		16.83
21506	20 / 12	22	15	8.4	7.4	2.7	4.2	3.7	2.2	1.6	25	5		17.73
21509	20 / 15	22	18	8.4	7.4	2.8	4.2	3.7	2.2	1.6		5	1	17.96
21507	25 / 12	28	15	8.4	8.4	2.9	4.2	4.2	2.2	1.9		5	1	18.77
21510	25 / 15	28	18	8.4	8.4	3.2	4.2	4.2	2.2	1.9		5	1	19.06
21512	25 / 20	28	22	8.4	8.4	3.3	4.2	4.2	2.1	1.9			1	20.20

2.2.9 Adaptors, permanent

Geberit Mepla adaptor to Geberit Mapress, with plain end



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Carbon Steel → p. 102

Characteristics


- Leaky if unpressed
- O-ring made of EPDM
- Pressing nipple with transparent protective cap

Technical data

Material	Gunmetal (CuSn5Zn5Pb2-C)
----------	--------------------------

Art. no.	DN	d, ø [mm]	d1, ø [mm]	L [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
601.508.00.5	12	16	15	5.9	1.2		50	10		7.78
602.507.00.5	15	20	15	6.1	1.1		50	10	1	7.78
602.508.00.5	15	20	18	6.1	1.2		50	10		7.78
602.509.00.5	15	20	22	6.2	1.2		50	10	1	7.78
603.508.00.5	20	26	22	6.7	1.2		25	5		12.12
604.508.00.5	25	32	28	6.6	1.3		25	5		13.73
605.508.00.5	32	40	35	7.5	1.3		25	5		17.15
606.508.00.5	40	50	42	10.1	3.1	480	10	2		33.89
607.508.00.5	50	63	54	13.6	3.2	180	10		1	52.19

Geberit Mapress Carbon Steel adaptor with plain and welding end



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Carbon Steel → p. 102

Characteristics


- Not zinc-plated

Technical data

Material	Non-alloy steel 1.0034 E195 (EN 10305)
----------	--

Art. no.	DN	d, ø [mm]	d1, ø [mm]	s [mm]	s1 [mm]	H [cm]	h [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
12412	12	15	17.2	1.2	2.3	12	3	25	5		4.52
12413	15	18	21.3	1.2	2.9	12	3	25	5		4.65
12414	20	22	26.9	1.5	4	12	3.4	25	5		5.06
12415	25	28	33.7	1.5	4.4	12	3.4	25	5		6.52
12416	32	35	42.4	1.5	5.2	12	4	25	5		7.18
12417	40	42	48.3	1.5	4.7	12	4.5	24	4		9.18
12418	50	54	60.3	1.5	4.7	12	5	24	4		11.31
12419	65	76.1	76.1	2	3.7	12	7	5		1	13.83
12420	80	88.9	88.9	2	4.1	12	7.5	5		1	17.30
12421	100	108	114.3	2	5.2	12	9	5		1	21.04

Geberit Mapress Carbon Steel adaptor with male thread



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Carbon Steel → p. 102

Characteristics

- Pressing indicator
- Leaky if unpressed
- Outside zinc-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Material	Non-alloy steel 1.0034 E195 (EN 10305)
----------	--

Art. no.	DN	d, ø [mm]	R ["]	H [cm]	L [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
21701	10	12	3/8	1.6	3.3	50	10		5.04
21700	10 / 15	12	1/2	2.2	3.6	25	5		5.04
21702	12 / 10	15	3/8	1.8	3.8	100	20		5.04
21703	12 / 15	15	1/2	2.1	4.1	200	20		5.04
21714	12 / 20	15	3/4	2.6	4.3	50	10		5.04
21704	15	18	1/2	2.2	4.2	200	20		5.70
21705	15 / 20	18	3/4	2.4	4.4	100	20		5.70
21715	20 / 15	22	1/2	2.2	4	100	20		5.91
21707	20	22	3/4	2.3	4.4	100	20		5.91
21716	20 / 25	22	1	2.6	4.6	100	20		5.91
21717	25 / 20	28	3/4	2.6	4.6	100	20		5.70
21708	25	28	1	2.5	4.8	100	20		8.35
21727	25 / 32	28	1 1/4	2.8	4.8	50	10		8.35
21719	32 / 25	35	1	2.5	5.1	50	5		10.74
21709	32	35	1 1/4	2.7	5.3	50	5		10.74
21720	32 / 40	35	1 1/2	3	5.3	50	5		10.74
21710	40	42	1 1/2	2.7	5.7	48	4		12.31
21722	50 / 40	54	1 1/2	3.6	7.1		5	1	18.56
21711	50	54	2	3.6	7.1	24	4		18.56
21712	65	66.7	2 1/2	4	11.8	5		1	27.10
21713	65	76.1	2 1/2	4.3	11.9	15		1	26.08
21724	80	88.9	3	5	13.7	5		1	34.06
21725	100	108	4	6.1	16	5		1	44.72

Geberit Mapress Carbon Steel adaptor with male thread and plain end



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Carbon Steel → p. 102

Characteristics


- Outside zinc-plated

Technical data

Material	Non-alloy steel 1.0034 E195 (EN 10305)
----------	--

Art. no.	DN	d, \varnothing [mm]	R ["]	H [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
21930	10	12	3/8	4.8			1	5.04
21931	10 / 15	12	1/2	5.5			1	5.04
21932	12 / 15	15	1/2	5.7	50	10		5.04
21933	15	18	1/2	5.7	50	5		5.70
21934	15 / 20	18	3/4	5.9		5	1	5.70
21935	20 / 15	22	1/2	5.7	50	5		5.91
21936	20	22	3/4	5.9	50	10		5.91
21937	25	28	1	6.6	50	10		7.95
21938	32	35	1 1/4	8		5	1	10.22
21939	40	42	1 1/2	9.1			1	11.71
21940	50	54	2	10.2		5	1	17.68

Geberit Mapress Carbon Steel adaptor with female thread



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Carbon Steel → p. 102

- Outside zinc-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Characteristics


- Pressing indicator
- Leaky if unpressed

Technical data

Material	Non-alloy steel 1.0034 E195 (EN 10305)
----------	--

Art. no.	DN	d, \varnothing [mm]	Rp ["]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
21800	10	12	3/8	3.1	0.3		5	1	5.04
21801	10 / 15	12	1/2	3.4	0.4	25	5		5.04
21827	12 / 10	15	3/8	3.3	0.3	50	10		5.04
21802	12 / 15	15	1/2	3.7	0.4	200	20		5.04
21823	12 / 20	15	3/4	3.8	0.7	25	5		5.04
21803	15	18	1/2	3.7	0.4	200	20		5.70
21804	15 / 20	18	3/4	3.8	0.3	50	10		5.70
21805	20	22	1/2	3.8	0.3	100	20		5.91
21806	20	22	3/4	3.9	0.3	100	20		5.91
21824	20	22	1	4.2	0.4	50	10		5.91
21807	25 / 15	28	1/2	3.8	0.2	50	10		8.35
21808	25	28	3/4	3.8	0.1	50	10		8.35
21809	25	28	1	4.4	0.4	50	10		8.35
21810	32	35	3/4	4.2	0.1	25	5		10.74
21820	32 / 25	35	1	4.5	0.2	50	5		10.74
21811	32	35	1 1/4	4.9	0.4	50	5		10.74
21814	40	42	1 1/2	5.3	0.4	48	4		12.31
21818	50	54	2	6.2	0.5	24	4		18.56

Geberit Mapress Carbon Steel adaptor with female thread and plain end



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Carbon Steel → p. 102

Characteristics


- Outside zinc-plated

Technical data

Material	Non-alloy steel 1.0034 E195 (EN 10305)
----------	--

Art. no.	DN	d, ø [mm]	Rp ["]	H [cm]	L [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
21907	10	12	3/8	4.4	5.4			1	5.04
21901	10 / 15	12	1/2	4.5	5.8		5	1	5.04
21908	12 / 10	15	3/8	6	7.4		5	1	4.79
21902	12 / 15	15	1/2	4.8	6.1	50	10		5.04
21903	15	18	1/2	4.8	6.1	50	10		5.52
21904	15 / 20	18	3/4	4.9	6.4			1	5.52
21905	20 / 15	22	1/2	4.9	6.2	100	20		5.88
21906	20	22	3/4	5	6.5	25	5		5.88
21910	25 / 15	28	1/2	4.9	7.4		5	1	7.03
21912	32 / 15	35	1/2	5.2	7.7		5	1	10.22
21914	40 / 15	42	1/2	5.7	8.1			1	11.93
21916	50 / 15	54	1/2	6.2	8.6			1	15.34
21918	65 / 15	76.1	1/2	8.7	10.5			1	39.61
21920	80 / 15	88.9	1/2	10.2	11.5			1	52.82
21922	100 / 15	108	1/2	11.4	12.7			1	77.52

Geberit Mapress Carbon Steel elbow adaptor 90° with male thread



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Carbon Steel → p. 102

Characteristics


- Pressing indicator
- Leaky if unpressed
- Outside zinc-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Material	Non-alloy steel 1.0034 E195 (EN 10305)
----------	--

Art. no.	DN	d, ø [mm]	R ["]	H [cm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
21611	10	12	3/8	2.5	3.2	1.5		5	1	5.04
21612	12 / 10	15	3/8	2.6	3.6	1.6		5	1	5.57
21613	12 / 15	15	1/2	3.1	3.5	1.5	100	20		5.57
21615	15	18	1/2	3.1	3.7	1.7	50	10		5.88
21618	20	22	3/4	3.5	4.1	2	25	5		7.95
21609	25 / 20	28	3/4	5	5.8	3.5		5	1	13.58
21610	25	28	1	5.4	5.8	3.5		5	1	12.93

Geberit Mapress Carbon Steel elbow adaptor 90° with female thread



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Carbon Steel → p. 102

Characteristics


- Pressing indicator
- Leaky if unpressed
- Outside zinc-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Material	Non-alloy steel 1.0034 E195 (EN 10305)
----------	--

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	L1 [cm]	Z [cm]	Z1 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
21659	20 / 15	22	1/2	4.2	4	2.1	2.7		5	1	8.95
21660	25 / 15	28	1/2	4.7	4.4	2.4	3.1	50	5		11.41
21661	25	28	3/4	5.8	5	3.5	3.5		5	1	12.93
21662	25	28	1	5.8	5.4	3.5	3.6		5	1	12.93

Geberit Mapress Carbon Steel bend adaptor 90° with male thread



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Carbon Steel → p. 102

Characteristics

- Pressing indicator
- Leaky if unpressed
- Outside zinc-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Material	Non-alloy steel 1.0034 E195 (EN 10305)
----------	--


Art. no.	DN	d, ø [mm]	R ["]	H [cm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
20501	10	12	3/8	3.4	4.2	2.5	25	5		6.00
20502	12 / 10	15	3/8	3.7	4.9	2.9	50	10		6.44
20503	12 / 15	15	1/2	4	4.9	2.9	100	20		6.70
20505	15	18	1/2	4.7	5.3	3.3	50	10		7.26
20507	20	22	3/4	5.4	6.1	4	50	10		8.96
20508	25	28	1	6.6	7.2	4.9	50	10		11.41
23509	32	35	1 1/4	10.2	6.8	4.2	25	5		16.95
23510	40	42	1 1/2	11.6	8	5		5	1	29.82
23511	50	54	2	14.2	10	6.5		5	1	40.75

Geberit Mapress Carbon Steel

Geberit Mapress Carbon Steel

Adaptors and connections, detachable

Geberit Mapress Carbon Steel bend adaptor 90° with female thread

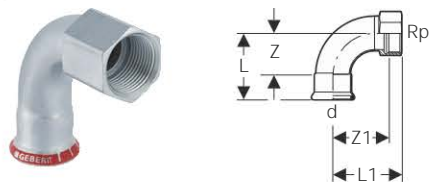

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Carbon Steel → p. 102

Characteristics

- Pressing indicator
- Leaky if unpressed
- Outside zinc-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Material	Non-alloy steel 1.0034 E195 (EN 10305)
----------	--

Art. no.	DN	d, ø [mm]	Rp [""]	L [cm]	L1 [cm]	Z [cm]	Z1 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
20551	10	12	3/8	4.2	4.1	2.5	3			1	6.00
20552	12 / 10	15	3/8	4.9	4.5	2.9	3.4		5	1	6.44
20553	12 / 15	15	1/2	4.9	4.8	2.9	3.3	50	5		6.70
20555	15	18	1/2	5.3	5.2	3.3	3.7	50	5		7.26
20557	20	22	3/4	6.1	6	4	4.4	25	5		8.96
20558	25 / 15	28	1/2	7.2	6.5	4.9	5		5	1	11.41
20559	25	28	1	7.2	6.6	4.9	4.7	25	5		12.93
20560	32	35	1 1/4	6.8	7.5	4.2	5.4		5	1	17.49
20561	40	42	1 1/2	8	8.4	5	6.3			1	30.77
20562	50	54	2	10	10.4	6.5	7.8			1	39.24

2.2.10 Adaptors and connections, detachable

Geberit Mapress Carbon Steel union



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Carbon Steel → p. 102

- Seal ring made of CIIR, black
- Flat gasket made of EPDM
- Pressing socket with transparent protection plug

Characteristics


- Pressing indicator
- Leaky if unpressed
- Outside zinc-plated
- Union nut made of brass

Technical data

Media temperature with flat gasket EPDM	0–100 °C
Material	Non-alloy steel 1.0034 E195 (EN 10305)

Art. no.	DN	d, ø [mm]	G [""]	L [cm]	Z [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
25319	10	12	1/2	5.8	2.1		1	14.37
25320	12	15	3/4	6.6	2.6		5	13.93
25321	15	18	3/4	6.9	2.9		5	15.87
25322	20	22	1	7.2	3		5	19.65
25323	25	28	1 1/4	7.7	3.1		5	32.67
25324	32	35	1 1/2	8.2	3		5	44.94
25325	40	42	1 3/4	9.5	3.5		5	64.69
25326	50	54	2 3/8	11.3	4.3		5	107.37

Geberit Mapress Carbon Steel adaptor union with male thread



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Carbon Steel → p. 102

Characteristics

- Pressing indicator
- Leaky if unpressed
- Outside zinc-plated
- Union nut made of brass


- Adaptor made of gunmetal
- Seal ring made of CIIR, black
- Flat gasket made of EPDM
- Pressing socket with transparent protection plug

Technical data

Media temperature with flat gasket EPDM	0–100 °C
Material	Non-alloy steel 1.0034 E195 (EN 10305)

Art. no.	DN	d, ø [mm]	R ["]	G ["]	H [cm]	L [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
25330	12 / 15	15	1/2	3/4	4.1	6.1	50	10		7.01
25332	15	18	1/2	3/4	4.1	6.1	50	10		7.94
25335	20	22	3/4	1	4.7	6.8	50	2		10.31
25329	20 / 25	22	1	1	4.8	6.9	25	5		9.83
25337	25	28	1	1 1/4	5.2	7.5	40	2		16.36
25338	32	35	1 1/4	1 1/2	5.4	8	20	2		22.30
25339	40	42	1 1/2	1 3/4	5.5	8.5	20	2		33.85
25340	50	54	2	2 3/8	6.2	9.7	15		1	77.27

Geberit Mapress Carbon Steel adaptor union with female thread



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Carbon Steel → p. 102

Characteristics

- Pressing indicator
- Leaky if unpressed
- Outside zinc-plated
- Union nut made of brass

- Adaptor made of gunmetal
- Seal ring made of CIIR, black
- Flat gasket made of EPDM
- Pressing socket with transparent protection plug

Technical data


Media temperature with flat gasket EPDM	0–100 °C
Material	Non-alloy steel 1.0034 E195 (EN 10305)

Art. no.	DN	d, ø [mm]	Rp ["]	G ["]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
25300	12	15	1/2	3/4	5.8	2.3	25	5		7.50
25302	15	18	1/2	3/4	5.8	2.3	50	5		8.16
25304	20	22	3/4	1	6.3	2.3	50	5		11.17
25305	20 / 25	22	1	1	6.6	3		5	1	10.65
25306	25	28	1	1 1/4	7.1	3.3	50	5		16.51
25307	32	35	1 1/4	1 1/2	7.7	3.5	25		1	23.70
25308	40	42	1 1/2	1 3/4	8.2	3.1		5	1	34.50
25309	50	54	2	2 3/8	9.5	3.4		5	1	77.07

Geberit Mapress Carbon Steel

Geberit Mapress Carbon Steel
Adaptors and connections, detachable

Geberit Mapress Carbon Steel connector with union nut



Application purposes

- For connecting radiators and radiator valves
- Suitable exclusively for threads with an inner diameter of $\leq di$
- For heating and cooling
- Application overview: Geberit Mapress Carbon Steel → p. 102

Characteristics

- Pressing indicator
- Leaky if unpressed
- Outside zinc-plated


- Union nut made of brass, nickel-plated
- Seal ring made of CIIR, black
- Flat gasket made of EPDM
- Pressing socket with transparent protection plug

Technical data

Media temperature with flat gasket EPDM	0–100 °C
Material	Non-alloy steel 1.0034 E195 (EN 10305)

Art. no.	DN	d, \emptyset [mm]	G ["]	di, \emptyset [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
25042	12	15	1/2	10	5.1	2.5	25	5	4.06
25048	15	18	1/2	10	5.3	2.6	25	5	4.12
25049	20	22	3/4	13	5.4	2.7	50	10	5.84

Geberit Mapress adaptor union with clamping ring for corrugated pipes, NPW, plain end



Application purposes


- For heating water
- For cooling water without antifreeze agent
- For cooling water with antifreeze agent
- Only suitable for liquid media

Technical data

Material	DR brass CW602N
----------	-----------------

Art. no.	DN	DN	d, \emptyset [mm]	L [cm]	PN [bar]	SU2 [pc.]	GBP/pc.
22421	12	16	15	6.4	10	2	12.91
22431	12	20	15	6.7	10	2	15.06
22422	15	16	18	6.4	10	2	13.99
22432	15	20	18	6.7	10	2	16.14
22423	20	16	22	6.8	10	2	15.06
22433	20	20	22	6.8	10	2	17.20
22444	25	25	28	6.8	10	2	23.66

Geberit Mapress Carbon Steel flange PN 6, with pressing socket

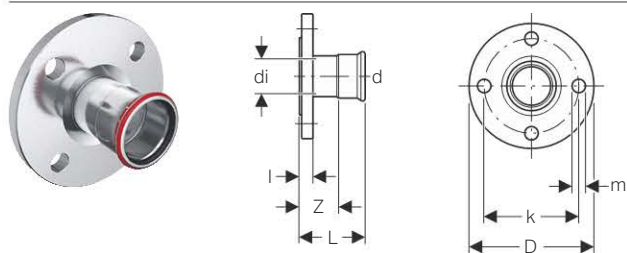

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Carbon Steel → p. 102

Characteristics

- Pressing indicator
- Leaky if unpressed
- Outside zinc-plated

- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug
- Design B1 (raised sealing strip with standard sealing strip), EN 1092-1

Technical data


Material	Non-alloy steel 1.0034 E195 (EN 10305)
----------	--

Art. no.	DN	d, ø [mm]	di, ø [mm]	D [cm]	k [mm]	m [mm]	L [cm]	l [cm]	Z [cm]	n [pc.]	PN [bar]	SU1 [pc.]	GBP/pc.
23744	20	22	19	9	65	11	6.1	1.4	4	4	6	1	37.27
23745	25	28	25	10	75	11	6.5	1.4	4.2	4	6	1	46.58
23746	32	35	32	12	90	14	6.8	1.4	4.2	4	6	1	59.89
23747	40	42	39	13	100	14	7.5	1.4	4.5	4	6	1	74.53
23748	50	54	51	14	110	14	8.3	1.4	4.8	4	6	1	93.14
23749	65	76.1	72	16	130	14	11.4	1.4	6.1	4	6	1	119.78
23750	80	88.9	84.8	19	150	18	12.1	1.6	6.1	4	6	1	146.40
23751	100	108	103.9	21	170	18	12.6	1.6	5.1	4	6	1	172.99

Accessories

- Geberit flange gasket PN 6 → p. 95
- Geberit bolt set for flange connection, made of steel zinc-plated → p. 152
- Geberit bolt set for flange connection, made of CrNi steel → p. 96

Geberit Mapress Carbon Steel flange PN 10/16, with pressing socket

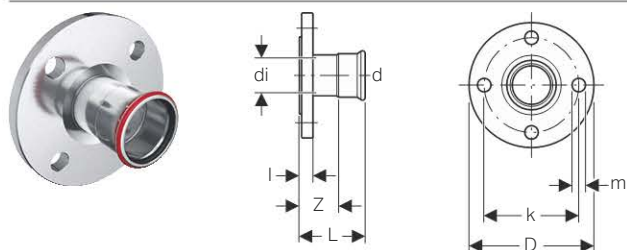

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Carbon Steel → p. 102

Characteristics

- Pressing indicator
- Leaky if unpressed
- Outside zinc-plated

- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug
- Design B1 (raised sealing strip with standard sealing strip), EN 1092-1

Technical data

Material	Non-alloy steel 1.0034 E195 (EN 10305)
----------	--

Art. no.	DN	d, ø [mm]	di, ø [mm]	D [cm]	k [mm]	m [mm]	L [cm]	l [cm]	Z [cm]	n [pc.]	PN [bar]	SU1 [pc.]	GBP/pc.
23754	20	22	19	10.5	75	14	6.5	1.8	4.4	4	10 / 16	1	31.17
23755	25	28	25	11.5	85	14	6.9	1.8	4.6	4	10 / 16	1	37.51
23756	32	35	32	14	100	18	7.2	1.8	4.6	4	10 / 16	1	55.77
23757	40	42	39	15	110	18	7.9	1.8	4.9	4	10 / 16	1	64.13
23758	50	54	51	16.5	125	18	8.7	1.8	5.2	4	10 / 16	1	81.98
23762	65	66.7	63.1	18.5	145	18	11.8	1.8	6.8	4	10 / 16	1	90.33
23759	65	76.1	72	18.5	145	18	11.8	1.8	6.5	4	10 / 16	1	121.14
23760	80	88.9	84.8	20	160	18	12.5	2	6.5	8	10 / 16	1	143.96
23761	100	108	103.9	22	180	18	13	2	5.5	8	10 / 16	1	170.89

Accessories


- Geberit flange gasket PN 10/16 → p. 95
- Geberit bolt set for flange connection, made of steel zinc-plated → p. 152
- Geberit bolt set for flange connection, made of CrNi steel → p. 96

Geberit Mapress Carbon Steel

Geberit Mapress Carbon Steel

Adaptors and connections, detachable

Geberit Mapress Carbon Steel flange PN 6, with plain end

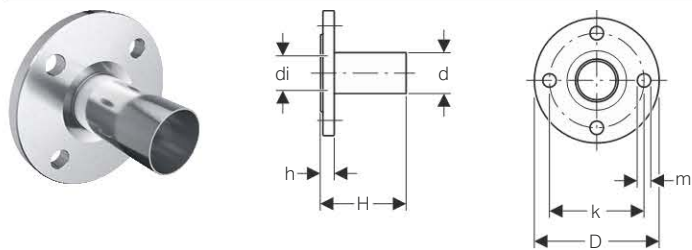

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Carbon Steel → p. 102

Characteristics

- Outside zinc-plated
- Design B1 (raised sealing strip with standard sealing strip), EN 1092-1

Technical data

Material	Non-alloy steel 1.0034 E195 (EN 10305)
----------	--


Art. no.	DN	d, ø [mm]	d _i , ø [mm]	D [cm]	k [mm]	m [mm]	H [cm]	h [cm]	n [pc.]	PN [bar]	SU1 [pc.]	GBP/pc.
23764	20	22	19	9	65	11	7.5	1.4	4	6	1	35.49
23765	25	28	25	10	75	11	7.7	1.4	4	6	1	44.35
23766	32	35	32	12	90	14	8.6	1.4	4	6	1	59.89
23767	40	42	39	13	100	14	10.4	1.4	4	6	1	70.99
23768	50	54	51	14	110	14	10.9	1.4	4	6	1	93.14
23769	65	76.1	72	16	130	14	13.2	1.4	4	6	1	119.78
23770	80	88.9	84.8	19	150	18	14.8	1.6	4	6	1	146.40
23771	100	108	103.9	21	170	18	16.1	1.6	4	6	1	172.99

Accessories

- Geberit flange gasket PN 6 → p. 95
- Geberit bolt set for flange connection, made of steel zinc-plated → p. 152
- Geberit bolt set for flange connection, made of CrNi steel → p. 96

2.2.11 Compensators

Geberit Mapress Carbon Steel axial expansion fitting with pressing sockets

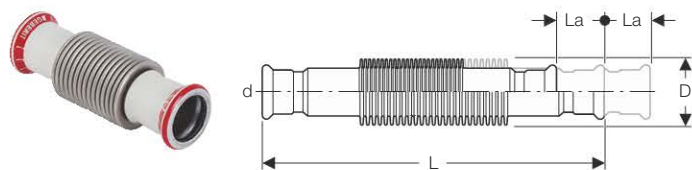

Application purposes

- For heating water
- For cooling water without antifreeze agent
- For cooling water with antifreeze agent
- For remote network heating water $\leq 120\text{ }^{\circ}\text{C}$
- For technical building systems, industry and shipbuilding
- Exclusively for absorption of axial linear expansion during operation

Characteristics

- Pressing indicator
- Leaky if unpressed
- White exterior
- Bellows made of stainless steel
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Material		Non-alloy steel 1.0034 E195 (EN 10305)					
Art. no.	DN	d, \varnothing [mm]	D [cm]	La [cm]	L [cm]	SU1 [pc.]	GBP/pc.
23932	12	15	2.6	+/- 0.7	15.1	1	87.91
23933	15	18	2.6	+/- 0.7	14.7	1	89.14
23934	20	22	3.1	+/- 1.1	10.6	1	96.53
23935	25	28	3.9	+/- 1.3	12	1	103.76
23936	32	35	4.6	+/- 1.3	13.9	1	111.23
23937	40	42	5.9	+/- 1.3	14.9	1	242.77
23938	50	54	7	+/- 1.8	17.6	1	262.50
23939	65	76.1	8.8	+/- 2.2	26.2	1	320.28
23940	80	88.9	11.7	+/- 2.3	28.6	1	333.19
23941	100	108	14.4	+/- 2.3	54.2	1	786.65

2.2.12 Sealings

Geberit Mapress Carbon Steel cap



Application purposes

- For technical building systems, industry and shipbuilding
- For permanent termination of pipe ends
- Application overview: Geberit Mapress Carbon Steel \rightarrow p. 102

Characteristics


- Pressing indicator
- Leaky if unpressed
- Outside zinc-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Material		Non-alloy steel 1.0034 E195 (EN 10305)						
Art. no.	DN	d, \varnothing [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
20211	10	12	2	0.3	25	5		3.35
20212	12	15	2.3	0.3	100	20		3.35
20213	15	18	2.3	0.3	100	10		4.03
20214	20	22	2.4	0.3	100	10		4.35
20215	25	28	2.6	0.3	50	10		5.04
20216	32	35	2.9	0.3	50	5		7.13
20217	40	42	3.3	0.3	48	4		15.07
20218	50	54	3.8	0.3	48	4		16.96
20222	65	66.7	5.5	0.5			1	23.66
20219	65	76.1	6	0.7	5		1	25.29
20220	80	88.9	6.7	0.7			1	35.03
20221	100	108	8.2	0.7			1	45.24

2.2.13 T-pieces for heating

Geberit Mapress T-piece crossing with insulation box

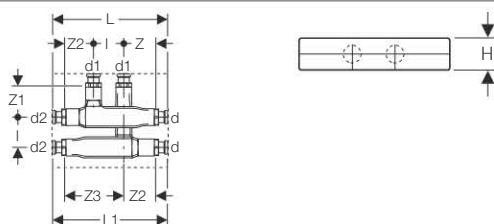

Application purposes

- For connecting to two parallel pipes without intersecting
- For heating and cooling
- Application overview: Geberit Mapress Carbon Steel → p. 102

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug


Technical data

Material	DR brass
Material, insulation	EPP
Insulation thickness	8.5 mm
Thermal conductivity, insulation	0.038 W/(m · K)

Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	H [cm]	L [cm]	L1 [cm]	I [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	Z3 [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
63113	12 / 12 / 12	15	15	15	5	19	19	5	4.8	5.2	5.3	9.8	5	1	19.85
63115	15 / 12 / 15	18	15	18	5	19	19	5	4.8	5.2	5.3	9.8	5	1	57.69
63117	20 / 12 / 20	22	15	22	5	19.2	19.2	5	4.8	5.2	5.3	9.8	5	1	60.42
63118	20 / 15 / 20	22	18	22	5	19.2	19.2	5	4.8	5.2	5.3	9.8	5	1	60.42

2.2.14 Connections for heating

Geberit Mapress metal pipe connector bend 90° with union connector for Euro cone



Application purposes

- For connecting radiator valves
- Exclusively suitable for heating and cooling
- Application overview: Geberit Mapress Carbon Steel → p. 102

Characteristics

- Pressing indicator
- Leaky if unpressed
- Nickel-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Material	Brass / copper
----------	----------------

Scope of delivery

- Union connector for Euro cone G 3/4"

Art. no.	DN	d, ø [mm]	d1, ø [mm]	L [cm]	L1 [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
63120	12	15	15	10.2	30	8.2	20	2	7.22


Accessories

- Insulation box for Geberit metal pipe connector bend and connector T-pieces → p. 206



- Tighten the union as far as it will go

Geberit Mapress connector box type C

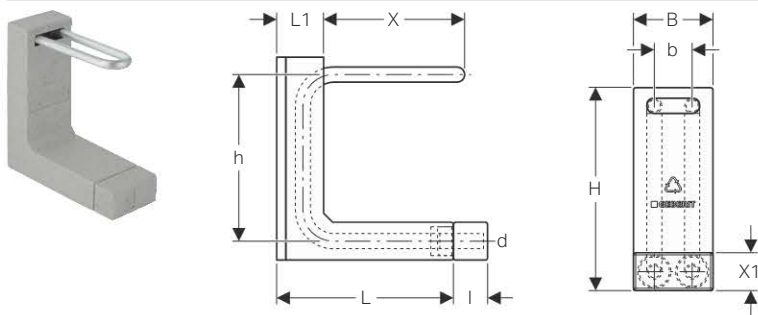

Application purposes

- For heating and cooling
- Application overview: Geberit Mapress Carbon Steel → p. 102

Characteristics

- System pipe, outside nickel-plated
- For pressure test without radiator

Technical data


Material	Copper
Material, insulation	EPS
Insulation thickness	13 mm
Thermal conductivity, insulation	0.031 W/(m · K)

Art. no.	DN	d, \emptyset [mm]	B [cm]	b [cm]	H [cm]	h [cm]	L [cm]	L1 [cm]	I [cm]	X [cm]	X1 [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
63108	12	15	10.5	5	27	22	22.3	6.3	4.5	17.6	5	10	1	20.94

Accessories

- Geberit union connector for Euro cone → p. 130

Geberit Mapress connector box type L

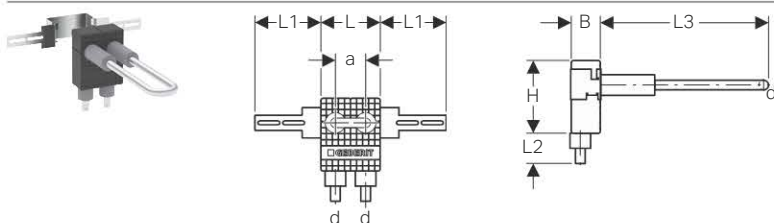

Application purposes

- For heating and cooling
- Application overview: Geberit Mapress Carbon Steel → p. 102

Characteristics

- System pipe, outside nickel-plated
- For pressure test without radiator

Technical data

Material	Copper
Material, insulation	PUR
Insulation thickness	7 mm
Thermal conductivity, insulation	0.038 W/(m · K)

Scope of delivery


- Installation sheet

Art. no.	DN	d, \emptyset [mm]	a [cm]	B [cm]	H [cm]	L [cm]	L1 [cm]	L2 [cm]	L3 [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
63109	12	15	5	5	12	10	11	5	25	10	1	27.30

Accessories

- Geberit union connector for Euro cone → p. 130

Geberit Mapress Carbon Steel connector T-piece set for return flow

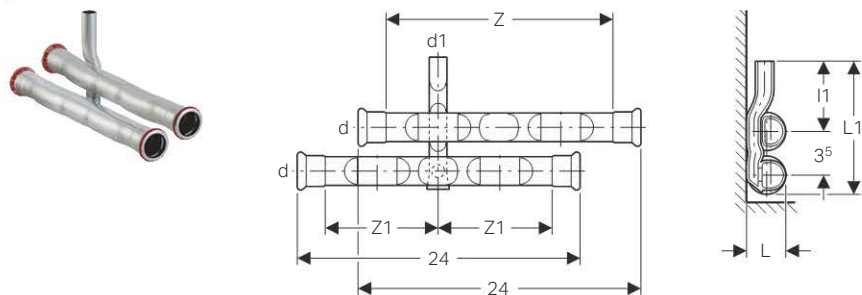

Application purposes

- For skirting board systems
- For heating and cooling
- Application overview: Geberit Mapress Carbon Steel → p. 102

Characteristics

- Pressing indicator
- Leaky if unpressed
- Outside zinc-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data


Material	Non-alloy steel 1.0034 E195 (EN 10305)
----------	--

Scope of delivery

- Connector T-piece with long connection
- Socket, offset, long

Art. no.	DN	d, ø [mm]	d1, ø [mm]	L [cm]	L1 [cm]	l1 [cm]	Z [cm]	Z1 [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
23602	12	15	15	2.7	10.8	6.5	10	20		1	21.24
23603	15 / 12	18	15	2.9	11	6.5	10	20	5	1	21.96
23604	20 / 12	22	15	3.3	11.2	6.5	9.9	19.8		1	22.72

Geberit Mapress Carbon Steel connector T-piece set for inlet and return flow

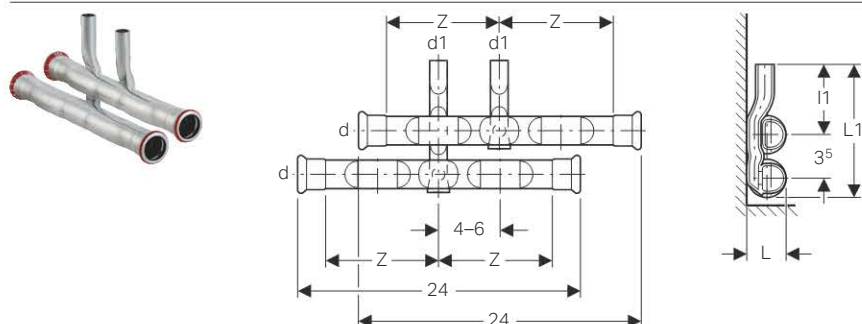

Application purposes

- For skirting board systems
- For heating and cooling
- Application overview: Geberit Mapress Carbon Steel → p. 102

Characteristics

- Pressing indicator
- Leaky if unpressed
- Inlet and return flow exchangeable
- Outside zinc-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data


Material	Non-alloy steel 1.0034 E195 (EN 10305)
----------	--

Scope of delivery

- Connector T-piece with short connection
- Connector T-piece with long connection

Art. no.	DN	d, ø [mm]	d1, ø [mm]	L [cm]	L1 [cm]	l1 [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
24002	12	15	15	2.7	10.8	6.5	10	25		1	34.99
24003	15 / 12	18	15	2.9	11	6.5	10	25		1	36.21
24004	20 / 12	22	15	3.3	11.2	6.5	10		5	1	38.04

Geberit Mapress Carbon Steel connector T-piece set for inlet and return flow, with union connector for Euro cone

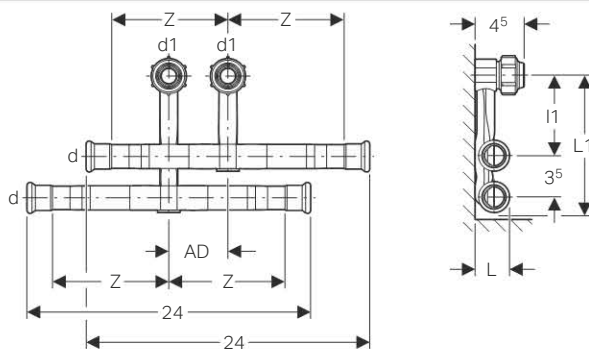

Application purposes

- For skirting board systems
- For heating and cooling
- Application overview: Geberit Mapress Carbon Steel → p. 102

Characteristics

- Pressing indicator
- Leaky if unpressed
- Inlet and return flow exchangeable
- Outside zinc-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug
- Union connector for Geberit Mapress Stainless Steel 1.4401 system pipes

- Union connector for Geberit Mapress Carbon Steel system pipes
- Union connector for copper pipes, rough, nickel-plated and chrome-plated
- Installation completely in front of the wall

Technical data

Material	Non-alloy steel 1.0034 E195 (EN 10305)
----------	--

Scope of delivery

- Connector T-piece with short connection
- Connector T-piece with long connection
- 2 union connectors for Euro cone G 3/4"

Art. no.	DN	d, ø [mm]	d1, ø [mm]	AD [cm]	L [cm]	L1 [cm]	I1 [cm]	Z [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
24042	12	15	15	5	2.7	12.6	6.8	10	5	1	47.77
24043	15 / 12	18	15	5	2.9	12.7	6.8	10	5	1	49.19
24044	20 / 12	22	15	5	3.3	13	6.8	10	5	1	51.34




- Tighten the union as far as it will go

Geberit Mapress Carbon Steel

Geberit Mapress Carbon Steel
Connections for heating

Geberit metal pipe elbow 90°, lockable, with union connector for Euro cone

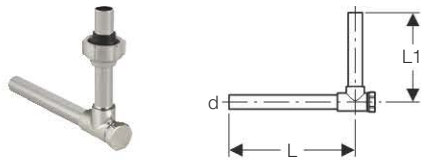

Application purposes

- For connecting radiator valves
- For heating and cooling
- Application overview: Geberit Mapress Carbon Steel → p. 102

Characteristics

- Nickel-plated

Art. no.	DN	d, ø [mm]	L [cm]	L1 [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
611.603.22.2	12	15	12.5	10	50	10	2	9.30



- Tighten the union as far as it will go

Geberit union connector for Euro cone



Application purposes

- For Geberit Mapress Stainless Steel system pipes 1.4401
- For Geberit Mapress Carbon Steel system pipes
- For copper pipes, rough, nickel-plated or chrome-plated
- For heating and cooling
- Application overview: Geberit Mapress Carbon Steel → p. 102

Characteristics


- Clamping ring union
- Seal made of EPDM
- Union nut made of brass, nickel-plated

Art. no.	DN	d, ø [mm]	G ["]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
25072	12	15	3/4	25	5	3.03



- Tighten the union as far as it will go

Geberit Mapress Carbon Steel connector with union nut



Application purposes

- For connecting radiators and radiator valves
- Suitable exclusively for threads with an inner diameter of $\leq di$
- For heating and cooling
- Application overview: Geberit Mapress Carbon Steel → p. 102

- Union nut made of brass, nickel-plated
- Seal ring made of CIIR, black
- Flat gasket made of EPDM
- Pressing socket with transparent protection plug

Characteristics



- Pressing indicator
- Leaky if unpressed
- Outside zinc-plated

Technical data

Media temperature with flat gasket EPDM	0–100 °C
Material	Non-alloy steel 1.0034 E195 (EN 10305)

Art. no.	DN	d, \varnothing [mm]	G ["]	di, \varnothing [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
25042	12	15	1/2	10	5.1	2.5	25	5	4.06
25048	15	18	1/2	10	5.3	2.6	25	5	4.12
25049	20	22	3/4	13	5.4	2.7	50	10	5.84

Geberit Mapress Carbon Steel suction nozzle for single pipe heating



Application purposes

- For heating
- For inserting in Geberit Mapress T-pieces
- Application overview: Geberit Mapress Carbon Steel → p. 102

Technical data


Material	Brass CW614N
----------	--------------

Art. no.	DN	d, \varnothing [mm]	di, \varnothing [mm]	di1 [mm]	SU1 [pc.]	GBP/pc.
90253	15	18	15.6	7	1	0.95
90254	20	22	19	9	1	1.09
90255	25	28	25	12	1	1.21

2.3 Geberit Mapress Carbon Steel, FKM, blue

2.3.1 System pipes 1.0034 (E 195)

Geberit Mapress Carbon Steel system pipe, outside zinc-plated, small bundle (FKM, blue)

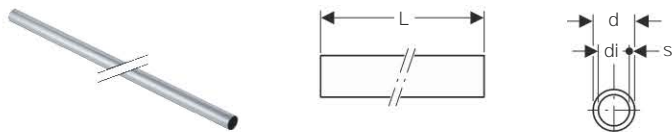

Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Carbon Steel → p. 102

Characteristics

- Outside zinc-plated


Technical data

Material	Non-alloy steel 1.0034 E195 (EN 10305)
Surface roughness	10 µm
Thermal expansion	0.012 mm/(m · K)
Thermal conductivity, pipe	60 W/(m · K)

Art. no.	DN	d, ø [mm]	di, ø [mm]	s [mm]	L [m]	SU3 [m]	SU2 [m]	GBP/m
29251	10	12	9.6	1.2	6	120		2.12
29252	12	15	12.6	1.2	6	120		2.16
29253	15	18	15.6	1.2	6	90		2.59
29254	20	22	19	1.5	6	60		3.45
29255	25	28	25	1.5	6	60		4.84
29256	32	35	32	1.5	6	30		6.25
29257	40	42	39	1.5	6	30		8.58
29258	50	54	51	1.5	6	30		11.13
29209	65	76.1	72.1	2	6		6	24.52
29210	80	88.9	84.9	2	6		6	27.72
29211	100	108	104	2	6		6	32.38

2.3.2 System pipes 1.0215 (E 220)

Geberit Mapress Carbon Steel system pipe, inside and outside zinc-plated, small bundle (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Carbon Steel → p. 102

Characteristics

- Sendzimir galvanized


Technical data

Material	Non-alloy steel 1.0215 E220 (EN 10305)
Surface roughness	10 µm
Thermal expansion	0.012 mm/(m · K)
Thermal conductivity, pipe	60 W/(m · K)

Art. no.	DN	d, ø [mm]	di, ø [mm]	s [mm]	L [m]	SU3 [m]	SU2 [m]	GBP/m
19452	12	15	12	1.5	6	60		2.01
19453	15	18	15	1.5	6	60		2.45
19454	20	22	19	1.5	6	60		3.34
19455	25	28	25	1.5	6	60		4.72
19456	32	35	32	1.5	6	30		5.82
19457	40	42	39	1.5	6	30		6.90
19458	50	54	51	1.5	6	30		8.84
19459	65	76.1	72.1	2	6		6	16.59
19460	80	88.9	84.9	2	6		6	20.48
19461	100	108	104	2	6		6	26.57

2.3.3 Pipe nipples

Geberit Mapress Carbon Steel pipe nipple, outside zinc-plated (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Carbon Steel → p. 102

Characteristics

- Outside zinc-plated


Technical data

Material	Non-alloy steel 1.0034 E195 (EN 10305)
----------	--

Art. no.	DN	d, ø [mm]	di, ø [mm]	s [mm]	L [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
22050	12	15	12.6	1.2	5		5	1	1.03
22051	15	18	15.6	1.2	5	25	5		1.14
22052	20	22	19	1.5	5.2		5	1	1.20
22053	25	28	25	1.5	5.6	25	5		1.63
22054	32	35	32	1.5	6.2		5	1	2.87
22055	40	42	39	1.5	8		5	1	4.07
22056	50	54	51	1.5	9		5	1	5.27
22057	65	76.1	72.1	2	13.6			1	24.49
22058	80	88.9	84.9	2	15			1	28.66
22059	100	108	104	2	18			1	40.63

2.3.4 Couplings

Geberit Mapress Carbon Steel coupling (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Carbon Steel → p. 102

Characteristics


- Pressing indicator
- Outside zinc-plated
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Material		Non-alloy steel 1.0034 E195 (EN 10305)					
Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.	
51061	PO	10	12	4.2	0.8	1	6.02
51062		12	15	4.8	0.8	1	3.49
51063		15	18	4.8	0.8	1	4.01
51064		20	22	5	0.8	1	4.98
51065		25	28	5.4	0.8	1	5.91
51066		32	35	6.2	1	1	8.73
51067		40	42	7.1	1.1	1	12.22
51068		50	54	8.3	1.3	1	17.15
51071		65	76.1	14.1	3.5	1	67.52
51072		80	88.9	16.2	4.2	1	79.07
51073		100	108	19.4	4.4	1	120.87

PO: Phase out as of April 2017

Geberit Mapress Carbon Steel slip coupling (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Carbon Steel → p. 102

Characteristics

- Pressing indicator
- Outside zinc-plated
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Material		Non-alloy steel 1.0034 E195 (EN 10305)					
Art. no.	DN	d, ø [mm]	E [cm]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
51081	PO	10	12	2.5	6.7	1.7	6.08
51082		12	15	2.5	8	3	3.98
51083		15	18	2.5	8	3	4.52


PO: Phase out as of April 2017

Art. no.	DN	d, ø [mm]	E [cm]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
51084	20	22	2.5	8.4	3.4	1	5.33
51085	25	28	3	9.1	3.1	1	6.69
51086	32	35	3	10.2	4.2	1	11.40
51087	40	42	4	12	4	1	13.82
51088	50	54	4	14	6	1	19.83
51091	65	76.1	6	23	11	1	96.62
51092	80	88.9	7	26	12	1	110.26
51093	100	108	8	31	15	1	155.13

PO: Phase out as of April 2017

2.3.5 Reducers

Geberit Mapress Carbon Steel reducer with plain end (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Carbon Steel → p. 102

Characteristics

- Pressing indicator
- Outside zinc-plated
- Seal ring made of FKM, blue
- Pressing socket with black protection plug


Technical data

Material		Non-alloy steel 1.0034 E195 (EN 10305)					
Art. no.	DN	d, ø [mm]	d1, ø [mm]	H [cm]	L [cm]	SU1 [pc.]	GBP/pc.
51131	PO	12 / 10	15	12	3.4	5.1	3.56
51132	PO	15 / 10	18	12	3.6	5.3	2.45
51133		15 / 12	18	15	3.5	5.5	2.45
51134		20 / 12	22	15	3.9	5.9	2.32
51135		20 / 15	22	18	3.7	5.7	2.32
51136		25 / 12	28	15	4.6	6.6	3.18
51137		25 / 15	28	18	4.4	6.4	3.18
51138		25 / 20	28	22	3.9	6	3.18
51139	PO	32 / 12	35	15	5.5	7.5	3.36
51140	PO	32 / 15	35	18	5.5	7.4	3.36
51141		32 / 20	35	22	5	7.1	3.36
51142		32 / 25	35	28	4.5	6.8	3.36
51144	PO	40 / 15	42	18	6	8	8.13
51145		40 / 20	42	22	6.1	8.2	8.13
51146		40 / 25	42	28	6	8.3	8.13
51147		40 / 32	42	35	5.1	7.7	8.13
51150		50 / 20	54	22	7.4	9.5	16.00
51151		50 / 25	54	28	8.7	11	16.00
51152		50 / 32	54	35	8	10.6	16.00
51153		50 / 40	54	42	6.2	9.2	16.00
51164		65 / 50	76.1	54	11.1	14.6	43.74
51167		80 / 50	88.9	54	12.8	16.3	59.36
51168		80 / 65	88.9	76.1	10.8	16.1	59.36
51169		100 / 50	108	54	13.7	17.2	65.20
51171		100 / 65	108	76.1	13.1	18.4	65.20
51172		100 / 80	108	88.9	14.3	20.3	65.20

PO: Phase out as of April 2017

2.3.6 Bends

Geberit Mapress Carbon Steel bend (FKM, blue)

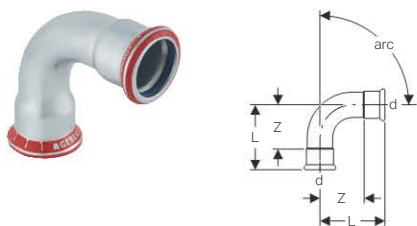

Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Carbon Steel → p. 102

Characteristics

- Pressing indicator
- Outside zinc-plated
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Material	Non-alloy steel 1.0034 E195 (EN 10305)
----------	--


Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
arc / angle: 45°						
51221	PO 10	12	3.2	1.5	1	5.28
51222	12	15	3.6	1.6	1	4.00
51223	15	18	3.7	1.7	1	4.51
51224	20	22	4.2	2.1	1	6.30
51225	25	28	4.8	2.5	1	8.11
51226	32	35	4.3	1.7	1	13.20
51227	40	42	5.1	2.1	1	20.41
51228	50	54	6.2	2.7	1	27.42
51231	65	76.1	10.3	5	1	89.60
51232	80	88.9	11.7	5.7	1	107.07
51233	100	108	14.5	7	1	183.31
arc / angle: 90°						
51281	PO 10	12	4.2	2.5	1	5.28
51282	12	15	4.9	2.9	1	3.76
51283	15	18	5.3	3.3	1	4.66
51284	20	22	6.1	4	1	6.28
51285	25	28	7.2	4.9	1	8.10
51286	32	35	6.8	4.2	1	16.98
51287	40	42	8	5	1	25.24
51288	50	54	10	6.5	1	32.09
51291	65	76.1	15.9	10.6	1	95.29
51292	80	88.9	18.5	12.5	1	119.95
51293	100	108	23	15.5	1	183.31

PO: Phase out as of April 2017



- Bend 45° / 90° in the dimensions d76.1 / 88.9 / 108 with new masses as of 01.04.2017

Geberit Mapress Carbon Steel bend with plain end (FKM, blue)

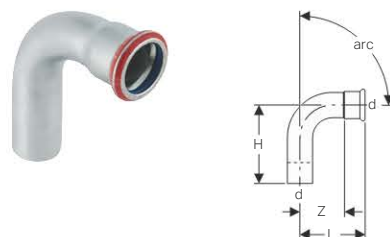

Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Carbon Steel → p. 102

Characteristics

- Pressing indicator
- Outside zinc-plated
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Material	Non-alloy steel 1.0034 E195 (EN 10305)
----------	--


Art. no.	DN	d, ø [mm]	H [cm]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
arc / angle: 45°							
51241	PO 10	12	4.1	3.2	1.5	1	5.28
51242	12	15	4.5	3.6	1.6	1	4.00
51243	15	18	4.2	3.7	1.7	1	4.51
51244	20	22	5.2	4.2	2.1	1	6.30
51245	25	28	5.6	4.8	2.5	1	8.11
51246	32	35	5.3	4.3	1.7	1	11.13
51247	40	42	6.1	5.1	2.1	1	16.96
51248	50	54	7.3	6.2	2.7	1	24.12
51251	65	76.1	11.1	10.3	5	1	89.60
51252	80	88.9	12.8	11.7	5.7	1	107.07
51253	100	108	15.8	14.5	7	1	183.31
arc / angle: 90°							
51311	PO 10	12	4.8	4.2	2.5	1	5.28
51312	12	15	5.9	4.9	2.9	1	3.74
51313	15	18	6.1	5.3	3.3	1	4.66
51314	20	22	7	6.1	4	1	6.28
51315	25	28	7.9	7.2	4.9	1	8.10
51316	32	35	7.7	6.8	4.2	1	16.98
51317	40	42	9	8	5	1	25.24
51318	50	54	11.1	10	6.5	1	32.09
51321	65	76.1	16.7	15.9	10.6	1	101.55
51322	80	88.9	19.5	18.5	12.5	1	122.92
51323	100	108	24.1	23	15.5	1	187.38

PO: Phase out as of April 2017



- Bend 45° / 90° in the dimensions d76.1 / 88.9 / 108 with new masses as of 01.04.2017

Geberit Mapress Carbon Steel bend with plain ends 90° (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Carbon Steel → p. 102

Characteristics


- Outside zinc-plated

Technical data

Material	Non-alloy steel 1.0034 E195 (EN 10305)
----------	--

Art. no.	DN	d, ø [mm]	H [cm]	H1 [cm]	K [cm]	K1 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
20401	10	12	7	12	1.7	6.7	25	5		1.92
20402	12	15	7	12	2.2	7.2	100	20		2.36
20403	15	18	7	12	1.7	6.7	50	10		2.55
20404	20	22	7	12	0.9	5.9	50	10		2.55
20405	25	28	8	12	0.7	4.7	50	10		3.00
20406	32	35	12	20	3	11	25	5		7.00
20407	40	42	15	25	4.4	14.4		5	1	11.37
20408	50	54	20	30	6.5	16.5			1	14.38

Geberit Mapress Carbon Steel pipe bridge (FKM, blue)

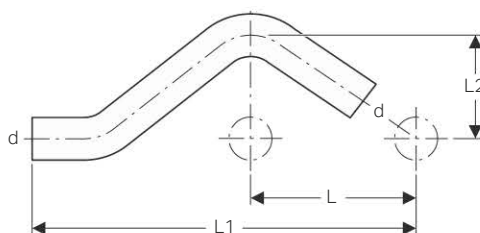

Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Carbon Steel → p. 102

Characteristics

- Outside zinc-plated


Technical data

Material	Non-alloy steel 1.0034 E195 (EN 10305)
----------	--

Art. no.	DN	d, ø [mm]	L [cm]	L1 [cm]	L2 [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
20801	10	12	5.5	15.4	2.9	25	5	2.59
20802	12	15	5.7	15.8	3	100	10	2.87
20803	15	18	6	16.6	3.1	50	10	3.13
20804	20	22	6.5	17.9	3.3	50	10	3.61
20805	25	28	7.3	20.6	3.6	50	10	4.44

2.3.7 T-pieces

Geberit Mapress Carbon Steel T-piece, equal (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Carbon Steel → p. 102

Characteristics

- Pressing indicator
- Outside zinc-plated
- Seal ring made of FKM, blue
- Pressing socket with black protection plug


Technical data

Material	Non-alloy steel 1.0034 E195 (EN 10305)
----------	--

Art. no.	DN	d, ø [mm]	L [cm]	L1 [cm]	I [cm]	Z [cm]	Z1 [cm]	SU1 [pc.]	GBP/pc.
51331	PO	10	12	5.6	3.5	2.8	1.1	1.8	1 10.48
51332		12	15	6.4	3.9	3.2	1.2	1.9	1 7.61
51333		15	18	6.8	4.1	3.4	1.4	2.1	1 8.61
51334		20	22	7.4	4.4	3.7	1.6	2.3	1 9.95
51335		25	28	8.4	5	4.2	1.9	2.7	1 12.50
51336		32	35	10	5.7	5	2.4	3.1	1 18.35
51337		40	42	11.4	6.5	5.7	2.7	3.5	1 27.39
51338		50	54	13.8	7.7	6.9	3.4	4.2	1 34.84
51341		65	76.1	23	11	11.5	6.2	5.7	1 161.17
51342		80	88.9	26	12.8	13	7	6.8	1 186.86
51343		100	108	31	15.3	15.5	8	7.8	1 264.43

PO: Phase out as of April 2017

Geberit Mapress Carbon Steel T-piece, reduced (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Carbon Steel → p. 102

- Outside zinc-plated
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Characteristics

- Pressing indicator

Technical data

Material	Non-alloy steel 1.0034 E195 (EN 10305)
----------	--


Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	L [cm]	L1 [cm]	I [cm]	I2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU1 [pc.]	GBP/pc.
51353	PO	12 / 10 / 12	15	12	15	6.4	3.6	3.2	3.2	1.2	1.9	1.2	1 7.55
51354	PO	15 / 10 / 15	18	12	18	6.8	3.8	3.4	3.4	1.4	2.1	1.4	1 8.44
51356		15 / 12 / 15	18	15	18	6.8	4.2	3.4	3.4	1.4	2.2	1.4	1 8.44
51357		20 / 12 / 20	22	15	22	7.4	4.4	3.7	3.7	1.6	2.4	1.6	1 9.57
51359		20 / 15 / 20	22	18	22	7.4	4.4	3.7	3.7	1.6	2.4	1.6	1 9.57
51362		25 / 12 / 25	28	15	28	8.4	4.7	4.2	4.2	1.9	2.7	1.9	1 12.56
51364		25 / 15 / 25	28	18	28	8.4	4.7	4.2	4.2	1.9	2.7	1.9	1 12.56

PO: Phase out as of April 2017

Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	L [cm]	L1 [cm]	I [cm]	I2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU1 [pc.]	GBP/pc.
51366	25 / 20 / 25	28	22	28	8.4	4.8	4.2	4.2	1.9	2.7	1.9	1	12.56
51367	32 / 12 / 32	35	15	35	10	5.1	5	5	2.4	3.1	2.4	1	17.78
51368	32 / 15 / 32	35	18	35	10	5.1	5	5	2.4	3.1	2.4	1	17.78
51369	32 / 20 / 32	35	22	35	10	5.2	5	5	2.4	3.1	2.4	1	17.78
51370	32 / 25 / 32	35	28	35	10	5.5	5	5	2.4	3.2	2.4	1	17.78
51373	40 / 20 / 40	42	22	42	11.4	5.5	5.7	5.7	2.7	3.4	2.7	1	25.08
51374	40 / 25 / 40	42	28	42	11.4	5.8	5.7	5.7	2.7	3.5	2.7	1	25.08
51375	40 / 32 / 40	42	35	42	11.4	6.1	5.7	5.7	2.7	3.5	2.7	1	25.08
51378	50 / 20 / 50	54	22	54	13.8	6.1	6.9	6.9	3.4	4	3.4	1	32.53
51379	50 / 25 / 50	54	28	54	13.8	6.4	6.9	6.9	3.4	4.1	3.4	1	32.53
51380	50 / 32 / 50	54	35	54	13.8	6.8	6.9	6.9	3.4	4.2	3.4	1	32.53
51381	50 / 40 / 50	54	42	54	13.8	7.2	6.9	6.9	3.4	4.2	3.4	1	32.53
51390	65 / 25 / 65	76.1	28	76.1	23	7.9	11.5	11.5	6.2	5.6	6.2	1	161.30
51391	65 / 32 / 65	76.1	35	76.1	23	8.1	11.5	11.5	6.2	5.5	6.2	1	161.30
51392	65 / 40 / 65	76.1	42	76.1	23	8.1	11.5	11.5	6.2	5.1	6.2	1	161.30
51393	65 / 50 / 65	76.1	54	76.1	23	8.7	11.5	11.5	6.2	5.2	6.2	1	161.30
51396	80 / 25 / 80	88.9	28	88.9	26	8.7	13	13	7	6.4	7	1	183.03
51397	80 / 32 / 80	88.9	35	88.9	26	9	13	13	7	6.4	7	1	183.03
51398	80 / 40 / 80	88.9	42	88.9	26	9.2	13	13	7	6.2	7	1	183.03
51399	80 / 50 / 80	88.9	54	88.9	26	9.3	13	13	7	5.8	7	1	183.03
51400	PO 80 / 65 / 80	88.9	76.1	88.9	26	11.4	13	13	7	6.1	7	1	183.03
51405	100 / 50 / 100	108	54	108	31	11.3	15.5	15.5	8	7.8	8	1	249.44
51407	100 / 65 / 100	108	76.1	108	31	12.4	15.5	15.5	8	7.1	8	1	249.44
51408	100 / 80 / 100	108	88.9	108	31	13.5	15.5	15.5	8	7.5	8	1	249.44

PO: Phase out as of April 2017

Geberit Mapress Carbon Steel T-piece with female thread (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Carbon Steel → p. 102

Characteristics

- Pressing indicator
- Outside zinc-plated
- Seal ring made of FKM, blue
- Pressing socket with black protection plug


Technical data

Material	Non-alloy steel 1.0034 E195 (EN 10305)
----------	--

Art. no.		DN	d, ø [mm]	Rp ["]	d1, ø [mm]	L [cm]	L1 [cm]	l [cm]	l2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU1 [pc.]	GBP/pc.
51411	PO	10 / 15 / 10	12	1/2	12	5.6	3.6	2.8	2.8	1.1	2.3	1.1	1	15.78
51413		12 / 15 / 12	15	1/2	15	6.4	3.7	3.2	3.2	1.2	2.4	1.2	1	9.00
51414		15	18	1/2	18	6.8	3.9	3.4	3.4	1.4	2.6	1.4	1	9.36
51416		20 / 15 / 20	22	1/2	22	7.4	4	3.7	3.7	1.6	2.7	1.6	1	10.67
51417		20 / 20 / 20	22	3/4	22	7.4	4.4	3.7	3.7	1.6	2.8	1.6	1	10.67
51418		25 / 15 / 25	28	1/2	28	8.4	4.4	4.2	4.2	1.9	3.1	1.9	1	12.41
51419		25 / 20 / 25	28	3/4	28	8.4	4.7	4.2	4.2	1.9	3.2	1.9	1	12.41
51421		32 / 15 / 32	35	1/2	35	10	4.8	5	5	2.4	3.5	2.4	1	16.78
51422		32 / 20 / 32	35	3/4	35	10	5.1	5	5	2.4	3.6	2.4	1	16.78
51423	PO	32 / 25 / 32	35	1	35	10	5.6	5	5	2.4	3.9	2.4	1	16.75
51424		40 / 15 / 40	42	1/2	42	11.4	5.1	5.7	5.7	2.7	3.8	2.7	1	26.36
51425		40 / 20 / 40	42	3/4	42	11.4	5.4	5.7	5.7	2.7	3.9	2.7	1	26.36
51427		50 / 15 / 50	54	1/2	54	13.8	5.7	6.9	6.9	3.4	4.4	3.4	1	29.58
51428		50 / 20 / 50	54	3/4	54	13.8	6	6.9	6.9	3.4	4.5	3.4	1	36.92
51429		50	54	2	54	13.8	7.9	6.9	6.9	3.4	5.6	3.4	1	36.92
51437		65 / 20 / 65	76.1	3/4	76.1	23	7.9	11.5	11.5	6.2	6.4	6.2	1	144.75
51438		65 / 50 / 65	76.1	2	76.1	23	8.9	11.5	11.5	6.2	6.6	6.2	1	144.75
51440		80 / 20 / 80	88.9	3/4	88.9	26	8.8	13	13	7	7.3	7	1	157.18
51441		80 / 50 / 80	88.9	2	88.9	26	9.6	13	13	7	7.3	7	1	157.18
51443		100 / 20 / 100	108	3/4	108	31	10.5	15.5	15.5	8	9	8	1	228.50

PO: Phase out as of April 2017

Geberit Mapress Carbon Steel T-piece with female thread and plain ends



Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Carbon Steel → p. 102

Characteristics

- Outside zinc-plated


Technical data

Material	Non-alloy steel 1.0034 E195 (EN 10305)
----------	--

Art. no.	DN	d, ø [mm]	Rp [']	d1, ø [mm]	H [cm]	H1 [cm]	L [cm]	L1 [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
21341	15	18	1/2	18	5	5	10	3.4	2.1	25	5	5.83
21342	20 / 15 / 20	22	1/2	22	5	5	10	3.6	2.3	50	10	6.36
21343	25 / 15 / 25	28	1/2	28	5	5	10	4.3	3	50	10	7.42
21344	32 / 15 / 32	35	1/2	35	5.7	5.7	11.4	4.7	3.4	50	10	10.28
21345	40 / 15 / 40	42	1/2	42	6.7	6.7	13.4	5	3.7	50	10	16.01
21346	50 / 15 / 50	54	1/2	54	7.3	7.3	14.6	5.7	4.4	25	5	17.28

2.3.8 Adaptors, permanent

Geberit Mapress Carbon Steel adaptor with plain and welding end (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Carbon Steel → p. 102

Characteristics


- Not zinc-plated

Technical data

Material	Non-alloy steel 1.0034 E195 (EN 10305)
----------	--

Art. no.	DN	d, ø [mm]	d1, ø [mm]	s [mm]	s1 [mm]	H [cm]	h [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
12412	12	15	17.2	1.2	2.3	12	3	25	5		4.52
12413	15	18	21.3	1.2	2.9	12	3	25	5		4.65
12414	20	22	26.9	1.5	4	12	3.4	25	5		5.06
12415	25	28	33.7	1.5	4.4	12	3.4	25	5		6.52
12416	32	35	42.4	1.5	5.2	12	4	25	5		7.18
12417	40	42	48.3	1.5	4.7	12	4.5	24	4		9.18
12418	50	54	60.3	1.5	4.7	12	5	24	4		11.31
12419	65	76.1	76.1	2	3.7	12	7	5		1	13.83
12420	80	88.9	88.9	2	4.1	12	7.5	5		1	17.30
12421	100	108	114.3	2	5.2	12	9	5		1	21.04

Geberit Mapress Carbon Steel adaptor with male thread (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Carbon Steel → p. 102

Characteristics

- Pressing indicator
- Outside zinc-plated
- Seal ring made of FKM, blue
- Pressing socket with black protection plug


Technical data

Material	Non-alloy steel 1.0034 E195 (EN 10305)
----------	--

Art. no.	DN	d, ø [mm]	R ["]	H [cm]	L [cm]	SU1 [pc.]	GBP/pc.	
51450	PO	10	12	3/8	1.6	3.3	1	7.23
51453		12 / 15	15	1/2	2.1	4.1	1	6.11
51454		12 / 20	15	3/4	2.6	4.3	1	6.11
51455		15	18	1/2	2.2	4.2	1	7.01
51458		20	22	3/4	2.3	4.4	1	7.53
51461		25	28	1	2.5	4.8	1	10.38
51464		32	35	1 1/4	2.7	5.3	1	13.23
51466		40	42	1 1/2	2.7	5.7	1	15.70
51468		50	54	2	3.6	7.1	1	24.15

PO: Phase out as of April 2017

Geberit Mapress Carbon Steel adaptor with male thread and plain end (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Carbon Steel → p. 102

Characteristics


- Outside zinc-plated

Technical data

Material	Non-alloy steel 1.0034 E195 (EN 10305)
----------	--

Art. no.	DN	d, ø [mm]	R ["]	H [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
21930	10	12	3/8	4.8			1	5.04
21931	10 / 15	12	1/2	5.5			1	5.04
21932	12 / 15	15	1/2	5.7	50	10		5.04
21933	15	18	1/2	5.7	50	5		5.70
21934	15 / 20	18	3/4	5.9		5	1	5.70
21935	20 / 15	22	1/2	5.7	50	5		5.91
21936	20	22	3/4	5.9	50	10		5.91
21937	25	28	1	6.6	50	10		7.95
21938	32	35	1 1/4	8		5	1	10.22
21939	40	42	1 1/2	9.1			1	11.71
21940	50	54	2	10.2		5	1	17.68

Geberit Mapress Carbon Steel adaptor with female thread (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Carbon Steel → p. 102

Characteristics

- Pressing indicator
- Outside zinc-plated
- Seal ring made of FKM, blue
- Pressing socket with black protection plug


Technical data

Material	Non-alloy steel 1.0034 E195 (EN 10305)
----------	--

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.	
51482	PO	10 / 15	12	1/2	3.4	0.4	1	7.23
51484		12 / 15	15	1/2	3.7	0.4	1	6.11
51486		15	18	1/2	3.7	0.4	1	7.01
51488		20	22	1/2	3.8	0.3	1	7.66
51489		20	22	3/4	3.9	0.3	1	7.53
51490		20	22	1	4.2	0.4	1	7.66
51491		25 / 15	28	1/2	3.8	0.2	1	10.38
51492		25	28	3/4	3.8	0.1	1	10.59
51493		25	28	1	4.4	0.4	1	10.38
51495		32	35	1 1/4	4.9	0.4	1	13.50
51498		40	42	1 1/2	5.3	0.4	1	16.04
51500		50	54	2	6.2	0.5	1	24.63

PO: Phase out as of April 2017

Geberit Mapress Carbon Steel adaptor with female thread and plain end (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Carbon Steel → p. 102

Characteristics


- Outside zinc-plated

Technical data

Material	Non-alloy steel 1.0034 E195 (EN 10305)
----------	--

Art. no.	DN	d, ø [mm]	Rp ["]	H [cm]	L [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
21907	10	12	3/8	4.4	5.4			1	5.04
21901	10 / 15	12	1/2	4.5	5.8		5	1	5.04
21908	12 / 10	15	3/8	6	7.4		5	1	4.79
21902	12 / 15	15	1/2	4.8	6.1	50	10		5.04
21903	15	18	1/2	4.8	6.1	50	10		5.52
21904	15 / 20	18	3/4	4.9	6.4			1	5.52
21905	20 / 15	22	1/2	4.9	6.2	100	20		5.88
21906	20	22	3/4	5	6.5	25	5		5.88
21910	25 / 15	28	1/2	4.9	7.4		5	1	7.03
21912	32 / 15	35	1/2	5.2	7.7		5	1	10.22
21914	40 / 15	42	1/2	5.7	8.1			1	11.93
21916	50 / 15	54	1/2	6.2	8.6			1	15.34
21918	65 / 15	76.1	1/2	8.7	10.5			1	39.61
21920	80 / 15	88.9	1/2	10.2	11.5			1	52.82
21922	100 / 15	108	1/2	11.4	12.7			1	77.52

Geberit Mapress Carbon Steel elbow adaptor 90° with male thread (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Carbon Steel → p. 102

Characteristics

- Pressing indicator
- Outside zinc-plated
- Seal ring made of FKM, blue
- Pressing socket with black protection plug


Technical data

Material	Non-alloy steel 1.0034 E195 (EN 10305)
----------	--

Art. no.		DN	d, Ø [mm]	R ["]	H [cm]	L [cm]	Z [cm]		SU1 [pc.]	GBP/pc.
51523	PO	12 / 10	15	3/8	2.1	3.6	1.6		1	6.50
51524	PO	12 / 15	15	1/2	2.6	3.7	1.7		1	6.50
51526	PO	15	18	1/2	2.6	3.7	1.7		1	6.97
51529	PO	20	22	3/4	2.9	4.1	2		1	9.37
51532		25	28	1	5.4	5.8	3.5		1	13.57

PO: Phase out as of April 2017

Geberit Mapress Carbon Steel elbow adaptor 90° with female thread (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Carbon Steel → p. 102

Characteristics

- Pressing indicator
- Outside zinc-plated
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Material	Non-alloy steel 1.0034 E195 (EN 10305)
----------	--

Art. no.		DN	d, Ø [mm]	Rp ["]	L [cm]	L1 [cm]	Z [cm]	Z1 [cm]		SU1 [pc.]	GBP/pc.
51548	PO	20 / 15	22	1/2	4.2	4	2.1	2.7		1	10.68
51550	PO	25 / 15	28	1/2	4.7	4.4	2.4	3.1		1	13.39
51551	PO	25	28	3/4	5.8	5	3.5	3.5		1	15.17
51552		25	28	1	5.8	5.4	3.5	3.6		1	15.17

PO: Phase out as of April 2017

2.3.9 Adaptors and connections, detachable

Geberit Mapress Carbon Steel union (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Carbon Steel → p. 102

Characteristics

- Pressing indicator
- Outside zinc-plated
- Union nut made of brass
- Seal ring made of FKM, blue
- Pressing socket with black protection plug
- Flat gasket made of FPM, green

Technical data

Material		Non-alloy steel 1.0034 E195 (EN 10305)					
Art. no.	DN	d, ø [mm]	G ["]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
51772	12	15	3/4	6.6	2.6	1	16.24
51773	15	18	3/4	6.9	2.9	1	18.69
51774	20	22	1	7.2	3	1	23.21
51775	25	28	1 1/4	7.7	3.1	1	37.34
51776	32	35	1 1/2	8.2	3	1	51.01
51777	40	42	1 3/4	9.5	3.5	1	73.46
51778	50	54	2 3/8	11.3	4.3	1	121.83

Geberit Mapress Carbon Steel adaptor union with male thread (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Carbon Steel → p. 102

Characteristics

- Pressing indicator
- Outside zinc-plated
- Union nut made of brass
- Adaptor made of gunmetal
- Seal ring made of FKM, blue
- Pressing socket with black protection plug
- Flat gasket made of FPM, green

Technical data

Material		Non-alloy steel 1.0034 E195 (EN 10305)						
Art. no.	DN	d, ø [mm]	R ["]	G ["]	H [cm]	L [cm]	SU1 [pc.]	GBP/pc.
51562	12 / 15	15	1/2	3/4	4.1	6.1	1	8.18
51564	15	18	1/2	3/4	4.1	6.1	1	9.34
51567	20	22	3/4	1	4.7	6.8	1	11.54
51570	25	28	1	1 1/4	5.2	7.5	1	17.90

Art. no.	DN	d, ø [mm]	R ["]	G ["]	H [cm]	L [cm]	SU1 [pc.]	GBP/pc.
51571	32	35	1 1/4	1 1/2	5.4	8	1	24.16
51572	40	42	1 1/2	1 3/4	5.5	8.5	1	38.49
51573	50	54	2	2 3/8	6.2	9.7	1	86.07

Geberit Mapress Carbon Steel adaptor union with female thread (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Carbon Steel → p. 102

Characteristics

- Pressing indicator
- Outside zinc-plated
- Union nut made of brass
- Adaptor made of gunmetal
- Seal ring made of FKM, blue
- Pressing socket with black protection plug
- Flat gasket made of FPM, green

Technical data

Material		Non-alloy steel 1.0034 E195 (EN 10305)						
Art. no.	DN	d, ø [mm]	Rp ["]	G ["]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
51611	12	15	1/2	3/4	5.8	2.3	1	8.95
51613	15	18	1/2	3/4	5.8	2.3	1	9.81
51615	20	22	3/4	1	6.3	2.3	1	13.44
51617	25	28	1	1 1/4	7.1	3.3	1	19.35
51618	32	35	1 1/4	1 1/2	7.7	3.5	1	27.51
51619	40	42	1 1/2	1 3/4	8.2	3.1	1	40.03
51620	50	54	2	2 3/8	9.5	3.4	1	87.59

Geberit Mapress Carbon Steel adaptor with union nut (FKM, blue)



Application purposes

- Suitable exclusively for threads with an inner diameter of $\leq di$
- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Carbon Steel → p. 102

Characteristics


- Pressing indicator
- Outside zinc-plated
- Union nut made of brass
- Seal ring made of FKM, blue
- Pressing socket with black protection plug
- Flat gasket made of FPM, green

Technical data

Material	Non-alloy steel 1.0034 E195 (EN 10305)							
Art. no.	DN	d, \emptyset [mm]	G ["]	di, \emptyset [mm]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
51653	12	15	3/4	13	3.7	1.1	1	5.08
51656	15	18	3/4	13	3.7	1.1	1	5.33
51661	20	22	1	20	4	1.1	1	7.44
51665	25	28	1 1/4	26	4.4	1.3	1	10.09
51666	PO	25	28	1 1/2	32	4.6	1.3	10.09
51667		32	35	1 1/2	32	4.8	1.3	15.54
51668	PO	40	42	1 3/4	39	5.2	1.3	21.20
51669	PO	40	42	2	42	5.4	1.4	21.20
51670	PO	50	54	2 3/8	51	5.8	1.5	28.34
51671	PO	50	54	2 1/2	54	6.3	1.4	28.21

PO: Phase out as of April 2017

Geberit Mapress adaptor union with clamping ring for corrugated pipes, NPW, plain end

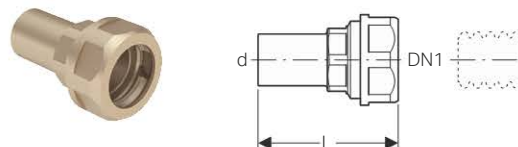


Application purposes

- For thermal media (solar)
- For mineral oils
- For fuels
- Only suitable for liquid media

Technical data

Material	DR brass CW602N						
Art. no.	DN	DN	d, \emptyset [mm]	L [cm]	PN [bar]	SU2 [pc.]	GBP/pc.
22421	12	16	15	6.4	10	2	12.91
22431	12	20	15	6.7	10	2	15.06
22422	15	16	18	6.4	10	2	13.99
22432	15	20	18	6.7	10	2	16.14
22423	20	16	22	6.8	10	2	15.06
22433	20	20	22	6.8	10	2	17.20
22444	25	25	28	6.8	10	2	23.66

Geberit Mapress Carbon Steel flange PN 10/16, with pressing socket (FKM, blue)

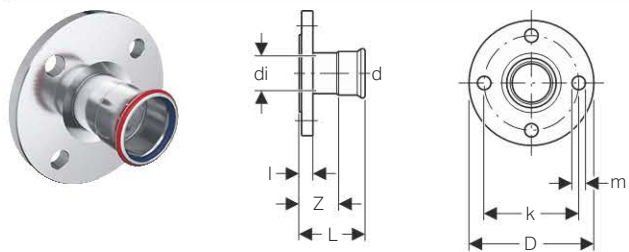

Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Carbon Steel → p. 102

Characteristics

- Pressing indicator
- Outside zinc-plated

- Seal ring made of FKM, blue
- Pressing socket with black protection plug
- Design B1 (raised sealing strip with standard sealing strip), EN 1092-1

Technical data


Material	Non-alloy steel 1.0034 E195 (EN 10305)
----------	--

Art. no.	DN	d, ø [mm]	di, ø [mm]	D [cm]	k [mm]	m [mm]	L [cm]	I [cm]	Z [cm]	n [pc.]	PN [bar]	SU1 [pc.]	GBP/pc.
51675	25	28	25	11.5	85	14	6.9	1.8	4.6	4	10 / 16	1	40.99
51676	32	35	32	14	100	18	7.2	1.8	4.6	4	10 / 16	1	60.59
51677	40	42	39	15	110	18	7.9	1.8	4.9	4	10 / 16	1	70.27
51678	50	54	51	16.5	125	18	8.7	1.8	5.2	4	10 / 16	1	92.00
51679	65	76.1	72	18.5	145	18	11.8	1.8	6.5	4	10 / 16	1	139.49
51680	80	88.9	84.8	20	160	18	12.5	2	6.5	8	10 / 16	1	165.87
51681	100	108	103.9	22	180	18	13	2	5.5	8	10 / 16	1	208.34

Accessories

- Geberit flange gasket PN 10/16 → p. 95
- Geberit bolt set for flange connection, made of steel zinc-plated → p. 152
- Geberit bolt set for flange connection, made of CrNi steel → p. 96

Geberit Mapress Carbon Steel flange PN 6, with plain end

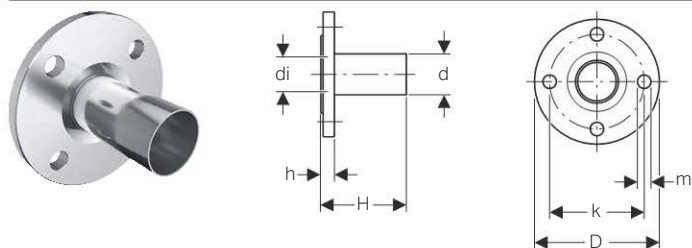

Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Carbon Steel → p. 102

Characteristics

- Outside zinc-plated

- Design B1 (raised sealing strip with standard sealing strip), EN 1092-1

Technical data

Material	Non-alloy steel 1.0034 E195 (EN 10305)
----------	--

Art. no.	DN	d, ø [mm]	di, ø [mm]	D [cm]	k [mm]	m [mm]	H [cm]	h [cm]	n [pc.]	PN [bar]	SU1 [pc.]	GBP/pc.
23764	20	22	19	9	65	11	7.5	1.4	4	6	1	35.49
23765	25	28	25	10	75	11	7.7	1.4	4	6	1	44.35
23766	32	35	32	12	90	14	8.6	1.4	4	6	1	59.89
23767	40	42	39	13	100	14	10.4	1.4	4	6	1	70.99
23768	50	54	51	14	110	14	10.9	1.4	4	6	1	93.14
23769	65	76.1	72	16	130	14	13.2	1.4	4	6	1	119.78
23770	80	88.9	84.8	19	150	18	14.8	1.6	4	6	1	146.40
23771	100	108	103.9	21	170	18	16.1	1.6	4	6	1	172.99

Accessories

- Geberit flange gasket PN 6 → p. 95
- Geberit bolt set for flange connection, made of steel zinc-plated → p. 152
- Geberit bolt set for flange connection, made of CrNi steel → p. 96

2.3.10 Sealings

Geberit Mapress Carbon Steel cap (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- For permanent termination of pipe ends
- Application overview: Geberit Mapress Carbon Steel → p. 102

Characteristics

- Pressing indicator
- Outside zinc-plated
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data


Material		Non-alloy steel 1.0034 E195 (EN 10305)						
Art. no.	DN	d, \varnothing [mm]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.		
51751	PO	10	12	2	0.3	1	5.47	
51752		12	15	2.3	0.3	1	4.34	
51753		15	18	2.3	0.3	1	5.25	
51754		20	22	2.4	0.3	1	5.86	
51755		25	28	2.6	0.3	1	6.81	
51756		32	35	2.9	0.3	1	9.40	
51757		40	42	3.3	0.3	1	18.59	
51758		50	54	3.8	0.3	1	22.38	
51761		65	76.1	6	0.7	1	37.10	
51762		80	88.9	6.7	0.7	1	51.99	
51763		100	108	8.2	0.7	1	77.68	

PO: Phase out as of April 2017

2.4 Accessories for Geberit Mapress Carbon Steel

2.4.1 Caulks for pipes and fittings

Geberit sealing tape

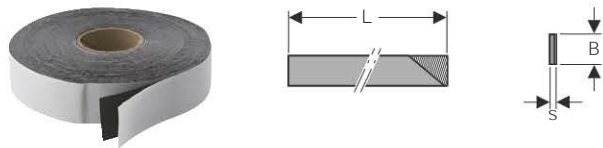

Application purposes

- For protecting Geberit Mapress system pipes and fittings against external corrosion factors
- For protecting the pipe cross-sections of Geberit Mepla against external corrosion factors
- For protecting Geberit Volex system pipes and fittings against external corrosion factors

Characteristics

- UV-resistant
- Black

Technical data

Installation temperature	-10 - +50 °C
Temperature resistance	-60 - +100 °C
Material	IIR

Art. no.	s [mm]	B [cm]	L [m]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
601.813.00.1	1	3	12.5	6	1	29.68
601.815.00.1	1	5	12.5	5	1	49.42



- Attach after pressure test

2.4.2 Pipe covers

Geberit pipe sleeve, slit



Application purposes

- For cladding visible pipes

Characteristics

- Pure white RAL 9010

Technical data

Material	PP
----------	----

Art. no.	di, Ø [mm]	L [m]	SU2 [m]	GBP/m
611.605.BM.1	15-20	1	5	2.14

Geberit double collar



Application purposes

- For covering pipe feed-throughs

Characteristics

- Two-piece
- Pure white RAL 9010


Technical data

Material	PS
----------	----

Art. no.	a [cm]	di, Ø [mm]	B [cm]	L [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
611.610.BM.1	5	14 / 15 / 16 / 18 / 20	5	10	100	10	1.07

2.4.3 Pipe fastenings

Geberit pipe bracket, insulated, with threaded socket M8 / M10

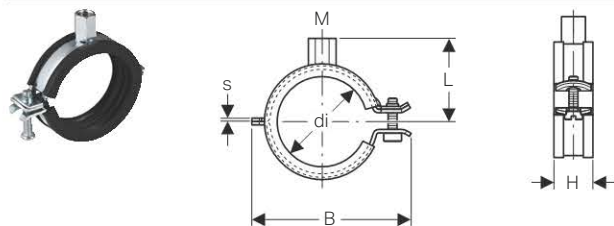

Application purposes

- For fastening Geberit Mapress system pipes
- For fastening Geberit PushFit system pipes, ML
- For fastening Geberit Mepla system pipes, ML
- For fastening Geberit Volex system pipes, ML

Characteristics

- Quick-lock
- Screw with slotted head and crosshead
- Threaded socket four-times welded
- Sound insulation in accordance with DIN 4109
- Zinc-plated

Technical data

Material	Steel
----------	-------

Art. no.	Surface	M [mm]	di, \varnothing [mm]	s [mm]	B [cm]	H [cm]	L [cm]	SU2 [pc.]	GBP/pc.
601.850.26.1	galvanized	8 / 10	12–14	1.5	4.7	2.3	2.9	50	1.37
601.851.26.1	galvanized	8 / 10	15–19	1.5	5.2	2.3	3.1	50	1.37
601.852.26.1	galvanized	8 / 10	20–24	1.5	5.6	2.3	3.4	50	1.37
601.853.26.1	galvanized	8 / 10	25–30	1.5	6.3	2.3	3.6	50	1.48
601.854.26.1	galvanized	8 / 10	32–37	1.5	6.8	2.3	3.9	50	1.59
601.855.26.1	galvanized	8 / 10	40–46	2	7.6	2.3	4.3	50	1.71
601.857.26.1	galvanized	8 / 10	54–58	2	8.9	2.3	4.8	50	2.06
601.858.26.1	galvanized	8 / 10	63–67	2	10	2.3	5.5	50	2.73
601.859.26.1	galvanized	8 / 10	74–80	2	11.9	2.3	6.4	50	2.84
601.860.26.1	galvanized	8 / 10	83–91	2	13	2.3	6.8	50	2.96
601.861.26.1	galvanized	8 / 10	108–114	2.5	15.3	2.8	8.1	25	3.41

Geberit double nipple



Application purposes

- For building drainage

Characteristics


- Reduced
- Zinc-plated

Technical data

Material	Steel
----------	-------

Art. no.	Surface	G ["]	M [mm]	H [cm]	SW [mm]	SU1 [pc.]	GBP/pc.
362.856.26.1	galvanized	1/2	10	2.8	22	1	1.75

Geberit threaded pipe

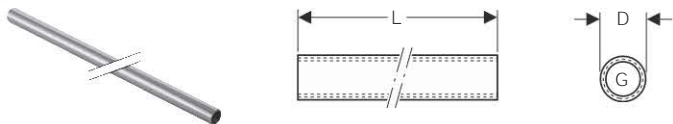

Application purposes

- For fastening Geberit pipe brackets to base plates
- For building drainage
- For anchor point and sliding bracket fastenings

Characteristics


- Female thread continuously threaded
- Zinc-plated

Technical data

Material	Steel
----------	-------

Art. no.	G ["]	D [cm]	L [m]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
362.857.26.1	1/2	2.5	1	2	1	22.51

Geberit base plate, square, two-hole, with threaded socket M8 / M10

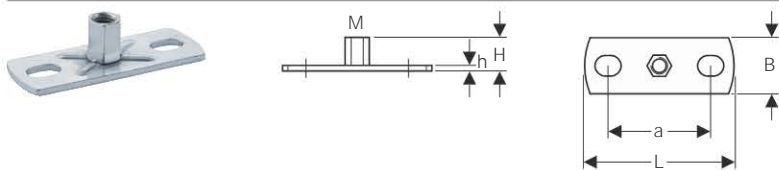

Application purposes

- For building drainage
- For fastening pipe brackets to the building structure
- For fastening pipes to ceilings and walls
- For fastening support rails to the building structure
- For sliding bracket fastening of pipes

Characteristics


- Female thread
- Zinc-plated
- Two fastening points

Technical data

Material	Steel
----------	-------

Art. no.	M [mm]	a [cm]	B [cm]	H [cm]	h [cm]	L [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
362.848.26.1	8 / 10	5.4	3	1.9	0.3	8	50	1	2.80

Geberit base plate, square, two-hole, with threaded socket M10 / G 1/2

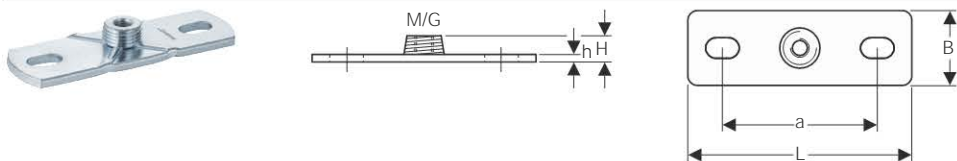

Application purposes

- For fastening pipe brackets to the building structure
- For fastening pipes to ceilings and walls
- For anchor point and sliding bracket fastenings

Characteristics

- Male thread
- Female thread
- Zinc-plated
- Two fastening points


Technical data

Material	Steel
----------	-------

Art. no.	G ["]	M [mm]	a [cm]	B [cm]	H [cm]	h [cm]	L [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
362.851.26.1	1/2	10	8.5	4	1.5	0.5	12	50	1	2.51

2.4.4 Connector fastenings

Fastening for Geberit Mapress elbow adaptor 90°

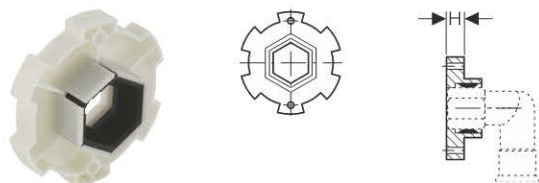

Application purposes

- For double panelling in drywall construction
- For fastening Geberit Mapress Carbon Steel elbow adaptors with female thread Rp 1/2"
- For fastening Geberit Mapress Stainless Steel elbow adaptors with female thread Rp 1/2"

Characteristics

- Sound-absorbing

Art. no.	H [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
90282	1.3	5	1	5.78

2.4.5 System seals

Geberit Mapress seal ring, CIIR, black



Application purposes

- For technical building systems, industry and shipbuilding
- Dimensions \varnothing 76.1–108 mm exclusively for Geberit Mapress Carbon Steel, Geberit Mapress Stainless Steel and Geberit Mapress CuNiFe
- Application overview: Geberit Mapress Carbon Steel → p. 102

Characteristics

- Silicone-free (LABS-free)

Technical data

Operating temperature	-30 - +120 °C
Material	CIIR

Art. no.	DN	d, \varnothing [mm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
90401	10	12	10		0.29
90402	12	15	10		0.29
90403	15	18	10		0.38
90404	20	22	10		0.38
90405	25	28	10		0.42
90406	32	35	10		0.42
90407	40	42	10		0.61
90408	50	54	10		0.61
90412	65	66.7	5		1.33
90409	65	76.1		1	1.69
90410	80	88.9		1	2.29
90411	100	108		1	4.44

Geberit Mapress seal ring, FKM, blue



Application purposes

- For solar technology, industry and shipbuilding
- Dimensions \varnothing 76.1–108 mm exclusively for Geberit Mapress Carbon Steel, Geberit Mapress Stainless Steel and Geberit Mapress CuNiFe
- Application overview: Geberit Mapress Carbon Steel → p. 102

Characteristics


- Silicone-free (LABS-free)

Technical data

Operating temperature	-25 - +180 °C
Material	FKM

Art. no.	DN	d, \varnothing [mm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
90881	10	12		10	1.75
90882	12	15	100	10	0.75
90883	15	18	100	10	0.91
90884	20	22	100	10	1.08
90885	25	28	100	10	1.26
90886	32	35	100	10	1.47
90887	40	42	100	10	2.72
90888	50	54	100	10	3.79
90891	65	76.1	50	5	11.19
90892	80	88.9	50	5	13.91
90893	100	108	25	5	31.02

Geberit Mapress flat gasket, EPDM, black

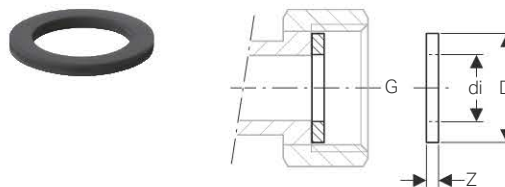

Application purposes


- For technical building systems, industry and shipbuilding
- For flat sealing Geberit Mapress screw connections
- Application overview: Geberit Mapress Carbon Steel → p. 102

Technical data

Operating temperature	0–100 °C
Material	EPDM

Art. no.	G ["]	di, \varnothing [mm]	D [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
90080	1/2	10	1.85	0.2		10	0.22
90081	3/4	13	2.4	0.2	50	10	0.22
90082	1	19.6	3	0.2		10	0.22
90083	1 1/4	25.6	3.9	0.2		10	0.34
90084	1 1/2	32	4.45	0.2		10	0.46
90085	1 3/4	39	5.05	0.2		10	0.56
90086	2 3/8	51	6.6	0.3		10	1.14

Geberit Mapress flat gasket, FPM, green

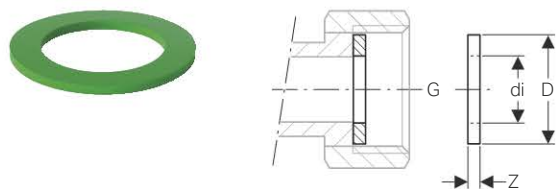

Application purposes

- For flat sealing Geberit Mapress screw connections
- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Carbon Steel → p. 102

Technical data

Operating temperature	-30 - +180 °C
Material	FPM

Art. no.	G ["]	di, ø [mm]	D [cm]	Z [cm]	SU2 [pc.]	GBP/pc.
90092	3/4	13	2.4	0.2	10	1.22
90094	1	19.6	3	0.2	10	2.14
90095	1 1/4	25.6	3.9	0.2	10	0.93
90096	1 1/2	32	4.45	0.2	10	1.14
90097	1 3/4	39	5.05	0.2	10	1.61
90098	2 3/8	51	6.6	0.3	10	2.95

Geberit flange gasket PN 6



Application purposes


- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Carbon Steel → p. 102

Technical data

Operating temperature	-30 - +180 °C
Material	Centellen® HD WS 3822

Art. no.	DN	di, ø [mm]	D [cm]	Z [cm]	PN [bar]	SU1 [pc.]	GBP/pc.
91041	15	20	4.4	0.2	6	1	1.49
91042	20	25	5.4	0.2	6	1	1.83
91043	25	30	6.4	0.2	6	1	2.16
91044	32	38	7.6	0.2	6	1	2.66
91045	40	45	8.6	0.2	6	1	3.34
91046	50	57	9.6	0.2	6	1	3.85
91047	65	76	11.6	0.2	6	1	4.34
91048	80	89	13.2	0.2	6	1	5.84
91049	100	108	15.2	0.2	6	1	6.67

Geberit Mapress flat gasket Centellen® R WS 3825

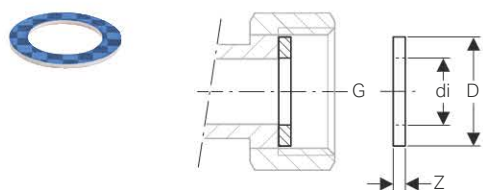

Application purposes

- For technical building systems, industry and shipbuilding
- For flat sealing Geberit Mapress screw connections
- Application overview: Geberit Mapress Carbon Steel → p. 102

Technical data

Operating temperature	-30 - +150 °C
Material	Centellen® R WS 3825

Art. no.	G ["]	di, ø [mm]	D [cm]	Z [cm]	SU2 [pc.]	GBP/pc.
600.021.00.1	1/2	10	1.8	0.2	5	0.91
600.022.00.1	3/4	13	2.4	0.2	5	0.93
600.023.00.1	1	20	3	0.2	5	0.95
600.024.00.1	1 1/8	21	3.5	0.2	5	1.12
600.025.00.1	1 1/4	26	3.9	0.2	5	1.18
600.026.00.1	1 1/2	32	4.5	0.2	5	1.22
600.027.00.1	1 3/4	39	5.1	0.2	5	1.28
600.028.00.1	2	42	5.6	0.2	5	1.36
600.029.00.1	2 1/4	42	6.3	0.2	5	1.41
600.030.00.1	2 3/8	51	6.6	0.2	5	1.52
600.031.00.1	2 1/2	54	7.2	0.2	5	1.72
600.032.00.1	2 3/4	57	7.8	0.2	5	2.08
600.033.00.1	3	72	8.5	0.2	5	2.26
600.034.00.1	3 1/2	85	9.7	0.2	5	2.55

Geberit flange gasket PN 10/16



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Carbon Steel → p. 102


Technical data

Operating temperature	-30 - +180 °C
Material	Centellen® HD WS 3822

Art. no.	DN	di, ø [mm]	D [cm]	Z [cm]	PN [bar]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
91031	15	20	5	0.2	10 / 16		1	1.18
91032	20	25	6	0.2	10 / 16	5	1	1.43
91033	25	30	7	0.2	10 / 16	5	1	1.71
91034	32	38	8.2	0.2	10 / 16	5	1	2.10
91035	40	45	9.2	0.2	10 / 16	5	1	2.62
91036	50	57	10.7	0.2	10 / 16	5	1	3.00
91037	65	76	12.7	0.2	10 / 16	5	1	3.41
91038	80	89	14.2	0.2	10 / 16	5	1	4.20
91039	100	108	16.2	0.2	10 / 16	5	1	5.25

2.4.6 Sets of bolts for flange connections

Geberit bolt set for flange connection, made of steel zinc-plated



Application purposes

- For flanges made of carbon steel, gunmetal and brass

Characteristics

- Zinc-plated
- Strength class 8.8, EN 20898-2

Technical data


Material	Steel
----------	-------

Scope of delivery

- Bolt
- 2 washers
- Nut

Art. no.	M [mm]	m [mm]	L [cm]	IK [cm]	SU2 [pc.]	GBP/pc.
91064	10	11	4.5	3.1	4	1.66
91065	10	11	5	3.6	4	1.66
91066	12	14	5	3	4	1.66
91067	12	14	5.5	3.5	4	1.66
91068	12	14	6	4	4	1.66
91069	16	18	5.5	3.3	4	1.66
91070	16	18	6	3.8	4	1.66
91071	16	18	6.5	4.3	4	1.66
91072	16	18	7	4.8	4	1.66
91073	16	18	8	5.8	4	1.66

Geberit bolt set for flange connection, made of CrNi steel



Application purposes

- For flanges made of stainless steel, gunmetal and brass

Characteristics

- Steel type A2, strength class 70, EN ISO 3506-1

Technical data

Material	CrNi steel 1.4301 (EN 10088)
----------	------------------------------

Scope of delivery

- Bolt
- 2 washers
- Nut

Art. no.	M [mm]	m [mm]	L [cm]	IK [cm]	SU2 [pc.]	GBP/pc.
91164	10	11	4.5	3.1	4	1.64
91165	10	11	5	3.6	4	1.64
91166	12	14	5	3	4	2.06
91167	12	14	5.5	3.5	4	2.06
91168	12	14	6	4	4	1.57
91169	16	18	5.5	3.3	4	1.87
91170	16	18	6	3.8	4	1.87
91171	16	18	6.5	4.3	4	1.87
91172	16	18	7	4.8	4	1.87
91173	16	18	8	5.8	4	1.87



3. Geberit Mapress Copper

3.1	Preliminary remarks.....	157
	Application overview: Geberit Mapress Copper.....	158
3.2	Geberit Mapress Copper.....	160
3.2.1	Couplings.....	160
3.2.2	Reducers.....	161
3.2.3	Bends.....	162
3.2.4	T-pieces.....	164
3.2.5	Pipe crosses.....	166
3.2.6	Adaptors, permanent.....	167
3.2.7	Adaptors and connections, detachable.....	171
3.2.8	Sealings.....	179
3.2.9	Connections.....	180
3.2.10	T-pieces for heating.....	184
3.2.11	Connections for heating.....	184
3.3	Geberit Mapress Copper, Gas.....	188
3.3.1	Couplings.....	188
3.3.2	Reducers.....	188
3.3.3	Bends.....	189
3.3.4	T-pieces.....	191
3.3.5	Adaptors, permanent.....	192
3.3.6	Adaptors and connections, detachable.....	195
3.3.7	Sealings.....	196
3.3.8	Connections.....	196
3.4	Geberit Mapress Copper, FKM, blue.....	198
3.4.1	Couplings.....	198
3.4.2	Reducers.....	198
3.4.3	Bends.....	198
3.4.4	T-pieces.....	200
3.4.5	Adaptors, permanent.....	202
3.4.6	Adaptors and connections, detachable.....	203
3.4.7	Sealings.....	204



3.5	Accessories for Geberit Mapress Copper	205
3.5.1	Insulations for connectors.....	205
3.5.2	Caulks for pipes and fittings	206
3.5.3	Pipe covers.....	206
3.5.4	Pipe fastenings.....	207
3.5.5	Connector fastenings	209
3.5.6	System seals.....	211
3.5.7	Sets of bolts for flange connections.....	214

3.1 Preliminary remarks

Introduction to Geberit Mapress Copper

Geberit Mapress Copper is especially suited for potable water installations as well as for open and closed heating and cooling circuits. There are special fittings available for gas installations, as well as solar and industrial applications.

Thanks to the pressing technology, installations can be carried out reliably and quickly without complex welding and soldering.

In addition to copper pressfittings, the Geberit Mapress Copper product range includes fittings made of gunmetal and brass.

Benefits of Geberit Mapress Copper

Quick

Lower labour costs in comparison to conventional connection technology

Clean

Extremely suitable for renovation of living areas
Seal rings are protected from dirt

Safe

No danger of fire as no welding or soldering necessary
Unpressed connections are easily identified
It is easy to distinguish between product materials using the indicator colours
Application ranges are easily identified by the plug colours
No danger of confusion with third-party products

Economical

No consumables such as oxygen or gas required

Simple

Simple connection technology

Universal

Can be used for surface-mounted and concealed installations

Hygienic

Meets the requirements of DVGWW270 regarding microbiological safety

Experienced

More than 30 years of practical experience in pressing technology

Always consider

The 6 stage pressing process

- Cut and deburr the pipe
- Mark the insertion depth on the pipe
- Prepare the fitting
- Insert the pipe in to the fitting
- Press with the appropriate jaw or collar
- Remove the pressing indicator

Check you are using the correct material for the required application. See page 152 - 153 for an in depth overview of the applications for Geberit Mapress Copper.

Ensure you are using the correct pipe for Geberit Mapress Copper. BS EN 1057 copper pipe is suitable to press with Geberit Mapress Copper fittings. Please see the Geberit Mapress Installation Guide for more information.

Use the correct tooling

Always check that you are using the correct tools, this can be checked in the Geberit Tooling Product Guide and Price List.

Make sure that the tools you are using are in a good condition and are calibrated. There should be a sticker on the tool, jaws, collars and adapters to tell you when the tool next needs calibrating. Go to www.geberit.co.uk/toolservice to find your nearest tool service agent.

If you require any technical assistance, please contact the technical department on 01926 516800, or email technical@geberit.co.uk.



Application overview: Geberit Mapress Copper

Geberit Great Britain, version: December 2016

Application purposes	Operating temperature	Maximum operating pressure	Pipes	Fittings				
			Copper	Copper	Gunmetal	Brass	Carbon steel, copper-plated	
Liquid media								
For cold and hot potable water	0–100 °C	16 bar / 1600 kPa	✓	✓	✓	✓		
For heating water	0–100 °C	16 bar / 1600 kPa	✓	✓	✓	✓	✓	
For cooling water without antifreeze agent	0–100 °C	16 bar / 1600 kPa	✓	✓	✓	✓	✓	
For cooling water with antifreeze agent	-30 – +120 °C	16 bar / 1600 kPa	✓	✓	✓	✓	✓	
For remote network heating water ≤ 120 °C	0–120 °C	16 bar / 1600 kPa	✓	✓	✓	✓		
For service water	0–100 °C	16 bar / 1600 kPa	✓	✓	✓	✓		
For thermal media (solar)	-25 – +220 °C ¹⁾	10 bar / 1000 kPa	✓	✓	✓	✓		
For mineral oils	Upon request	Upon request	✓	✓	✓	✓		
For fuels	Upon request	Upon request	✓	✓	✓	✓		
Gaseous media								
For compressed air (oil purity class 0–3)	0–100 °C	16 / 10 / 8 bar 1600 / 1000 / 800 kPa	✓ ²⁾	✓	✓	✓		
For compressed air (oil purity class 0–X)	0–100 °C	16 / 10 / 8 bar 1600 / 1000 / 800 kPa	✓ ²⁾	✓	✓	✓		
For negative pressure	0–40 °C	Abs. ≥ 0,2 bar / 20 kPa	✓	✓	✓	✓		
For inert gases (e.g. nitrogen)	0–100 °C	16 / 10 / 8 bar 1600 / 1000 / 800 kPa	✓ ²⁾	✓	✓	✓		
For natural gases	-20 – +70 °C	1 bar / 100 kPa	✓	✓	✓	✓		
For liquefied gases	-20 – +70 °C	1 bar / 100 kPa	✓	✓	✓	✓		

✓ Application generally approved if the defined additional requirements are met in accordance with the footnotes

¹⁾ Service life with collector downtime: 200 h/a at 180 °C, 60 h/a at 200 °C, total of 500 h/service life at 220 °C

²⁾ 16 bar / 1600 kPa for d12–54, 10 bar / 1000 kPa for d66.7–88.9, 8 bar / 800 kPa for d108

³⁾ Only use approved inhibitors

⁴⁾ Only use approved antifreeze agents

⁵⁾ After Geberit approval

⁶⁾ Oil purity class in accordance with ISO 8573-1:2010E; for details on moisture and particles, see technical information "Geberit Piping Systems for Compressed Air Installations"

	Seal rings				Flat gaskets for screw connections				Flange gaskets
	CIIR, black	EPDM, black	FKM, blue	HNBR, yellow	EPDM, black	FPM, green	Centellen® R WS 3825	Centellen® HD WS 3822	Centellen® HD WS 3822
	✓	✓			✓				✓
	✓ ³⁾	✓ ³⁾			✓ ³⁾				✓
	✓	✓			✓				✓
	✓ ⁴⁾						✓		✓
	✓ ³⁾	✓				✓	✓		✓
	✓ ⁵⁾	✓ ⁵⁾			✓ ⁵⁾				✓ ⁵⁾
			✓			✓			✓
			✓			✓			✓
			✓ ⁵⁾			✓ ⁵⁾			✓ ⁵⁾
	✓ ⁶⁾	✓ ⁶⁾			✓ ⁶⁾				✓
			✓ ⁶⁾			✓ ⁶⁾			✓
	✓	✓							✓
	✓	✓			✓				✓
				✓				✓	✓
				✓				✓	✓

3.2 Geberit Mapress Copper

3.2.1 Couplings

Geberit Mapress Copper coupling



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Copper → p. 158

Characteristics

- Pressing indicator
- Leaky if unpressed up to $\varnothing \leq 54$ mm
- Seal ring made of CIIR, black, up to $\varnothing \leq 54$ mm
- Seal ring made of EPDM, black, from $\varnothing > 54$ mm
- Pressing socket with transparent protection plug

Technical data

Material		Cu-DHP copper CW024A (EN 1412)						
Art. no.	DN	d, \varnothing [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
62001	10	12	4.2	0.8	200	20		1.54
62002	12	15	4.8	0.8	200	20		1.74
62003	15	18	4.8	0.8	100	20		2.17
62004	20	22	5	0.8	200	20		2.61
62005	25	28	5.4	0.8	100	20		4.97
62006	32	35	6.2	1	100	5		6.57
62007	40	42	7.1	1.1	48	4		11.73
62008	50	54	8.3	1.3	48	4		14.56
62010	65	66.7	12.7	2.7	25	5		36.65
62011	65	76.1	12.7	2.1			1	47.23
62012	80	88.9	14.5	2.5			1	53.80
62013	100	108	17.6	2.6			1	79.57

Geberit Mapress Copper coupling, reduced



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Copper → p. 158

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Material		Gunmetal (CuSn5Zn5Pb2-C)							
Art. no.	DN	d, \varnothing [mm]	d1, \varnothing [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
62050	12 / 10	15	12	4	0.3	25	5		7.23
62055	20 / 12	22	15	4.4	0.3		5	1	7.46

Geberit Mapress Copper slip coupling



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Copper → p. 158

Characteristics


- Pressing indicator
- Leaky if unpressed up to $\varnothing \leq 54$ mm
- Seal ring made of CIIR, black, up to $\varnothing \leq 54$ mm
- Seal ring made of EPDM, black, from $\varnothing > 54$ mm
- Pressing socket with transparent protection plug

Technical data

Material		Cu-DHP copper CW024A (EN 1412)								
Art. no.	DN	d, \varnothing [mm]	E [cm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.	
62102	12	15	2.5	8	3	100	20		9.17	
62103	15	18	2.5	8	3	50	10		10.35	
62104	20	22	2.5	8.4	3.4	100	20		10.61	
62105	25	28	3	9.1	3.1	50	10		13.24	
62106	32	35	3	10.2	4.2	50	5		17.61	
62107	40	42	4	12	4	48	4		24.35	
62108	50	54	4	14	6	24	4		26.20	
62110	65	66.7	5	22	12	5		1	53.63	
62111	65	76.1	5.3	23	12.4			1	68.39	
62112	80	88.9	6	26	14			1	92.37	
62113	100	108	7.5	31	16			1	108.46	

3.2.2 Reducers

Geberit Mapress Copper reducer with plain end



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Copper → p. 158

Characteristics

- Pressing indicator
- Leaky if unpressed up to $\varnothing \leq 54$ mm
- Seal ring made of CIIR, black, up to $\varnothing \leq 54$ mm
- Seal ring made of EPDM, black, from $\varnothing > 54$ mm
- Pressing socket with transparent protection plug


Technical data

Material	Cu-DHP copper CW024A (EN 1412)
----------	--------------------------------

Art. no.	DN	d, \varnothing [mm]	d1, \varnothing [mm]	H [cm]	L [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
62301	12 / 10	15	12	3.3	5	100	20		1.54
62302	15 / 10	18	12	3.7	5.4	50	10		1.54
62303	15 / 12	18	15	3.5	5.5	100	20		1.64
62305	20 / 12	22	15	3.9	5.9	200	20		1.89
62306	20 / 15	22	18	3.7	5.7	100	20		1.89
62307	25 / 12	28	15	4.6	6.6	100	10		4.90
62308	25 / 15	28	18	4.4	6.4	50	10		4.90
62309	25 / 20	28	22	3.9	6	200	20		4.90
62312	32 / 20	35	22	5	7.1	50	10		6.29
62313	32 / 25	35	28	4.5	6.8	100	5		6.29
62316	40 / 20	42	22	6	8.1	24	4		10.31
62317	40 / 25	42	28	5.6	7.9	48	4		10.31
62318	40 / 32	42	35	5	7.6	48	4		10.31
62322	50 / 25	54	28	7.4	9.7	24	4		13.44
62323	50 / 32	54	35	7	9.6	48	4		13.44
62324	50 / 40	54	42	6.1	9.2	48	4		13.44
62325	65 / 25	66.7	28	9.7	12			1	40.68
62326	65 / 32	66.7	35	9.5	12.1			1	40.68
62327	65 / 40	66.7	42	9.1	12.1	5		1	40.68
62328	65 / 50	66.7	54	9.2	12.7	5		1	47.87
62329	65 / 32	76.1	35	10	12.6			1	54.71
62330	65 / 40	76.1	42	9.6	12.6			1	54.71
62331	65 / 50	76.1	54	11.1	14.6			1	54.71
62332	65 / 65	76.1	66.7	10.1	15.1			1	54.71
62333	80 / 40	88.9	42	11	14			1	67.42
62334	80 / 50	88.9	54	12.8	16.3			1	67.42
62336	80 / 65	88.9	76.1	10.8	16.1			1	67.42
62337	100 / 40	108	42	14.3	17.3			1	81.70
62338	100 / 50	108	54	13.8	17.3			1	81.70
62339	100 / 65	108	66.7	13.9	18.9			1	88.73
62340	100 / 65	108	76.1	13.1	18.4			1	88.73
62341	100 / 80	108	88.9	14.3	20.3			1	88.73

3.2.3 Bends

Geberit Mapress Copper bend

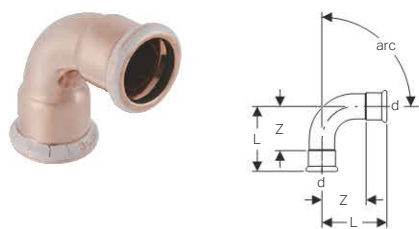

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Copper → p. 158

Characteristics

- Pressing indicator
- Leaky if unpressed up to $\varnothing \leq 54$ mm
- Seal ring made of CIIR, black, up to $\varnothing \leq 54$ mm
- Seal ring made of EPDM, black, from $\varnothing > 54$ mm
- Pressing socket with transparent protection plug


Technical data

Material		Cu-DHP copper CW024A (EN 1412)						
Art. no.	DN	d, \varnothing [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
arc / angle: 45°								
60601	10	12	2.6	0.9	50	10		1.64
60602	12	15	3.6	1.6	100	20		1.71
60603	15	18	2.9	0.9	100	20		2.32
60604	20	22	3.2	1.1	200	20		2.86
60605	25	28	3.7	1.4	100	10		6.01
60606	32	35	4	1.4	100	5		12.42
60607	40	42	4.7	1.7	48	4		23.46
60608	50	54	5.7	2.2	48	4		32.61
60610	65	66.7	9.2	4.2	5		1	69.63
60611	65	76.1	10.3	5			1	90.77
60612	80	88.9	11.7	5.7			1	111.91
60613	100	108	14.5	7			1	136.78
arc / angle: 90°								
60101	10	12	3.1	1.4	200	20		1.64
60102	12	15	3.8	1.8	200	20		1.71
60103	15	18	4.2	2.2	200	20		2.32
60104	20	22	4.7	2.6	100	20		2.86
60105	25	28	5.7	3.4	100	10		6.01
60106	32	35	6.5	3.9	50	5		12.42
60107	40	42	7.6	4.6	50	2		23.46
60108	50	54	9.5	6	30	2		32.61
60110	65	66.7	14.1	9.1	10		1	59.68
60111	65	76.1	15.9	10.6			1	94.50
60112	80	88.9	18.5	12.5			1	111.91
60113	100	108	23	15.5			1	172.84



- Bend 45° / 90° in the dimensions d76.1 / 88.9 / 108 with new masses as of 01.04.2017

Geberit Mapress Copper bend with plain end

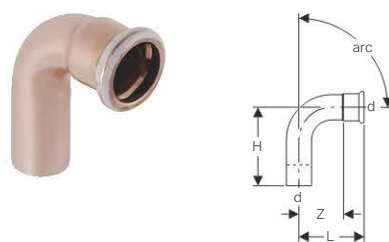

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Copper → p. 158

Characteristics

- Pressing indicator
- Leaky if unpressed up to $\varnothing \leq 54$ mm
- Seal ring made of CIIR, black, up to $\varnothing \leq 54$ mm
- Seal ring made of EPDM, black, from $\varnothing > 54$ mm
- Pressing socket with transparent protection plug


Technical data

Material		Cu-DHP copper CW024A (EN 1412)							
Art. no.	DN	d, \varnothing [mm]	H [cm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
arc / angle: 45°									
60701	10	12	3.5	2.6	0.9	50	10		1.64
60702	12	15	4.5	3.6	1.6	200	20		1.71
60703	15	18	3.9	2.9	0.9	100	20		2.32
60704	20	22	4.4	3.2	1.1	200	20		2.86
60705	25	28	4.5	3.7	1.2	100	10		6.01
60706	32	35	4.9	4	1.4	50	10		12.42
60707	40	42	5.7	4.7	1.7	48	4		23.46
60708	50	54	6.8	5.7	2.2	48	4		32.61
60710	65	66.7	10.1	9.2	4.2			1	82.05
60711	65	76.1	11.1	10.3	5			1	94.50
60712	80	88.9	12.8	11.7	5.7			1	111.91
60713	100	108	15.8	14.5	7			1	136.78
arc / angle: 90°									
60301	10	12	4.5	3.1	1.4	50	10		1.64
60302	12	15	5.1	3.8	1.8	200	20		1.71
60303	15	18	5.3	4.2	2.2	100	20		2.32
60304	20	22	6	4.7	2.6	100	20		2.86
60305	25	28	6.5	5.7	3.4	100	10		6.01
60306	32	35	7.4	6.5	3.9	50	5		12.42
60307	40	42	8.6	7.6	4.6	48	4		23.46
60308	50	54	10.6	9.5	6	24	4		32.61
60310	65	66.7	15	14.1	9.1	5		1	69.63
60311	65	76.1	16.7	15.9	10.6			1	94.50
60312	80	88.9	19.5	18.5	12.5			1	111.91
60313	100	108	24.1	23	15.5			1	172.84



- Bend 45° / 90° in the dimensions d76.1 / 88.9 / 108 with new masses as of 01.04.2017

Geberit Mapress Copper bend with plain ends



Application purposes


- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Copper → p. 158

Technical data

Material	Cu-DHP copper CW024A (EN 1412)
----------	--------------------------------

Art. no.	DN	d, \varnothing [mm]	H [cm]	H1 [cm]	K [cm]	K1 [cm]	SU1 [pc.]	GBP/pc.
arc / angle: 15°								
60905	25	28	4.3	11.9	0	7.6	1	5.79
60906	32	35	4.1	11.8	0	7.7	1	10.85
60907	40	42	4.7	13.7	0	9	1	17.87
60908	50	54	5.5	14.9	0	9.4	1	24.27
arc / angle: 30°								
60935	25	28	4.8	12.4	0	7.6	1	5.79
60936	32	35	4.6	12.3	0	7.7	1	10.85
60937	40	42	5.4	14.4	0	9	1	17.87
60938	50	54	6.3	15.7	0	9.4	1	24.27
arc / angle: 45°								
60875	25	28	4.5	11.8	0	7.3	1	5.79
60876	32	35	4.9	12.6	0	7.7	1	10.85
60877	40	42	5.7	14.7	0	9	1	17.87
60878	50	54	6.8	16.2	0	9.4	1	24.27
arc / angle: 60°								
60955	25	28	6.1	13.7	0	7.6	1	5.79
60956	32	35	5.9	13.6	0	7.7	1	10.85
60957	40	42	6.9	15.9	0	9	1	17.87
60958	50	54	8.3	17.7	0	9.4	1	24.27
arc / angle: 90°								
60082	12	15	5.1	11.8	0	6.7		5.01
60083	15	18	5.3	12.2	0	6.9		5.12
60084	20	22	6	12.8	0	6.8		4.85
60085	25	28	6.5	14	0	7.5		5.79
60086	32	35	7.4	15.1	0	7.7		10.85
60087	40	42	8.6	17.6	0	9		17.87
60088	50	54	10.6	20	0	9.4		24.27

Geberit Mapress Copper pipe bridge

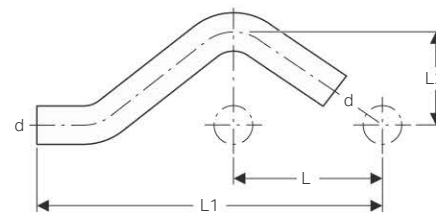

Application purposes

- For crossing parallel pipes with distance L
- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Copper → p. 158

Technical data

Material	Cu-DHP copper CW024A (EN 1412)
----------	--------------------------------


Art. no.	DN	d, \varnothing [mm]	L [cm]	L1 [cm]	L2 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
60801	10	12	4	15.4	3.5			1	4.24
60802	12	15	5.6	15.7	3	25	5		6.49
60803	15	18	6	16.6	3.1		5	1	6.31
60804	20	22	6.5	17.9	3.3		5	1	11.40



- Bend with plain ends 15° / 30° / 45° / 60° / 90° with new masses as of 01.04.2017

3.2.4 T-pieces

Geberit Mapress Copper T-piece, equal



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Copper → p. 158

Characteristics


- Pressing indicator
- Leaky if unpressed up to $\varnothing \leq 54$ mm
- Seal ring made of CIIR, black, up to $\varnothing \leq 54$ mm
- Seal ring made of EPDM, black, from $\varnothing > 54$ mm
- Pressing socket with transparent protection plug

Technical data

Material	Cu-DHP copper CW024A (EN 1412)
----------	--------------------------------

Art. no.	DN	d, \varnothing [mm]	L [cm]	L1 [cm]	I [cm]	Z [cm]	Z1 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
61000	10	12	6.2	3.1	3.1	1.4	1.4	50	10		2.71
61002	12	15	6.4	3.1	3.2	1.2	1.2	100	20		2.92
61003	15	18	6.8	3.4	3.4	1.4	1.4	100	20		3.83
61004	20	22	7.4	3.7	3.7	1.6	1.6	100	20		4.72
61005	25	28	8.4	4.2	4.2	1.9	1.9	50	10		8.75
61006	32	35	10	5.9	5	2.4	3.3	50	10		14.96
61007	40	42	11.4	6.6	5.7	2.7	3.6	40	4		29.55
61008	50	54	13.8	7.8	6.9	3.4	4.3	20	2		37.90
61010	65	66.7	22	10.5	11	6	5.5	5		1	117.08
61011	65	76.1	23	11	11.5	6.2	5.7			1	164.13
61012	80	88.9	26	12.8	13	7	6.8			1	175.26
61013	100	108	31	15.3	15.5	8	7.8			1	223.81

Geberit Mapress Copper T-piece, reduced



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Copper → p. 158

Characteristics

- Pressing indicator
- Leaky if unpressed up to $\varnothing \leq 54$ mm
- Seal ring made of CIIR, black, up to $\varnothing \leq 54$ mm
- Seal ring made of EPDM, black, from $\varnothing > 54$ mm
- Pressing socket with transparent protection plug


Technical data

Material	Cu-DHP copper CW024A (EN 1412)
----------	--------------------------------

Art. no.	DN	d, \varnothing [mm]	d1, \varnothing [mm]	d2, \varnothing [mm]	L [cm]	L1 [cm]	I [cm]	I2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
61243	12 / 10 / 10	15	12	12	6.7	3.3	3.2	3.5	2	1.6	1.7	25	5		4.24
61252	12 / 10 / 12	15	12	15	6.4	3.3	3.2	3.2	1.2	1.6	1.2	50	10		2.71
61104	12 / 20 / 12	15	22	15	7.4	3.4	3.7	3.7	1.7	1.3	1.7		5	1	4.24
61253	15 / 10 / 15	18	12	18	6.8	3.5	3.4	3.4	1.4	1.8	1.4	50	10		3.53
61235	15 / 12 / 12	18	15	15	7.4	3.5	3.4	4	1.4	1.5	2	50	10		3.83

Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	L [cm]	L1 [cm]	I [cm]	I2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
61254	15 / 12 / 15	18	15	18	6.8	3.5	3.4	3.4	1.4	1.5	1.4	50	10		3.83
61236	15 / 15 / 12	18	18	15	7.4	3.4	3.4	4	1.4	1.4	2		5	1	3.83
61244	20 / 10 / 20	22	12	22	7.4	3.5	3.7	3.7	2.1	1.7	2.1	50	10		4.77
61240	20 / 12 / 12	22	15	15	8	3.8	3.7	4.3	1.6	1.8	2.3	50	10		4.24
61256	20 / 12 / 20	22	15	22	7.4	3.8	3.7	3.7	1.6	1.8	1.6	100	20		4.24
61257	20 / 15 / 20	22	18	22	7.4	3.8	3.7	3.7	1.6	1.8	1.6	50	10		4.24
61242	20 / 20 / 12	22	22	15	7.4	3.7	3.7	4.5	1.6	1.6	2.5	50	10		7.57
61259	25 / 12 / 25	28	15	28	8.4	4.1	4.2	4.2	1.9	2.1	1.9	50	10		8.75
61260	25 / 15 / 25	28	18	28	8.4	4.1	4.2	4.2	1.9	2.1	1.9	50	10		8.75
61261	25 / 20 / 25	28	22	28	8.4	4.1	4.2	4.2	1.9	2	1.9	50	10		8.75
61212	32 / 12 / 32	35	15	35	10	5.1	5	5	2.4	3.1	2.4	50	10		14.85
61213	32 / 15 / 32	35	18	35	10	5	5	5	2.4	3	2.4		5	1	15.87
61214	32 / 20 / 32	35	22	35	10	5.2	5	5	2.4	3.1	2.4	50	10		14.85
61215	32 / 25 / 32	35	28	35	10	5.5	5	5	2.4	3.2	2.4	50	10		14.85
61229	40 / 12 / 40	42	15	42	11.4	5.4	5.7	5.7	2.7	3.4	2.7	24	4		27.73
61217	40 / 15 / 40	42	18	42	11.4	5.4	5.7	5.7	2.7	3.4	2.7			1	27.73
61218	40 / 20 / 40	42	22	42	11.4	5.5	5.7	5.7	2.7	3.4	2.7	48	4		27.73
61219	40 / 25 / 40	42	28	42	11.4	5.8	5.7	5.7	2.7	3.5	2.7	48	4		27.73
61220	40 / 32 / 40	42	35	42	11.4	6.2	5.7	5.7	2.7	3.6	2.7	48	4		27.73
61227	50 / 20 / 50	54	22	54	13.8	6.1	6.9	6.9	3.4	4	3.4	30	2		45.28
61228	50 / 25 / 50	54	28	54	13.8	6.4	6.9	6.9	3.4	4.1	3.4	10	2		45.28
61225	50 / 32 / 50	54	35	54	13.8	6.8	6.9	6.9	3.4	4.2	3.4	24	2		45.28
61226	50 / 40 / 50	54	42	54	13.8	7.2	6.9	6.9	3.4	4.2	3.4	10	2		45.28
61280	65 / 20 / 65	66.7	22	66.7	22	6.5	11	11	6	4.4	6	5		1	122.08
61281	65 / 25 / 65	66.7	28	66.7	22	6.8	11	11	6	4.5	6	5		1	122.08
61282	65 / 50 / 65	66.7	54	66.7	22	8.2	11	11	6	4.7	6	5		1	122.08
61283	65 / 20 / 65	76.1	22	76.1	23	7	11.5	11.5	6.2	4.9	6.2			1	139.84
61284	65 / 32 / 65	76.1	35	76.1	23	7.7	11.5	11.5	6.2	5.1	6.2			1	139.84
61285	65 / 40 / 65	76.1	42	76.1	23	8.1	11.5	11.5	6.2	5.1	6.2			1	139.84
61286	65 / 50 / 65	76.1	54	76.1	23	8.7	11.5	11.5	6.2	5.2	6.2			1	139.84
61287	65 / 65 / 65	76.1	66.7	76.1	23	10.8	11.5	11.5	6.2	5.8	6.2			1	139.84
61288	80 / 20 / 80	88.9	22	88.9	26	7.6	13	13	7	5.5	7			1	170.98
61289	80 / 40 / 80	88.9	42	88.9	26	8.7	13	13	7	5.7	7			1	170.98
61290	80 / 50 / 80	88.9	54	88.9	26	9.3	13	13	7	5.8	7			1	170.98
61292	80 / 65 / 80	88.9	76.1	88.9	26	11.4	13	13	7	6.1	7			1	170.98
61293	100 / 20 / 100	108	22	108	31	8.6	15.5	15.5	8	6.5	8			1	186.53
61294	100 / 50 / 100	108	54	108	31	10.3	15.5	15.5	8	6.8	8			1	186.53
61295	100 / 65 / 100	108	66.7	108	31	12.4	15.5	15.5	8	7.4	8			1	211.37
61296	100 / 65 / 100	108	76.1	108	31	12.4	15.5	15.5	8	7.1	8			1	211.37
61297	100 / 80 / 100	108	88.9	108	31	13.5	15.5	15.5	8	7.5	8			1	211.37

Geberit Mapress Copper T-piece with female thread



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Copper → p. 158

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Material		Gunmetal (CuSn5Zn5Pb2-C)													
Art. no.	DN	d, ø [mm]	Rp ["]	d1, ø [mm]	L [cm]	L1 [cm]	I [cm]	I2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
61352	10 / 15 / 10	12	1/2	12	6.8	2.4	3.4	3.4	1.7	1.1	1.7		5	1	8.54
61354	12 / 15 / 12	15	1/2	15	6.8	2.6	3.4	3.4	1.4	1.3	1.4	100	20		8.54
61355	15	18	1/2	18	8.2	2.4	4.1	4.1	2.1	1.1	2.1	50	10		8.54
61357	20 / 15 / 20	22	1/2	22	8.4	2.6	4.2	4.2	2.1	1.3	2.1	50	10		11.70
61395	20	22	3/4	22	9	2.7	4.5	4.5	2.4	1.2	2.4	25	5		11.70
61359	25 / 15 / 25	28	1/2	28	8.8	2.9	4.4	4.4	2.1	1.6	2.1	50	10		17.99
61360	25 / 20 / 25	28	3/4	28	8.4	3.5	4.2	4.2	1.9	2	1.9	25	5		17.99
61362	32 / 15 / 32	35	1/2	35	10	3.5	5	5	2.4	2.2	2.4	50	5		21.86
61366	40 / 15 / 40	42	1/2	42	11.4	3.8	5.7	5.7	2.7	2.5	2.7	24	4		26.85
61370	50 / 15 / 50	54	1/2	54	13.8	4.4	6.9	6.9	3.4	3.1	3.4	20	2		32.61

3.2.5 Pipe crosses

Geberit Mapress Copper pipe cross 30°, reduced

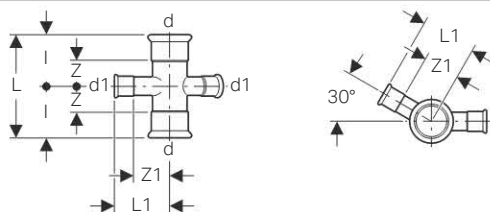

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Copper → p. 158


Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Material		Cu-DHP copper CW024A (EN 1412)										
Art. no.	DN	d, ø [mm]	d1, ø [mm]	L [cm]	L1 [cm]	I [cm]	Z [cm]	Z1 [cm]	SU1 [pc.]	GBP/pc.		
61404	15 / 12	18	15	6.8	4.2	3.4	1.4	2.2	1	18.57		
61406	20 / 12	22	15	7.4	4.4	3.7	1.6	2.4	1	19.62		
61409	25 / 12	28	15	8.4	4.7	4.2	1.9	2.7	1	25.05		

Geberit Mapress Copper pipe cross, reduced, offset

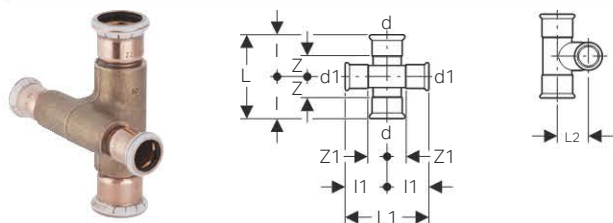

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Copper → p. 158

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Material	Cu-DHP copper CW024A (EN 1412)
----------	--------------------------------

Art. no.	DN	d, \varnothing [mm]	d1, \varnothing [mm]	L [cm]	L1 [cm]	L2 [cm]	I [cm]	I1 [cm]	Z [cm]	Z1 [cm]	SU1 [pc.]	GBP/pc.
61504	12	15	15	10.8	10.8	2.5	5.4	5.4	3.4	3.4	1	18.57
61505	15 / 12	18	15	10.8	10.8	2.5	5.4	5.4	3.4	3.4	1	18.57
61506	20 / 12	22	15	10.8	11	2.5	5.4	5.5	3.4	3.4	1	19.62

3.2.6 Adaptors, permanent

Geberit Mapress Copper adaptor socket



Application purposes

- For connecting copper pipe diameters alien to the system
- For transitions from copper pipes to mild steel pipes
- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Copper → p. 158

Characteristics


- Pressing indicator
- Leaky if unpressed
- \varnothing 14 mm to be pressed with Geberit Mapress pressing jaw \varnothing 15 mm
- \varnothing 16 mm should be pressed with the Geberit Mapress pressing jaw \varnothing 18 mm
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Material	Gunmetal (CuSn5Zn5Pb2-C)
----------	--------------------------

Art. no.	DN	d, \varnothing [mm]	d1, \varnothing [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
62020	12	15	14	4.1	0.1		5	1	13.09
62022	12	15	16	4.1	0.1	25	5		13.09
62024	15	18	16	4.1	0.1			1	13.09

Geberit Mapress Copper adaptor with male thread



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Copper → p. 158

Characteristics


- Pressing indicator
- Leaky if unpressed up to $\varnothing \leq 54$ mm
- Seal ring made of CIIR, black, up to $\varnothing \leq 54$ mm
- Seal ring made of EPDM, black, from $\varnothing > 54$ mm
- Pressing socket with transparent protection plug

Technical data

Material	Gunmetal (CuSn5Zn5Pb2-C)
----------	--------------------------

Art. no.	DN	d, \varnothing [mm]	R ["]	H [cm]	L [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
61701	10	12	3/8	1.5	3.2	50	10		2.29
61745	10 / 15	12	1/2	1.9	3.6	50	10		2.29
61702	12 / 10	15	3/8	1.3	3.3	50	10		2.40
61703	12 / 15	15	1/2	1.6	3.6	200	20		2.40
61714	12 / 20	15	3/4	1.8	3.8	50	10		2.40
61704	15	18	1/2	1.7	3.7	100	20		2.44
61705	15 / 20	18	3/4	1.8	3.8	100	20		2.44
61715	20 / 15	22	1/2	1.7	3.8	100	20		4.10
61707	20	22	3/4	1.8	3.9	200	20		4.10
61716	20 / 25	22	1	2	4.1	100	20		4.10
61717	25 / 20	28	3/4	1.9	4.2	100	20		9.44
61708	25	28	1	2	4.3	100	20		9.44
61718	25 / 32	28	1 1/4	2.1	4.4	50	10		9.44
61719	32 / 25	35	1	2.2	4.8	50	10		19.02
61709	32	35	1 1/4	2.3	4.9	50	10		19.02
61721	40 / 32	42	1 1/4	2.8	5.8	48	4		25.34
61710	40	42	1 1/2	2.8	5.8	48	4		25.34
61711	50	54	2	2.8	6.3	48	4		51.89
61730	65	66.7	2 1/2	4.7	9.7	5		1	109.68
61732	65	76.1	2 1/2	4.8	10.1			1	186.53
61733	65	76.1	3	5.3	10.6			1	186.53
61734	80	88.9	3	5	11			1	221.70

Geberit Mapress Copper adaptor with male thread and plain end



Application purposes


- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Copper → p. 158

Technical data

Material	Gunmetal (CuSn5Zn5Pb2-C)
----------	--------------------------

Art. no.	DN	d, \varnothing [mm]	R ["]	H [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
61932	12 / 15	15	1/2	5.7	5	1	2.01
61933	15	18	1/2	5.7		1	2.44
61935	20 / 15	22	1/2	5.7		1	3.75
61936	20	22	3/4	5.9	5	1	3.75

Geberit Mapress Copper adaptor with female thread



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Copper → p. 158

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Material	Gunmetal (CuSn5Zn5Pb2-C)
----------	--------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
61845	10	12	3/8	3.1	0.4	25	5	2.29
61801	10 / 15	12	1/2	3.5	0.5	50	10	2.29
61846	12 / 10	15	3/8	3.3	0.3	50	10	2.40
61802	12 / 15	15	1/2	3.8	0.5	200	20	2.40
61823	12 / 20	15	3/4	3.9	0.4	50	10	2.40
61803	15	18	1/2	3.7	0.4	100	20	2.44
61804	15 / 20	18	3/4	3.9	0.4	50	10	2.44
61805	20 / 15	22	1/2	3.6	0.2	50	10	4.10
61806	20	22	3/4	3.9	0.3	100	20	4.10
61824	20 / 25	22	1	4.3	0.5	50	10	4.10
61819	25 / 20	28	3/4	3.9	0.3	50	10	9.44
61809	25	28	1	4.5	0.5	100	10	9.44
61825	25 / 32	28	1 1/4	4.8	0.6	25	5	9.44
61820	32 / 25	35	1	4.6	0.3	50	5	19.02
61811	32	35	1 1/4	5	0.5	50	5	19.02
61821	40 / 32	42	1 1/4	5.2	0.3	24	4	25.34
61814	40	42	1 1/2	5.4	0.5	48	4	25.34
61818	50	54	2	6.3	0.5	24	4	51.89

Geberit Mapress Copper adaptor with female thread and plain end



Application purposes


- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Copper → p. 158

Technical data

Material	Gunmetal (CuSn5Zn5Pb2-C)
----------	--------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	H [cm]	L [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
63558	12 / 15	15	1/2	3.3	4.6	5	1	3.00
63559	15	18	1/2	3.3	4.6		1	3.66
63560	15 / 20	18	3/4	3.3	4.8		1	3.66
63561	20 / 15	22	1/2	3.3	4.6	5	1	5.88
63562	20	22	3/4	3.4	4.9	5	1	5.88
63564	32 / 25	35	1	4.6	6.3		1	20.75
63565	50	54	2	6.2	8.5		1	29.03

Geberit Mapress Copper elbow adaptor 90° with male thread



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Copper → p. 158

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Material	Gunmetal (CuSn5Zn5Pb2-C)
----------	--------------------------

Art. no.	DN	d, ø [mm]	R ["]	H [cm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
63892	10	12	3/8	2.5	3	1.3			1	8.23
63893	10 / 15	12	1/2	3.1	3.2	1.5			1	8.23
63894	12 / 10	15	3/8	2.7	3.2	1.2			1	9.02
63873	12 / 15	15	1/2	3.1	3.5	1.5	50	10		9.02
63884	15	18	1/2	3.4	3.5	1.5	25	5		11.28
63895	15 / 20	18	3/4	3.3	3.8	1.8		5	1	11.28
63885	20	22	3/4	4.4	4.8	2.7	50	10		14.54
63886	25	28	1	5.3	5.8	3.5	25	5		20.71
63887	32	35	1 1/4	4.7	5.5	2.9			1	31.88
63888	40	42	1 1/2	5.1	6.2	3.2			1	52.06
63889	50	54	2	6.3	7	3.5			1	66.38

Geberit Mapress Copper elbow adaptor 90° with female thread



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Copper → p. 158

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug


Technical data

Material	Gunmetal (CuSn5Zn5Pb2-C)
----------	--------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	L1 [cm]	Z [cm]	Z1 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
63860	10	12	3/8	3.2	2.3	1.5	1.3			1	8.00
63861	10 / 15	12	1/2	3.4	2.4	1.7	1.1			1	8.00
63862	12 / 10	15	3/8	3.3	2.4	1.3	1.4			1	9.02
63853	12 / 15	15	1/2	3.6	2.7	1.6	1.4	50	10		9.02
63854	15	18	1/2	3.6	3	1.6	1.7	25	5		11.28
63863	15 / 20	18	3/4	3.8	3.1	1.8	1.6			1	11.28
63864	20 / 15	22	1/2	3.8	3.2	1.7	1.9			1	14.54
63855	20	22	3/4	4.5	2.7	2.4	1.2	25	5		14.54
63856	25	28	1	5.1	3.3	2.8	1.6	25	5		19.84
63857	32	35	1 1/4	5.5	4.5	2.9	2.6			1	31.88
63865	40	42	1 1/2	6.7	5.2	3.7	3.3			1	52.06
63866	50	54	2	7.4	6	3.9	3.7			1	66.38

3.2.7 Adaptors and connections, detachable

Geberit adaptor MeplaFix with male thread



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Copper → p. 158

Characteristics

- Male thread for connection of Geberit MeplaFix adaptor
- MeplaFix connection with blue protective cap

Technical data


Material	Gunmetal (CuSn5Zn5Pb2-C)
----------	--------------------------

Art. no.	DN	R ["]	R1 ["]	H [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
632.007.00.1	15	1/2	MF 1/2	4.2	10	1	7.95
632.008.00.1	15 / 20	3/4	MF 1/2	4.2	10	1	10.85

Accessories

- Geberit MeplaFix adaptor → p. 172

Geberit adaptor MeplaFix with male thread



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Copper → p. 158

Characteristics


- Male thread for connection of Geberit MeplaFix adaptor
- MeplaFix connection with blue protective cap
- Flat gasket made of Centellen® R WS 3825

Technical data

Material	Gunmetal (CuSn5Zn5Pb2-C)
----------	--------------------------

Art. no.	DN	R ["]	G ["]	L [cm]	L1 [cm]	l1 [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
632.006.00.1	15	MF 1/2	1/2	3.8	2.3	0.8	50	10	5.40

Geberit MeplaFix adaptor



Application purposes


- For Geberit fittings with male thread MeplaFix

Technical data

Material	Brass CW617N
----------	--------------

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
632.001.00.1	15	MF20	1/2	2.6	100	10	1	3.03

Geberit Mepla adaptor to Geberit Mapress, with plain end



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Copper → p. 158

Characteristics


- Leaky if unpressed
- O-ring made of EPDM
- Pressing nipple with transparent protective cap

Technical data

Material	Gunmetal (CuSn5Zn5Pb2-C)
----------	--------------------------

Art. no.	DN	d, ø [mm]	d1, ø [mm]	L [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
601.508.00.5	12	16	15	5.9	1.2		50	10		7.78
602.507.00.5	15	20	15	6.1	1.1		50	10	1	7.78
602.508.00.5	15	20	18	6.1	1.2		50	10		7.78
602.509.00.5	15	20	22	6.2	1.2		50	10	1	7.78
603.508.00.5	20	26	22	6.7	1.2		25	5		12.12
604.508.00.5	25	32	28	6.6	1.3		25	5		13.73
605.508.00.5	32	40	35	7.5	1.3		25	5		17.15
606.508.00.5	40	50	42	10.1	3.1	480	10	2		33.89
607.508.00.5	50	63	54	13.6	3.2	180	10		1	52.19

Geberit Mapress Copper adaptor to MeplaFix



Application purposes

- For tool-free connection to elements, mounting plates and connections compatible with MeplaFix
- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Copper → p. 158

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- O-ring made of EPDM
- Pressing socket with transparent protection plug
- MeplaFix plug-in nipple with blue protective sleeve

Technical data

Maximum operating pressure	10 bar
Operating temperature	0–95 °C
Material	Gunmetal (CuSn5Zn5Pb2-C)

Art. no.	DN	d, ø [mm]	d1, ø [mm]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
61751	12	15	MF20	5	0.9	1	6.01

Geberit Mapress Copper elbow adaptor 90° to MeplaFix



Application purposes

- For tool-free connection to elements, mounting plates and connections compatible with MeplaFix
- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Copper → p. 158

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- O-ring made of EPDM
- Pressing socket with transparent protection plug
- MeplaFix plug-in nipple with blue protective sleeve

Technical data

Maximum operating pressure	10 bar
Operating temperature	0–95 °C
Material	Gunmetal (CuSn5Zn5Pb2-C)

Art. no.	DN	d, ø [mm]	d1, ø [mm]	L [cm]	L1 [cm]	Z [cm]	Z1 [cm]	SU1 [pc.]	GBP/pc.
61851	12	15	MF20	4	3.3	2.5	1.3	1	11.55

Geberit Mapress Copper adaptor with MeplaFix adaptor



Application purposes

- For tool-free connection to elements, mounting plates and connections compatible with MeplaFix
- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Copper → p. 158

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- O-ring made of EPDM
- Pressing socket with transparent protection plug
- MeplaFix with blue protective sleeve

Technical data

Maximum operating pressure	10 bar
Operating temperature	0–95 °C
Material	Gunmetal (CuSn5Zn5Pb2-C)

Art. no.	DN	d, Ø [mm]	d1, Ø [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
61756	12	15	MF20	5	0.9	50	10	6.83

Geberit Mapress Copper adaptor with MeplaFix adaptor and plain end



Application purposes

- For tool-free connection to elements, mounting plates and connections compatible with MeplaFix
- Suitable exclusively for pressing in Geberit Mapress pressing sockets
- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Copper → p. 158

Characteristics


- O-ring made of EPDM
- MeplaFix with blue protective sleeve

Technical data

Maximum operating pressure	10 bar
Operating temperature	0–95 °C
Material	Gunmetal (CuSn5Zn5Pb2-C)

Art. no.	DN	d, Ø [mm]	d1, Ø [mm]	H [cm]	L [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
61757	12	15	MF20	3.2	5	25	5	11.50

Geberit Mapress Copper elbow adaptor 90° with MeplaFix adaptor



Application purposes

- For tool-free connection to elements, mounting plates and connections compatible with MeplaFix
- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Copper → p. 158

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- O-ring made of EPDM
- Pressing socket with transparent protection plug
- MeplaFix with blue protective sleeve

Technical data

Maximum operating pressure	10 bar
Operating temperature	0–95 °C
Material	Gunmetal (CuSn5Zn5Pb2-C)

Art. no.	DN	d, ø [mm]	d1, ø [mm]	L [cm]	L1 [cm]	Z [cm]	Z1 [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
61856	12	15	MF20	4	3.3	2.5	1.3	50	10	14.03

Geberit Mapress Copper elbow adaptor 90° with MeplaFix adaptor and plain end



Application purposes

- For tool-free connection to elements, mounting plates and connections compatible with MeplaFix
- Suitable exclusively for pressing in Geberit Mapress pressing sockets
- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Copper → p. 158

Characteristics


- O-ring made of EPDM
- MeplaFix with blue protective sleeve

Technical data

Maximum operating pressure	10 bar
Operating temperature	0–95 °C
Material	Gunmetal (CuSn5Zn5Pb2-C)

Art. no.	DN	d, ø [mm]	d1, ø [mm]	H [cm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
61857	12	15	MF20	3.3	4	2.5	25	5	12.34

Geberit Mapress Copper adaptor union with male thread



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Copper → p. 158

Characteristics


- Pressing indicator
- Leaky if unpressed
- Union nut made of brass
- Seal ring made of CIIR, black
- Flat gasket made of EPDM
- Pressing socket with transparent protection plug

Technical data

Media temperature with flat gasket EPDM	0–100 °C
Material	Gunmetal (CuSn5Zn5Pb2-C)

Art. no.	DN	d, ø [mm]	R ["]	G ["]	H [cm]	L [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
65531	10	12	3/8	1/2	3.4	5.1		5	1	11.86
65540	10 / 15	12	1/2	1/2	3.8	5.5		5	1	11.86
65532	12 / 15	15	1/2	3/4	4.1	6.1	50	5		16.43
65541	12 / 20	15	3/4	3/4	4.3	6.3		5	1	12.79
65533	15	18	1/2	3/4	4.1	6.1	50	5		14.64
65542	15 / 20	18	3/4	3/4	4.3	6.3	25	5		14.64
65534	20 / 15	22	1/2	1	4.6	6.7		5	1	15.26
65543	20	22	3/4	1	4.7	6.8	50	5		24.31
65544	20 / 25	22	1	1	4.8	6.9	25	5		15.26
65535	25	28	1	1 1/4	5.2	7.5	25	5		27.00
65536	32	35	1 1/4	1 1/2	5.4	8	25	5		31.16
65537	40	42	1 1/2	1 3/4	5.5	8.5	24	4		41.53
65538	50	54	2	2 3/8	6.2	9.7	10		1	68.96

Geberit Mapress Copper adaptor union with female thread



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Copper → p. 158

Characteristics


- Pressing indicator
- Leaky if unpressed
- Union nut made of brass
- Seal ring made of CIIR, black
- Flat gasket made of EPDM
- Pressing socket with transparent protection plug

Technical data

Media temperature with flat gasket EPDM	0–100 °C
Material	Gunmetal (CuSn5Zn5Pb2-C)

Art. no.	DN	d, ø [mm]	Rp ["]	G ["]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
65481	10 / 15	12	1/2	1/2	5.2	2.2			1	11.86
65482	12 / 15	15	1/2	3/4	5	1.7	25	5		16.43
65490	12 / 20	15	3/4	3/4	5.9	2.4			1	12.79
65483	15	18	1/2	3/4	5	1.7		5	1	14.64
65491	15 / 20	18	3/4	3/4	5.9	2.4		5	1	14.64
65484	20	22	3/4	1	6.2	2.6	50	5		24.31
65492	20 / 25	22	1	1	6.6	2.8		5	1	15.26
65485	25	28	1	1 1/4	6.3	2.3	25	5		27.00
65486	32	35	1 1/4	1 1/2	7.5	3	25	5		31.16
65487	40	42	1 1/2	1 3/4	7.9	3		5	1	41.53
65488	50	54	2	2 3/8	8.5	2.7		5	1	68.96

Geberit Mapress Copper elbow adaptor union 90° with female thread



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Copper → p. 158

Characteristics


- Pressing indicator
- Leaky if unpressed
- Union nut made of brass
- Seal ring made of CIIR, black
- Flat gasket made of EPDM
- Pressing socket with transparent protection plug

Technical data

Media temperature with flat gasket EPDM	0–100 °C
Material	Gunmetal (CuSn5Zn5Pb2-C)

Art. no.	DN	d, ø [mm]	Rp ["]	G ["]	L [cm]	L1 [cm]	Z [cm]	Z1 [cm]	SU1 [pc.]	GBP/pc.
65382	12 / 15	15	1/2	3/4	5.7	3.2	3.7	1.9	1	18.62
65392	15	18	1/2	3/4	5.7	3.2	3.7	1.9	1	19.39
65384	20	22	3/4	1	6.4	3.6	4.3	2.1	1	26.07
65385	25	28	1	1 1/4	7.2	4.4	4.9	2.7	1	29.55
65386	32	35	1 1/4	1 1/2	8	5	5.4	3.1	1	39.69
65387	40	42	1 1/2	1 3/4	8.7	5.3	5.7	3.4	1	55.96
65388	50	54	2	2 3/8	10.1	6.4	6.6	4.1	1	76.96

Geberit Mapress Copper adaptor with union nut



Application purposes

- Suitable exclusively for threads with an inner diameter of ≤ 41 mm
- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Copper → p. 158

Characteristics

- Pressing indicator
- Leaky if unpressed up to ø ≤ 54 mm
- Union nut made of brass

- Seal ring made of CIIR, black, up to ø ≤ 54 mm
- Seal ring made of EPDM, black, from ø > 54 mm
- Flat gasket made of EPDM
- Pressing socket with transparent protection plug

Technical data

Media temperature with flat gasket EPDM	0–100 °C
Material	Gunmetal (CuSn5Zn5Pb2-C)


Art. no.	DN	d, ø [mm]	G ["]	di, ø [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
65081	10	12	1/2	10	3.2	0.9			1	4.42
65182	12	15	1/2	10	5.1	2.5	50	5		4.77
65082	12	15	3/4	13	3.7	1.1	50	10		4.77
65083	15	18	3/4	13	3.7	1.1	50	10		5.05
65040	15	18	1	20	3.9	1.3			1	5.05
65084	20	22	1	20	4	1.1	50	10		7.76
65044	20	22	1 1/4	26	4.3	1.3		5	1	7.76
65045	20	22	1 1/2	32	4.4	1.3		5	1	7.76
65046	25	28	1	20	4	1.3	25	5		8.20
65085	25	28	1 1/4	26	4.4	1.3	50	10		8.20
65050	25	28	1 1/2	32	4.6	1.3		5	1	8.20
65086	32	35	1 1/2	32	4.8	1.3	50	10		9.56
65051	32	35	2	42	4.8	1.2			1	15.31
65087	40	42	1 3/4	39	5.2	1.3	24	4		18.16
65052	40	42	2	42	5.4	1.4			1	18.16
65053	40	42	2 1/4	42	5.6	1.4			1	18.16
65088	50	54	2 3/8	51	5.8	1.5	24	4		25.87
65054	50	54	2 1/2	54	6.3	1.4			1	25.87
65090	65	76.1	3	73	9.1	2.5			1	231.77
65091	80	88.9	3 1/2	84	9.8	2.4			1	231.77

Geberit Mapress Copper

Geberit Mapress Copper

Adaptors and connections, detachable

Geberit Mapress adaptor union with clamping ring for corrugated pipes, NPW, plain end

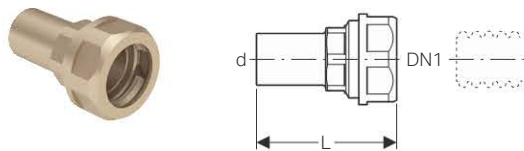

Application purposes


- For heating water
- For cooling water without antifreeze agent
- For cooling water with antifreeze agent
- Only suitable for liquid media

Technical data

Material	DR brass CW602N
----------	-----------------

Art. no.	DN	DN	d, \emptyset [mm]	L [cm]	PN [bar]	SU2 [pc.]	GBP/pc.
22421	12	16	15	6.4	10	2	12.91
22431	12	20	15	6.7	10	2	15.06
22422	15	16	18	6.4	10	2	13.99
22432	15	20	18	6.7	10	2	16.14
22423	20	16	22	6.8	10	2	15.06
22433	20	20	22	6.8	10	2	17.20
22444	25	25	28	6.8	10	2	23.66

Geberit Mapress Copper flanged stub with plain end, for loose flange PN 1016

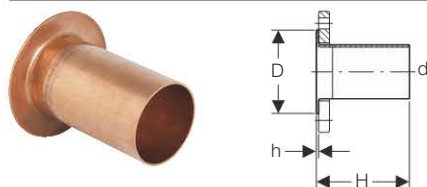

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Copper → p. 158

Characteristics

- Suitable for loose flange, in accordance with EN 1092-1, flange type 02

Technical data

Material	Cu-DHP copper CW024A (EN 1412)
----------	--------------------------------

Art. no.	DN	d, \emptyset [mm]	D [cm]	H [cm]	h [cm]	PN [bar]	SU1 [pc.]	GBP/pc.
63710	65	66.7	12.2	14.2	0.2	10 / 16	1	143.15
63711	65	76.1	12.2	14.5	0.2	10 / 16	1	153.53
63712	80	88.9	13.8	15.2	0.2	10 / 16	1	179.60
63713	100	108	15.8	17.4	0.3	10 / 16	1	223.21


To order additionally

- Loose flange

Accessories

- Geberit flange gasket PN 10/16 → p. 95
- Geberit bolt set for flange connection, made of CrNi steel → p. 96

Geberit Mapress loose flange PN 10/16



Application purposes

- For Geberit Mapress Copper flanged stubs with plain end

Characteristics

- Zinc-plated

Technical data

Material	Non-alloy steel 1.0215 E220 (EN 10305)
----------	--


Art. no.	DN	di, \varnothing [mm]	D [cm]	k [mm]	m [mm]	H [cm]	n [pc.]	PN [bar]	SU1 [pc.]	GBP/pc.
23719	65	82	18.5	145	18	1.6	4	10 / 16	1	49.61
23720	80	96	20	160	18	1.8	8	10 / 16	1	61.59
23721	100	119	22	180	18	1.8	8	10 / 16	1	81.41

Accessories

- Geberit bolt set for flange connection, made of CrNi steel → p. 96
- Geberit bolt set for flange connection, made of steel zinc-plated → p. 152

3.2.8 Sealings

Geberit Mapress Copper cap



Application purposes

- For technical building systems, industry and shipbuilding
- For permanent termination of pipe ends
- Application overview: Geberit Mapress Copper → p. 158

Characteristics

- Pressing indicator
- Leaky if unpressed up to $\varnothing \leq 54$ mm
- Seal ring made of CIIR, black, up to $\varnothing \leq 54$ mm
- Seal ring made of EPDM, black, from $\varnothing > 54$ mm
- Pressing socket with transparent protection plug


Technical data

Material	Cu-DHP copper CW024A (EN 1412)
----------	--------------------------------

Art. no.	DN	d, \varnothing [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
60231	10	12	2	0.3	50	10		3.18
60232	12	15	2.3	0.3	100	20		3.34
60233	15	18	2.3	0.3	50	10		4.19
60234	20	22	2.5	0.4	50	10		5.57
60235	25	28	2.7	0.4	50	10		8.61
60236	32	35	3	0.4	25	5		10.09
60237	40	42	3.4	0.4		5	1	15.60
60238	50	54	3.9	0.4		5	1	20.32
60239	65	66.7	5.9	0.9			1	46.16
60240	65	76.1	6.4	1.1			1	53.28
60241	80	88.9	7.1	1.1			1	64.74
60242	100	108	8.6	1.1			1	88.43

3.2.9 Connections

Geberit tap connector, straight, for MeplaFix

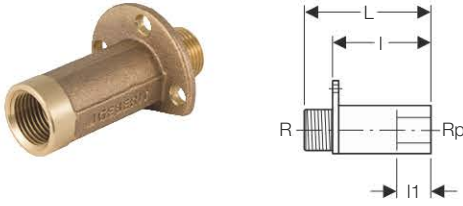

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Copper → p. 158

Characteristics

- Male thread
- Male thread for connection of Geberit MeplaFix adaptor
- Three fastening points
- MeplaFix connection with blue protective cap

Technical data


Material	Gunmetal (CuSn5Zn5Pb2-C)
----------	--------------------------

Art. no.	DN	R ["]	Rp ["]	L [cm]	I [cm]	I1 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
602.283.00.1	15	MF 1/2	1/2	7.9	5.7	2.7	50	10	1	11.44

Accessories

- Geberit MeplaFix adaptor → p. 172
- Sound insulation base for Geberit tap connector, straight → p. 205

Geberit tap connector set, straight, pre-mounted, for MeplaFix, drywall construction

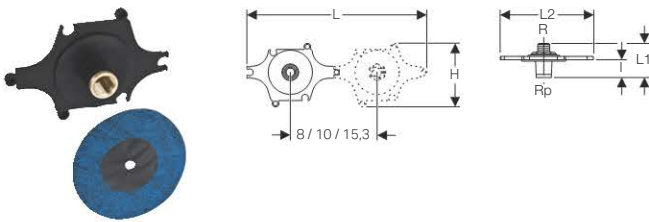

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Copper → p. 158

Characteristics

- Sound-absorbing
- Male thread
- Male thread for connection of Geberit MeplaFix adaptor
- MeplaFix connection with blue protective cap

Technical data

Material	Gunmetal (CuSn5Zn5Pb2-C)
----------	--------------------------

Scope of delivery


- Insulating sleeve
- Drilling template
- Sealing washer
- Fastening material

Art. no.	DN	R ["]	Rp ["]	H [cm]	L [cm]	L1 [cm]	L2 [cm]	I [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
602.295.00.1	15	MF 1/2	1/2	11	31.6	6	16.5	3.1	20	2	18.56

Accessories

- Geberit MeplaFix adaptor → p. 172
- Geberit mounting aid set for straight connector, for drywall construction → p. 211

Geberit Mapress Copper elbow tap connector 90°



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Copper → p. 158

Characteristics



- Pressing indicator
- Leaky if unpressed
- Three fastening points
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Material	Gunmetal (CuSn5Zn5Pb2-C)
----------	--------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	l [cm]	l1 [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
L1 / length: 3.6 cm											
63458	10 / 15	12	1/2	3.4	1.8	1.8	1.7		5	1	14.00
63459	12 / 15	15	1/2	3.8	1.8	1.8	1.8	50	10		9.94
63460	15	18	1/2	3.8	1.8	1.8	1.8	25	5		15.12
L1 / length: 5.2 cm											
63452	10 / 15	12	1/2	3.4	1.8	3.4	1.7	25	5		15.11
63453	12 / 15	15	1/2	3.4	1.8	3.4	1.4	50	10		9.94
63455	15	18	1/2	3.4	1.8	3.4	1.4		5	1	15.08
63457	20	22	3/4	3.7	2.2	3	1.6	25	5		16.60

Geberit Mapress Copper double elbow tap connector 90°



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Copper → p. 158

Characteristics


- Pressing indicator
- Leaky if unpressed
- Four fastening points
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Material	Gunmetal (CuSn5Zn5Pb2-C)
----------	--------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	d1, ø [mm]	a [cm]	L1 [cm]	l [cm]	l1 [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
L / length: 5.2 cm											
63462	12	15	1/2	15	5	5	1.8	2.4	3	1	30.48
63463	15	18	1/2	18	5	5	2	2.4	3	1	33.39
63464	20	22	1/2	22	5	5	1.8	2.4	2.9	1	37.10

Geberit elbow tap connector 90° for MeplaFix

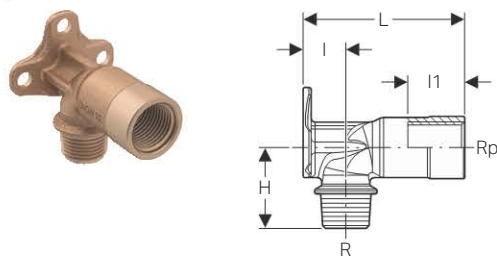

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Copper → p. 158

Characteristics

- Male thread
- Male thread for connection of Geberit MeplaFix adaptor
- Three fastening points
- MeplaFix connection with blue protective cap

Technical data

Material	Gunmetal (CuSn5Zn5Pb2-C)
----------	--------------------------


Art. no.	DN	R ["]	Rp ["]	H [cm]	I [cm]	I1 [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
L / length: 5.7 cm										
602.285.00.1	15	MF 1/2	1/2	3.5	1.8	3	2500	50	10	8.64
L / length: 7 cm										
602.287.00.1	P 15	MF 1/2	1/2	3.5	1.8	3		50	10	10.55

P: Phase out

Accessories

- Geberit MeplaFix adaptor → p. 172

Geberit Mapress Copper elbow tap connector 90° pre-mounted, double

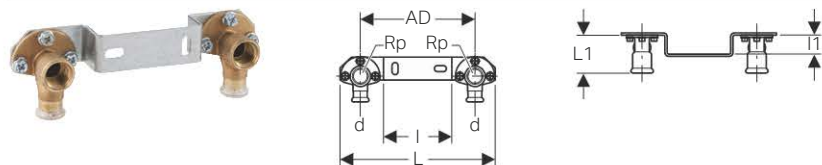

Application purposes

- For potable water
- Application overview: Geberit Mapress Copper → p. 158

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Material	Gunmetal (CuSn5Zn5Pb2-C)
----------	--------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	AD [cm]	L [cm]	I [cm]	I1 [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
L1 / length: 3.6 cm										
63473	12	15	1/2	15.3	20.5	9	1.8	10	1	33.92

Geberit elbow tap connector 90° pre-mounted, single, for MeplaFix

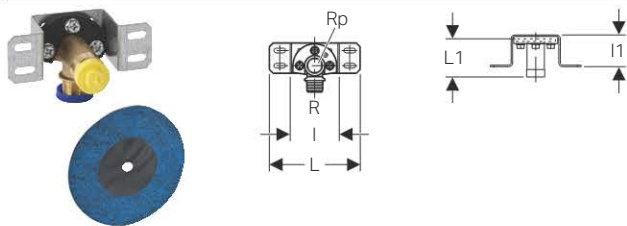

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Copper → p. 158

Characteristics

- Self-adhesive sealing washer, fleece-laminated
- Sound-absorbing
- Male thread
- Male thread for connection of Geberit MeplaFix adaptor
- MeplaFix connection with blue protective cap
- Protection plug for one-time pressure test with cold water up to a maximum of 15 bar / 1500 kPa

Technical data

Material	Gunmetal (CuSn5Zn5Pb2-C)
----------	--------------------------

Scope of delivery


- Sealing washer
- Protection plug
- Fastening material

Art. no.	DN	R ["]	Rp ["]	L [cm]	I [cm]	I1 [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
L1 / length: 5.7 cm									
632.856.00.1	15	MF 1/2	1/2	12	6.5	4	10	1	28.02

Accessories

- Geberit MeplaFix adaptor → p. 172

Geberit elbow tap connector 90° pre-mounted, double, for MeplaFix

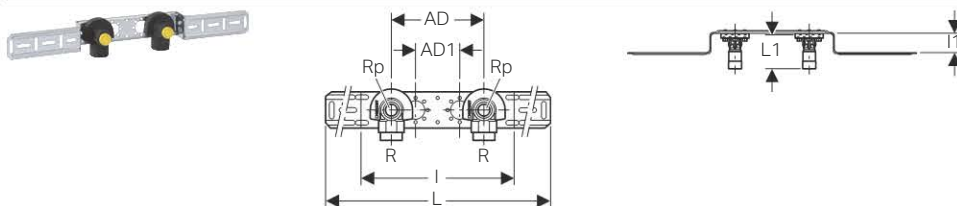

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Copper → p. 158

Characteristics

- Sound-absorbing
- Male thread
- Male thread for connection of Geberit MeplaFix adaptor
- MeplaFix connection with blue protective cap
- Protection plug for one-time pressure test with cold water up to a maximum of 15 bar / 1500 kPa
- Connecting distance AD can be changed to AD1

Technical data

Material	Gunmetal (CuSn5Zn5Pb2-C)
----------	--------------------------

Scope of delivery

- 2 protection plugs
- Fastening material


Art. no.	DN	R ["]	Rp ["]	AD [cm]	AD1 [cm]	L [cm]	I [cm]	I1 [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
L1 / length: 5.2 cm												
632.859.00.1	15	MF 1/2	1/2	15.3	7.3	59.7	25.3	4	140	5	1	46.56

Accessories

- Geberit MeplaFix adaptor → p. 172
- Drain pipe bracket for Geberit mounting plates → p. 93

3.2.10 T-pieces for heating

Geberit Mapress T-piece crossing with insulation box

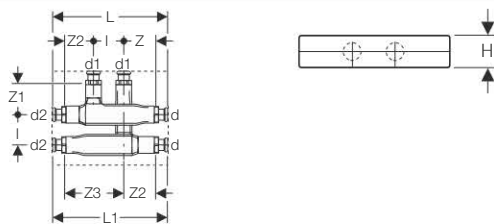

Application purposes

- For connecting to two parallel pipes without intersecting
- Exclusively suitable for heating and cooling
- Application overview: Geberit Mapress Copper → p. 158

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug


Technical data

Material	DR brass
Material, insulation	EPP
Insulation thickness	8.5 mm
Thermal conductivity, insulation	0.038 W/(m · K)

Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	H [cm]	L [cm]	L1 [cm]	I [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	Z3 [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
63113	12 / 12 / 12	15	15	15	5	19	19	5	4.8	5.2	5.3	9.8	5	1	19.85
63115	15 / 12 / 15	18	15	18	5	19	19	5	4.8	5.2	5.3	9.8	5	1	57.69
63117	20 / 12 / 20	22	15	22	5	19.2	19.2	5	4.8	5.2	5.3	9.8	5	1	60.42
63118	20 / 15 / 20	22	18	22	5	19.2	19.2	5	4.8	5.2	5.3	9.8	5	1	60.42

3.2.11 Connections for heating

Geberit Mapress metal pipe connector bend 90° with union connector for Euro cone



Application purposes

- For connecting radiator valves
- Exclusively suitable for heating and cooling
- Application overview: Geberit Mapress Copper → p. 158

Characteristics

- Pressing indicator
- Leaky if unpressed
- Nickel-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Material	Brass / copper
----------	----------------

Scope of delivery

- Union connector for Euro cone G 3/4"

Art. no.	DN	d, ø [mm]	d1, ø [mm]	L [cm]	L1 [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
63120	12	15	15	10.2	30	8.2	20	2	7.22


Accessories

- Insulation box for Geberit metal pipe connector bend and connector T-pieces → p. 206



- Tighten the union as far as it will go

Geberit Mapress connector box type C

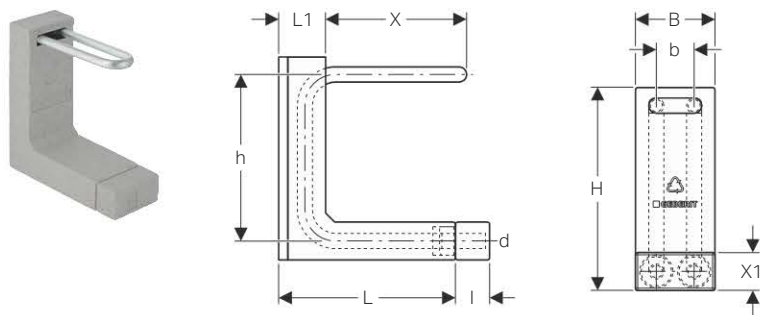

Application purposes

- Exclusively suitable for heating and cooling
- Application overview: Geberit Mapress Copper → p. 158

Characteristics

- System pipe, outside nickel-plated
- For pressure test without radiator

Technical data


Material	Copper
Material, insulation	EPS
Insulation thickness	13 mm
Thermal conductivity, insulation	0.031 W/(m · K)

Art. no.	DN	d, \emptyset [mm]	B [cm]	b [cm]	H [cm]	h [cm]	L [cm]	L1 [cm]	I [cm]	X [cm]	X1 [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
63108	12	15	10.5	5	27	22	22.3	6.3	4.5	17.6	5	10	1	20.94

Accessories

- Geberit union connector for Euro cone → p. 188

Geberit Mapress connector box type L

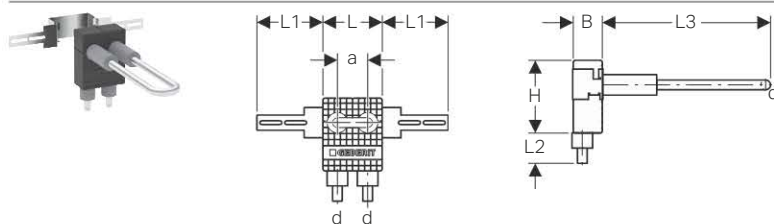

Application purposes

- Exclusively suitable for heating and cooling
- Application overview: Geberit Mapress Copper → p. 158

Characteristics

- System pipe, outside nickel-plated
- For pressure test without radiator

Technical data

Material	Copper
Material, insulation	PUR
Insulation thickness	7 mm
Thermal conductivity, insulation	0.038 W/(m · K)

Scope of delivery


- Installation sheet

Art. no.	DN	d, \emptyset [mm]	a [cm]	B [cm]	H [cm]	L [cm]	L1 [cm]	L2 [cm]	L3 [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
63109	12	15	5	5	12	10	11	5	25	10	1	27.30

Accessories

- Geberit union connector for Euro cone → p. 188

Geberit Mapress Copper connector T-piece set for return flow

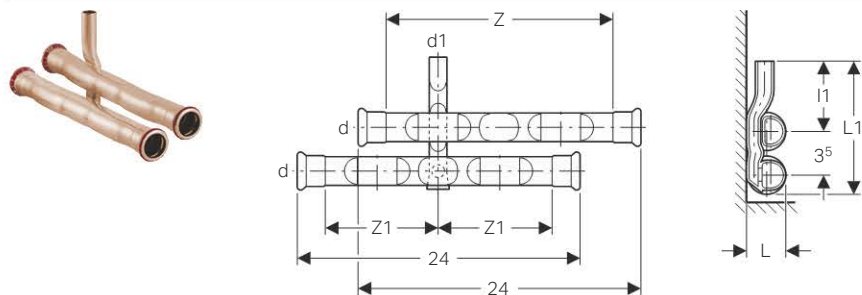

Application purposes

- For skirting board systems
- Exclusively suitable for heating and cooling
- Application overview: Geberit Mapress Copper → p. 158

Characteristics

- Pressing indicator
- Leaky if unpressed
- Outside copper-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data


Material	Non-alloy steel 1.0034 E195 (EN 10305)
----------	--

Scope of delivery

- Connector T-piece with long connection
- Socket, offset, long

Art. no.	DN	d, ø [mm]	d1, ø [mm]	L [cm]	L1 [cm]	l1 [cm]	Z [cm]	Z1 [cm]	SU1 [pc.]	GBP/pc.
23615	12	15	15	2.7	10.8	6.5	20	10	1	32.44
23617	20 / 12	22	15	3.3	11.2	6.5	20	10	1	38.79

Geberit Mapress Copper connector T-piece set for inlet and return flow

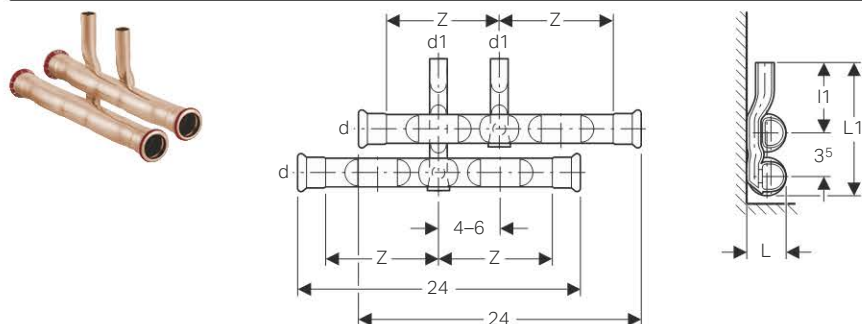

Application purposes

- For skirting board systems
- Exclusively suitable for heating and cooling
- Application overview: Geberit Mapress Copper → p. 158

Characteristics

- Pressing indicator
- Leaky if unpressed
- Inlet and return flow exchangeable
- Outside copper-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data


Material	Non-alloy steel 1.0034 E195 (EN 10305)
----------	--

Scope of delivery

- Connector T-piece with short connection
- Connector T-piece with long connection

Art. no.	DN	d, ø [mm]	d1, ø [mm]	L [cm]	L1 [cm]	l1 [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
24005	12	15	15	2.7	10.8	6.5	10	1	31.80
24006	15 / 12	18	15	2.9	11	6.5	10	1	32.49
24007	20 / 12	22	15	3.3	11.2	6.5	10	1	38.02

Geberit Mapress Copper connector T-piece set for inlet and return flow, with union connector for Euro cone

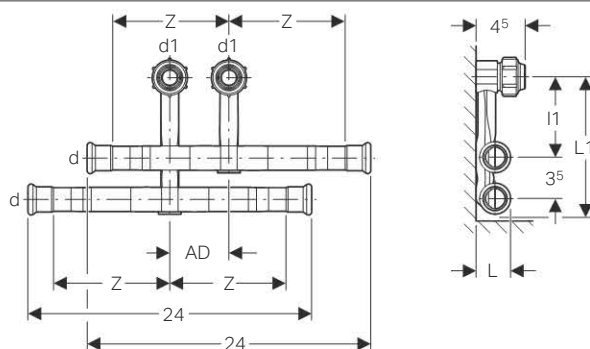

Application purposes

- For skirting board systems
- Exclusively suitable for heating and cooling
- Application overview: Geberit Mapress Copper → p. 158

Characteristics

- Pressing indicator
- Leaky if unpressed
- Inlet and return flow exchangeable
- Outside copper-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug
- Union connector for Geberit Mapress Stainless Steel 1.4401 system pipes

- Union connector for Geberit Mapress Carbon Steel system pipes
- Union connector for copper pipes, rough, nickel-plated and chrome-plated
- Installation completely in front of the wall

Technical data

Material	Non-alloy steel 1.0034 E195 (EN 10305)
----------	--

Scope of delivery


- Connector T-piece with short connection
- Connector T-piece with long connection
- 2 union connectors for Euro cone G 3/4"

Art. no.	DN	d, Ø [mm]	d1, Ø [mm]	AD [cm]	L [cm]	L1 [cm]	I1 [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
24052	12	15	15	5	2.7	12.6	6.8	10	1	46.84
24053	15 / 12	18	15	5	2.9	12.7	6.8	10	1	48.23
24054	20 / 12	22	15	5	3.3	13	6.8	9.9	1	50.33



- Tighten the union as far as it will go

Geberit metal pipe elbow 90°, lockable, with union connector for Euro cone



Application purposes

- For connecting radiator valves
- Exclusively suitable for heating and cooling
- Application overview: Geberit Mapress Copper → p. 158

Characteristics

- Nickel-plated

Technical data

Material	Brass / copper
----------	----------------

Scope of delivery

- Union connector for Euro cone G 3/4"

Art. no.	DN	d, Ø [mm]	L [cm]	L1 [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
611.603.22.2	12	15	12.5	10	50	10	2	9.30



- Tighten the union as far as it will go

Geberit union connector for Euro cone



Application purposes

- For Geberit Mapress Stainless Steel system pipes 1.4401
- For Geberit Mapress Carbon Steel system pipes
- For copper pipes, rough, nickel-plated or chrome-plated
- For heating and cooling
- Application overview: Geberit Mapress Copper → p. 158

Characteristics

- Clamping ring union
- Seal made of EPDM
- Union nut made of brass, nickel-plated

Art. no.	DN	d, ø [mm]	G ["]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
25072	12	15	3/4	25	5	3.03



- Tighten the union as far as it will go

3.3 Geberit Mapress Copper, Gas

3.3.1 Couplings

Geberit Mapress Copper coupling (gas)



Application purposes

- For natural and liquefied gases
- Application overview: Geberit Mapress Copper → p. 158

Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Technical data

Material		Cu-DHP copper CW024A (EN 1412)						
Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34601	12	15	4.8	0.8	50	5		2.10
34602	15	18	4.8	0.8	50	5		2.63
34603	20	22	5	0.8	100	5		3.18
34604	25	28	5.4	0.8	50	5		6.10
34605	32	35	6.2	1	25	5		7.63
34606	40	42	7.1	1.1	24	4		13.60
34607	50	54	8.3	1.3		5	1	16.92

Geberit Mapress Copper slip coupling (gas)



Application purposes

- For natural and liquefied gases
- Application overview: Geberit Mapress Copper → p. 158

Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Technical data

Material		Cu-DHP copper CW024A (EN 1412)						
Art. no.	DN	d, ø [mm]	E [cm]	L [cm]	Z [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34608	12	15	2.5	8	3	5	1	11.16
34609	15	18	2.5	8	3		1	12.59
34610	20	22	2.5	8.4	3.4	5	1	12.91
34611	25	28	3	9.1	3.1		1	16.13
34612	32	35	3	10.2	4.2		1	20.43
34613	40	42	4	12	4		1	28.25
34614	50	54	4	14	6		1	30.41

3.3.2 Reducers

Geberit Mapress Copper reducer with plain end (gas)



Application purposes

- For natural and liquefied gases
- Application overview: Geberit Mapress Copper → p. 158

Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug


Technical data

Material		Cu-DHP copper CW024A (EN 1412)							
Art. no.	DN	d, ø [mm]	d1, ø [mm]	H [cm]	L [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34615	15 / 12	18	15	3.5	5.5		5	1	2.00
34616	20 / 12	22	15	3.9	5.9	50	5		2.31
34617	20 / 15	22	18	3.7	5.7	25	5		2.31
34618	25 / 12	28	15	4.6	6.6		5	1	6.65
34619	25 / 15	28	18	4.4	6.4		5	1	5.97
34620	25 / 20	28	22	3.9	6	50	5		5.97
34623	32 / 20	35	22	5	7.1		5	1	7.30
34624	32 / 25	35	28	4.5	6.8		5	1	7.29

Art. no.	DN	d, \emptyset [mm]	d1, \emptyset [mm]	H [cm]	L [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34625	40 / 25	42	28	5.6	7.9		5	1	11.94
34626	40 / 32	42	35	5	7.6		5	1	11.94
34627	50 / 25	54	28	7.4	9.7			1	15.59
34628	50 / 32	54	35	7	9.6			1	15.59
34629	50 / 40	54	42	6.1	9.1			1	15.59

3.3.3 Bends

Geberit Mapress Copper bend (gas)



Application purposes

- For natural and liquefied gases
- Application overview: Geberit Mapress Copper → p. 158

Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Technical data

Material	Cu-DHP copper CW024A (EN 1412)
----------	--------------------------------

Art. no.	DN	d, \emptyset [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
----------	----	------------------------	-----------	-----------	--------------	--------------	--------------	---------


arc / angle: 45°

34514	12	15	2.8	0.8	50	5		2.09
34515	15	18	2.9	0.9	25	5		2.83
34516	20	22	3.2	1.1	50	5		3.48
34517	25	28	3.7	1.4	50	5		7.30
34518	32	35	4	1.4		5	1	14.43
34519	40	42	4.7	1.7		5	1	27.22
34520	50	54	5.7	2.2		5	1	37.83

arc / angle: 90°

34500	12	15	3.8	1.8	100	5		2.09
34501	15	18	4.2	2.2	100	5		2.83
34502	20	22	4.7	2.6	100	5		3.48
34503	25	28	5.7	3.4	100	5		7.30
34504	32	35	6.5	3.9	50	5		14.43
34505	40	42	7.6	4.6	24	4		27.22
34506	50	54	9.5	6	24	4		37.83

Geberit Mapress Copper bend with plain end (gas)



Application purposes

- For natural and liquefied gases
- Application overview: Geberit Mapress Copper → p. 158

Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Technical data

Material	Cu-DHP copper CW024A (EN 1412)
----------	--------------------------------

Art. no.	DN	d, \emptyset [mm]	H [cm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
----------	----	------------------------	-----------	-----------	-----------	--------------	--------------	--------------	---------


arc / angle: 45°

34521	12	15	3.7	2.8	0.8	50	5		2.31
34522	15	18	3.9	2.9	0.9	50	5		2.59
34523	20	22	4.4	3.2	1.1	50	5		3.17
34524	25	28	4.5	3.7	1.2	50	5		6.67
34525	32	35	4.9	4	1.4		5	1	13.17
34526	40	42	5.7	4.7	1.7			1	24.86
34527	50	54	6.8	5.7	2.2			1	34.53

arc / angle: 90°

34507	12	15	5.1	3.8	1.8	50	5		2.09
34508	15	18	5.3	4.2	2.2	50	5		2.83
34509	20	22	6	4.7	2.6	100	5		3.48
34510	25	28	6.5	5.7	3.4	50	5		7.30
34511	32	35	7.4	6.5	3.9	5		1	14.43
34512	40	42	8.6	7.6	4.6		5	1	27.22
34513	50	54	10.6	9.5	6		5	1	37.83

Geberit Mapress Copper bend with plain ends (gas)



Application purposes

- For natural and liquefied gases
- Application overview: Geberit Mapress Copper → p. 158


Technical data

Material		Cu-DHP copper CW024A (EN 1412)						
Art. no.	DN	d, Ø [mm]	H [cm]	H1 [cm]	K [cm]	K1 [cm]	SU1 [pc.]	GBP/pc.
arc / angle: 15°								
60905	25	28	4.3	11.9	0	7.6	1	5.79
60906	32	35	4.1	11.8	0	7.7	1	10.85
60907	40	42	4.7	13.7	0	9	1	17.87
60908	50	54	5.5	14.9	0	9.4	1	24.27
arc / angle: 30°								
60935	25	28	4.8	12.4	0	7.6	1	5.79
60936	32	35	4.6	12.3	0	7.7	1	10.85
60937	40	42	5.4	14.4	0	9	1	17.87
60938	50	54	6.3	15.7	0	9.4	1	24.27
arc / angle: 45°								
60875	25	28	4.5	11.8	0	7.3	1	5.79
60876	32	35	4.9	12.6	0	7.7	1	10.85
60877	40	42	5.7	14.7	0	9	1	17.87
60878	50	54	6.8	16.2	0	9.4	1	24.27
arc / angle: 60°								
60955	25	28	6.1	13.7	0	7.6	1	5.79
60956	32	35	5.9	13.6	0	7.7	1	10.85
60957	40	42	6.9	15.9	0	9	1	17.87
60958	50	54	8.3	17.7	0	9.4	1	24.27



- Bend with plain ends 15° / 30° / 45° / 60° / 90° with new masses as of 01.04.2017

Geberit Mapress Copper pipe bridge (gas)

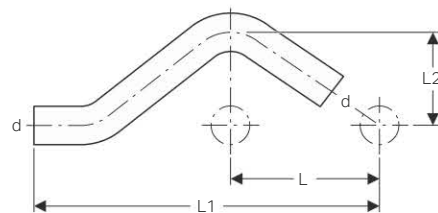

Application purposes


- For crossing parallel pipes with distance L
- For natural and liquefied gases
- Application overview: Geberit Mapress Copper → p. 158

Technical data

Material		Cu-DHP copper CW024A (EN 1412)							
Art. no.	DN	d, Ø [mm]	L [cm]	L1 [cm]	L2 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
60802	12	15	5.6	15.7	3	25	5		6.49
60803	15	18	6	16.6	3.1		5	1	6.31
60804	20	22	6.5	17.9	3.3		5	1	11.40

3.3.4 T-pieces

Geberit Mapress Copper T-piece, equal (gas)



Application purposes

- For natural and liquefied gases
- Application overview: Geberit Mapress Copper → p. 158

Characteristics


- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Technical data

Material	Cu-DHP copper CW024A (EN 1412)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	L [cm]	L1 [cm]	l [cm]	Z [cm]	Z1 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34528	12	15	6.4	3.1	3.2	1.2	1.2	50	5		3.53
34529	15	18	6.8	3.4	3.4	1.4	1.4		5	1	4.64
34530	20	22	7.4	3.7	3.7	1.6	1.6	50	5		5.72
34531	25	28	8.4	4.2	4.2	1.9	1.9	25	5		10.63
34532	32	35	10	5.9	5	2.4	3.3		5	1	17.35
34533	40	42	11.4	6.6	5.7	2.7	3.6			1	34.29
34534	50	54	13.8	7.8	6.9	3.4	4.3			1	43.97

Geberit Mapress Copper T-piece, reduced (gas)



Application purposes

- For natural and liquefied gases
- Application overview: Geberit Mapress Copper → p. 158

- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Characteristics


- Pressing indicator
- Leaky if unpressed

Technical data

Material	Cu-DHP copper CW024A (EN 1412)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	L [cm]	L1 [cm]	l [cm]	l2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34535	15 / 12 / 15	18	15	18	6.8	3.5	3.4	3.4	1.4	1.5	1.4			1	4.64
34553	20 / 12 / 12	22	15	15	8	3.8	3.7	4.3	1.6	1.8	2.3		5	1	4.70
34536	20 / 12 / 20	22	15	22	7.4	3.8	3.7	3.7	1.6	1.8	1.6	25	5		5.14
34537	20 / 15 / 20	22	18	22	7.4	3.8	3.7	3.7	1.6	1.8	1.6		5	1	5.14
34554	20 / 20 / 12	22	22	15	7.4	3.7	3.7	4.5	1.6	1.6	2.5		5	1	4.70
34588	25 / 12 / 25	28	15	28	8.4	4.1	4.2	4.2	1.9	2.1	1.9		5	1	10.15
34589	25 / 15 / 25	28	18	28	8.4	4.1	4.2	4.2	1.9	2.1	1.9			1	10.15
34590	25 / 20 / 25	28	22	28	8.4	4.1	4.2	4.2	1.9	2	1.9		5	1	10.15
34543	32 / 20 / 32	35	22	35	10	5.2	5	5	2.4	3.1	2.4		5	1	17.24
34544	32 / 25 / 32	35	28	35	10	5.5	5	5	2.4	3.2	2.4			1	17.24
34545	40 / 20 / 40	42	22	42	11.4	5.5	5.7	5.7	2.7	3.4	2.7			1	32.16
34546	40 / 25 / 40	42	28	42	11.4	5.8	5.7	5.7	2.7	3.5	2.7			1	32.16
34547	40 / 32 / 40	42	35	42	11.4	6.2	5.7	5.7	2.7	3.6	2.7			1	32.16
34548	50 / 20 / 50	54	22	54	13.8	6.1	6.9	6.9	3.4	4	3.4			1	52.59
34549	50 / 25 / 50	54	28	54	13.8	6.4	6.9	6.9	3.4	4.1	3.4			1	52.59
34550	50 / 32 / 50	54	35	54	13.8	6.8	6.9	6.9	3.4	4.2	3.4			1	52.59
34551	50 / 40 / 50	54	42	54	13.8	7.2	6.9	6.9	3.4	4.2	3.4			1	52.59

Geberit Mapress Copper T-piece with female thread (gas)



Application purposes

- For natural and liquefied gases
- Application overview: Geberit Mapress Copper → p. 158

Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug


Technical data

Material	DR brass CW602N
----------	-----------------

Art. no.	DN	d, ø [mm]	Rp ["]	d1, ø [mm]	L [cm]	L1 [cm]	l [cm]	l2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34735	12 / 15 / 12	15	1/2	15	6.4	2.6	3.2	3.2	1.2	1.3	1.2	5	1	10.41
34736	15	18	1/2	18	6.8	2.4	3.4	3.4	1.4	1.1	1.4		1	10.41
34740	20 / 15 / 20	22	1/2	22	7.4	4.3	3.7	3.7	1.6	3	1.6	5	1	13.58
34737	20	22	3/4	22	7.4	2.7	3.7	3.7	1.6	1.4	1.6	5	1	14.26
34738	25 / 15 / 25	28	1/2	28	8.4	2.9	4.2	4.2	1.9	1.6	1.9	5	1	21.92
34739	25 / 20 / 25	28	3/4	28	8.4	3.5	4.2	4.2	1.9	2	1.9		1	21.91

3.3.5 Adaptors, permanent

Geberit Mapress Copper adaptor with male thread (gas)



Application purposes

- For natural and liquefied gases
- Application overview: Geberit Mapress Copper → p. 158

Characteristics


- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Technical data

Material	Gunmetal (CuSn5Zn5Pb2-C)
----------	--------------------------

Art. no.	DN	d, ø [mm]	R ["]	H [cm]	L [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34666	12 / 15	15	1/2	1.6	3.6	50	5		3.00
34675	12 / 20	15	3/4	1.8	3.8			1	2.93
34667	15	18	1/2	1.7	3.7	50	5		2.99
34676	15 / 20	18	3/4	1.8	3.8	25	5		2.99
34669	20 / 15	22	1/2	1.7	3.8	50	5		5.02
34670	20	22	3/4	1.8	3.9	100	5		5.02
34677	20 / 25	22	1	2	4.1	50	5		5.02
34678	25 / 20	28	3/4	1.9	4.2		5	1	11.48
34671	25	28	1	2	4.3	50	5		11.48
34679	32 / 25	35	1	2.2	4.8		5	1	22.08
34672	32	35	1 1/4	2.3	4.9	25	5		22.08
34673	40	42	1 1/2	2.8	5.8	24	4		29.44
34674	50	54	2	2.8	6.3		5	1	60.25

Geberit Mapress Copper adaptor with male thread and plain end (gas)



Application purposes


- For natural and liquefied gases
- Application overview: Geberit Mapress Copper → p. 158

Technical data

Material	Gunmetal (CuSn5Zn5Pb2-C)
----------	--------------------------

Art. no.	DN	d, ø [mm]	R ["]	H [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
61932	12 / 15	15	1/2	5.7	5	1	2.01
61933	15	18	1/2	5.7		1	2.44
61935	20 / 15	22	1/2	5.7		1	3.75
61936	20	22	3/4	5.9	5	1	3.75

Geberit Mapress Copper adaptor with female thread (gas)



Application purposes

- For natural and liquefied gases
- Application overview: Geberit Mapress Copper → p. 158

Characteristics


- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Technical data

Material	Gunmetal (CuSn5Zn5Pb2-C)
----------	--------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34683	12 / 15	15	1/2	3.8	0.5	50	5		2.93
34693	12 / 20	15	3/4	3.9	0.4			1	2.93
34684	15	18	1/2	3.7	0.4	25	5		2.99
34685	15 / 20	18	3/4	3.9	0.4		5	1	2.99
34686	20 / 15	22	1/2	3.6	0.2	25	5		5.02
34687	20	22	3/4	3.9	0.3	50	5		5.02
34688	20 / 25	22	1	4.3	0.5	25	5		5.02
34689	25	28	1	4.5	0.5	50	5		11.48
34690	32	35	1 1/4	5	0.5		5	1	22.08
34691	40	42	1 1/2	5.4	0.5			1	29.44
34692	50	54	2	6.3	0.5			1	60.25

Geberit Mapress Copper adaptor with female thread and plain end (gas)



Application purposes


- For natural and liquefied gases
- Application overview: Geberit Mapress Copper → p. 158

Technical data

Material	Gunmetal (CuSn5Zn5Pb2-C)
----------	--------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	H [cm]	L [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
63558	12 / 15	15	1/2	3.3	4.6	5	1	3.00
63559	15	18	1/2	3.3	4.6		1	3.66
63560	15 / 20	18	3/4	3.3	4.8		1	3.66
63561	20 / 15	22	1/2	3.3	4.6	5	1	5.88
63562	20	22	3/4	3.4	4.9	5	1	5.88
63564	32 / 25	35	1	4.6	6.3		1	20.75
63565	50	54	2	6.2	8.5		1	29.03

Geberit Mapress Copper elbow adaptor 90° with male thread (gas)



Application purposes

- For natural and liquefied gases
- Application overview: Geberit Mapress Copper → p. 158

Characteristics


- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Technical data

Material	DR brass CW602N
----------	-----------------

Art. no.	DN	d, ø [mm]	R ["]	H [cm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34728	12 / 15	15	1/2	3.1	3.5	1.5	25	5		10.98
34729	15	18	1/2	3.4	3.5	1.5			1	13.74
34730	20	22	3/4	3.7	3.8	1.8		5	1	17.71

Geberit Mapress Copper elbow adaptor 90° with female thread (gas)



Application purposes

- For natural and liquefied gases
- Application overview: Geberit Mapress Copper → p. 158

Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug


Technical data

Material	DR brass CW602N
----------	-----------------

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	L1 [cm]	Z [cm]	Z1 [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34725	12 / 15	15	1/2	3.6	2.7	1.3	1.4	5	1	10.98
34726	15	18	1/2	3.6	3	1.6	1.5		1	13.74
34727	20	22	3/4	4.5	3.3	2.4	1.8	5	1	17.71

3.3.6 Adaptors and connections, detachable

Geberit Mapress Copper adaptor with union nut (gas)



Application purposes

- For natural and liquefied gases
- Application overview: Geberit Mapress Copper → p. 158

Characteristics

- Pressing indicator
- Leaky if unpressed
- Conical sealing

- Marked in yellow
- Union nut made of brass
- Seal ring made of HNBR, yellow
- O-ring made of HNBR, yellow
- Pressing socket with yellow protection plug


Technical data

Material	DR brass CW602N
----------	-----------------

Art. no.	DN	d, \varnothing [mm]	G ["]	L [cm]	Z [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34555	PO	12	15	7/8	3.3	0.9	1	5.61
34556		20	22	1 1/8	4.2	1.6	5	9.04
34552		20	22	1 3/8	4	1.9	1	8.62
34557		25	28	1 3/8	4.5	1.7	5	9.49

PO: Phase out as of April 2017

Geberit Mapress Copper flange PN 10/16, with pressing socket (gas)



Application purposes

- For natural and liquefied gases
- Application overview: Geberit Mapress Copper → p. 158

Characteristics

- Pressing indicator
- Leaky if unpressed

- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug
- Type A (smooth sealing surface), EN 1092-1

Technical data

Material	Gunmetal (CuSn5Zn5Pb2-C)
----------	--------------------------

Art. no.	DN	d, \varnothing [mm]	di, \varnothing [mm]	D [cm]	k [mm]	m [mm]	H [cm]	L [cm]	Z [cm]	n [pc.]	PN [bar]	SU1 [pc.]	GBP/pc.
34715	25	28	26	11.5	85	14	1.4	5.7	3.4	4	10 / 16	1	360.58

Accessories

- Geberit flange gasket PN 10/16 → p. 95
- Geberit bolt set for flange connection, made of CrNi steel → p. 96

3.3.7 Sealings

Geberit Mapress Copper cap (gas)



Application purposes

- For natural and liquefied gases
- For permanent termination of pipe ends
- Application overview: Geberit Mapress Copper → p. 158

Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug


Technical data

Material	Cu-DHP copper CW024A (EN 1412)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34752	12	15	2.3	0.3	5		1	3.68
34753	15	18	2.3	0.3			1	4.63
34754	20	22	2.5	0.4		5	1	6.18
34755	25	28	2.7	0.4			1	9.53
34756	32	35	3	0.4			1	10.63
34757	40	42	3.4	0.4			1	16.50
34758	50	54	3.9	0.4			1	21.50

3.3.8 Connections

Geberit Mapress Copper elbow tap connector 90° (gas)

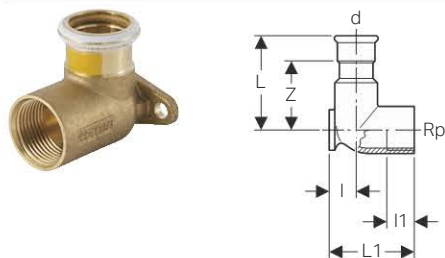

Application purposes

- For natural and liquefied gases
- Application overview: Geberit Mapress Copper → p. 158

Characteristics


- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Two fastening points
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Technical data

Material	DR brass CW602N
----------	-----------------

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	l [cm]	l1 [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
L1 / length: 4.3 cm											
34731	12	15	1/2	3.2	1.3	1.5	1.2	25	5		12.09
34732	15	18	1/2	3.2	1.3	1.5	1.2		5	1	18.41
L1 / length: 5.1 cm											
34733	20	22	3/4	3.5	1.7	1.6	1.4		5	1	20.24

Geberit Mapress Copper elbow tap connector 90°, offset, circular hole 50 mm (gas)



Application purposes

- For connecting one- and two-pipe gas metres
- For natural and liquefied gases
- Application overview: Geberit Mapress Copper → p. 158

Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Two fastening points for circular hole \varnothing 50 mm
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Technical data


Material	DR brass CW602N
----------	-----------------

Art. no.	DN	d, \varnothing [mm]	Rp ["]	L [cm]	l [cm]	l1 [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
L1 / length: 5.1 cm									
91103	20	22	3/4	3.5	1.7	1.6	1.4	1	21.70
L1 / length: 6.5 cm									
91105	20 / 25	22	1	4.2	3	2.2	2.1	1	17.55
91104	25 / 20	28	3/4	4.4	3	1.6	2.1	1	24.22
91106	25	28	1	4.4	3	2.2	2.1	1	19.59

Accessories

- Geberit Mapress mounting bracket for gas metre → p. 51

Geberit Mapress mounting bracket for gas metre



Application purposes

- For one- and two-pipe gas metres

Characteristics

- Connecting distance adjustable by ± 3 mm at the gas metre
- Zinc-plated
- Circular hole, \varnothing 50 mm

Technical data

Material	Steel
----------	-------

Scope of delivery

- Fastening material

Art. no.	AD [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
91096	25	10	1	16.78

3.4 Geberit Mapress Copper, FKM, blue

3.4.1 Couplings

Geberit Mapress Copper coupling (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Copper → p. 158

Characteristics

- Pressing indicator
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Material		Cu-DHP copper CW024A (EN 1412)					
Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
52062	12	15	4.8	0.8		1	2.86
52063	15	18	4.8	0.8		1	3.71
52064	20	22	5	0.8	5	1	4.75
52065	25	28	5.4	0.8		1	7.95
52066	32	35	6.2	1		1	10.48
52067	40	42	7.1	1.1		1	17.50
52068	50	54	8.3	1.3		1	23.81

Geberit Mapress Copper slip coupling (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Copper → p. 158

Characteristics

- Pressing indicator
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Material		Cu-DHP copper CW024A (EN 1412)					
Art. no.	DN	d, ø [mm]	E [cm]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
52082	12	15	2.5	8	3	1	11.09
52083	15	18	2.5	8	3	1	12.65
52084	20	22	2.5	8.4	3.4	1	13.46
52085	25	28	3	9.1	3.1	1	16.61
52086	32	35	3	10.2	4.2	1	22.07
52087	40	42	4	12	4	1	30.74
52088	50	54	4	14	6	1	36.02

3.4.2 Reducers

Geberit Mapress Copper reducer with plain end (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Copper → p. 158

Characteristics


- Pressing indicator
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Material		Cu-DHP copper CW024A (EN 1412)					
Art. no.	DN	d, ø [mm]	d1, ø [mm]	H [cm]	L [cm]	SU1 [pc.]	GBP/pc.
52133	15 / 12	18	15	3.5	5.5	1	2.41
52134	20 / 12	22	15	3.9	5.9	1	2.89
52135	20 / 15	22	18	3.7	5.7	1	2.89
52136	25 / 12	28	15	4.6	6.6	1	6.32
52137	25 / 15	28	18	4.4	6.4	1	6.32
52138	25 / 20	28	22	3.9	6	1	6.32
52141	32 / 20	35	22	5	7.1	1	8.01
52142	32 / 25	35	28	4.5	6.8	1	8.01
52145	40 / 20	42	22	6	8.1	1	12.64
52146	40 / 25	42	28	5.6	7.9	1	12.64
52147	40 / 32	42	35	5	7.6	1	12.64
52152	50 / 32	54	35	7	9.6	1	16.68
52153	50 / 40	54	42	6.1	9.1	1	16.68

3.4.3 Bends

Geberit Mapress Copper bend (FKM, blue)

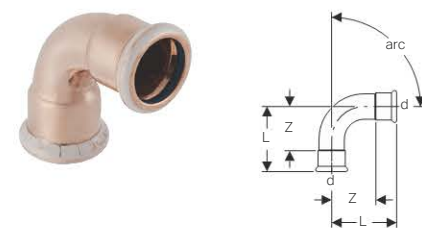

Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Copper → p. 158


Characteristics

- Pressing indicator
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Material		Cu-DHP copper CW024A (EN 1412)						
Art. no.	DN	d, \varnothing [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
arc / angle: 45°								
52222	12	15	2.8	0.8			1	2.86
52223	15	18	2.9	0.9			1	4.07
52224	20	22	3.2	1.1		5	1	5.09
52225	25	28	3.7	1.4			1	9.01
52226	32	35	4	1.4			1	16.63
52227	40	42	4.7	1.7			1	29.81
52228	50	54	5.7	2.2			1	40.69
arc / angle: 90°								
52282	12	15	3.8	1.8		5	1	2.86
52283	15	18	4.2	2.2		5	1	4.07
52284	20	22	4.7	2.6	50	5		5.09
52285	25	28	5.7	3.4		5	1	9.01
52286	32	35	6.5	3.9			1	16.63
52287	40	42	7.6	4.6			1	28.39
52288	50	54	9.5	6			1	40.69

Geberit Mapress Copper bend with plain end (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Copper → p. 158


Characteristics

- Pressing indicator
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Material		Cu-DHP copper CW024A (EN 1412)						
Art. no.	DN	d, \varnothing [mm]	H [cm]	L [cm]	Z [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
arc / angle: 45°								
52242	12	15	3.7	2.8	0.8		1	2.86
52243	15	18	3.9	2.9	0.9		1	4.07
52244	20	22	4.4	3.2	1.1	5	1	5.09
52245	25	28	4.5	3.7	1.2		1	9.01
52246	32	35	4.9	4	1.4		1	16.63
52247	40	42	5.7	4.7	1.7		1	29.81
52248	50	54	6.8	5.7	2.2		1	40.69
arc / angle: 90°								
52312	12	15	5.1	3.8	1.8		1	2.86
52313	15	18	5.3	4.2	2.2	5	1	4.07
52314	20	22	6	4.7	2.6	5	1	5.09
52315	25	28	6.5	5.7	3.4		1	9.01
52316	32	35	7.4	6.5	3.9		1	16.63
52317	40	42	8.6	7.6	4.6		1	28.39
52318	50	54	10.6	9.5	6		1	40.69

Geberit Mapress Copper bend with plain ends



Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Copper → p. 158


Technical data

Material		Cu-DHP copper CW024A (EN 1412)						
Art. no.	DN	d, \varnothing [mm]	H [cm]	H1 [cm]	K [cm]	K1 [cm]	SU1 [pc.]	GBP/pc.
arc / angle: 15°								
60905	25	28	4.3	11.9	0	7.6	1	5.79
60906	32	35	4.1	11.8	0	7.7	1	10.85
60907	40	42	4.7	13.7	0	9	1	17.87
60908	50	54	5.5	14.9	0	9.4	1	24.27
arc / angle: 30°								
60935	25	28	4.8	12.4	0	7.6	1	5.79
60936	32	35	4.6	12.3	0	7.7	1	10.85
60937	40	42	5.4	14.4	0	9	1	17.87
60938	50	54	6.3	15.7	0	9.4	1	24.27
arc / angle: 45°								
60875	25	28	4.5	11.8	0	7.3	1	5.79
60876	32	35	4.9	12.6	0	7.7	1	10.85
60877	40	42	5.7	14.7	0	9	1	17.87
60878	50	54	6.8	16.2	0	9.4	1	24.27
arc / angle: 60°								
60955	25	28	6.1	13.7	0	7.6	1	5.79
60956	32	35	5.9	13.6	0	7.7	1	10.85
60957	40	42	6.9	15.9	0	9	1	17.87
60958	50	54	8.3	17.7	0	9.4	1	24.27



- Bend with plain ends 15° / 30° / 45° / 60° / 90° with new masses as of 01.04.2017

Geberit Mapress Copper pipe bridge

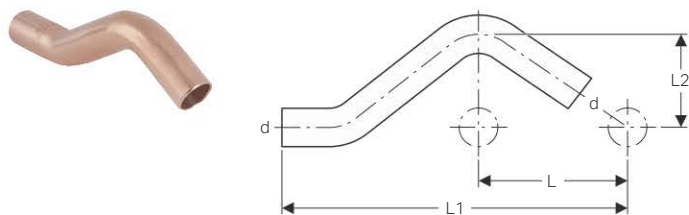

Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Copper → p. 158


Technical data

Material	Cu-DHP copper CW024A (EN 1412)
----------	--------------------------------

Art. no.	DN	d, \emptyset [mm]	L [cm]	L1 [cm]	L2 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
60802	12	15	5.6	15.7	3	25	5		6.49
60803	15	18	6	16.6	3.1		5	1	6.31
60804	20	22	6.5	17.9	3.3		5	1	11.40

3.4.4 T-pieces

Geberit Mapress Copper T-piece, equal (FKM, blue)

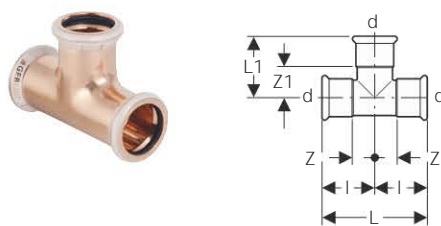

Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Copper → p. 158

Characteristics


- Pressing indicator
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Material	Cu-DHP copper CW024A (EN 1412)
----------	--------------------------------

Art. no.	DN	d, \emptyset [mm]	L [cm]	L1 [cm]	l [cm]	Z [cm]	Z1 [cm]	SU1 [pc.]	GBP/pc.
52332	12	15	6.4	3.1	3.2	1.2	1.2	1	4.78
52333	15	18	6.8	3.4	3.4	1.4	1.4	1	6.65
52334	20	22	7.4	3.7	3.7	1.6	1.6	1	8.40
52335	25	28	8.4	4.2	4.2	1.9	1.9	1	13.23
52336	32	35	10	5.9	5	2.4	3.3	1	21.15
52337	40	42	11.4	6.6	5.7	2.7	3.6	1	39.30
52338	50	54	13.8	7.8	6.9	3.4	4.3	1	52.55

Geberit Mapress Copper T-piece, reduced (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Copper → p. 158

Characteristics


- Pressing indicator
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Material	Cu-DHP copper CW024A (EN 1412)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	L [cm]	L1 [cm]	I [cm]	I2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU1 [pc.]	GBP/pc.
52356	15 / 12 / 15	18	15	18	6.8	3.5	3.4	3.4	1.4	1.5	1.4	1	6.65
52359	20 / 15 / 20	22	18	22	7.4	3.8	3.7	3.7	1.6	1.8	1.6	1	7.55
52366	25 / 20 / 25	28	22	28	8.4	4.1	4.2	4.2	1.9	2	1.9	1	13.23
52369	32 / 20 / 32	35	22	35	10	5.2	5	5	2.4	3.1	2.4	1	20.97
52370	32 / 25 / 32	35	28	35	10	5.5	5	5	2.4	3.2	2.4	1	20.97
52373	40 / 20 / 40	42	22	42	11.4	5.5	5.7	5.7	2.7	3.4	2.7	1	36.89
52374	40 / 25 / 40	42	28	42	11.4	5.8	5.7	5.7	2.7	3.5	2.7	1	36.89
52375	40 / 32 / 40	42	35	42	11.4	6.2	5.7	5.7	2.7	3.6	2.7	1	36.89
52378	50 / 20 / 50	54	22	54	13.8	6.1	6.9	6.9	3.4	4	3.4	1	62.81
52379	50 / 25 / 50	54	28	54	13.8	6.4	6.9	6.9	3.4	4.1	3.4	1	62.81
52380	50 / 32 / 50	54	35	54	13.8	6.8	6.9	6.9	3.4	4.2	3.4	1	62.81

Geberit Mapress Copper T-piece with female thread (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Copper → p. 158

Characteristics

- Pressing indicator
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Material	Gunmetal (CuSn5Zn5Pb2-C)
----------	--------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	d1, ø [mm]	L [cm]	L1 [cm]	I [cm]	I2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU1 [pc.]	GBP/pc.
52413	12 / 15 / 12	15	1/2	15	6.8	2.6	3.4	3.4	1.4	1.3	1.4	1	9.97
52414	15	18	1/2	18	8.2	2.4	4.1	4.1	2.1	1.1	2.1	1	10.18
52416	20 / 15 / 20	22	1/2	22	8.4	2.6	4.2	4.2	2.1	1.3	2.1	1	14.36
52418	25 / 15 / 25	28	1/2	28	8.8	2.9	4.4	4.4	2.1	1.6	2.1	1	22.24
52421	32 / 15 / 32	35	1/2	35	10	3.5	5	5	2.4	2.2	2.4	1	26.54
52424	40 / 15 / 40	42	1/2	42	11.4	3.8	5.7	5.7	2.7	2.5	2.7	1	33.36
52427	50 / 15 / 50	54	1/2	54	13.8	4.4	6.9	6.9	3.4	3.1	3.4	1	40.69

3.4.5 Adaptors, permanent

Geberit Mapress Copper adaptor with male thread (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Copper → p. 158

Characteristics

- Pressing indicator
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Material		Gunmetal (CuSn5Zn5Pb2-C)						
Art. no.	DN	d, ø [mm]	R ["]	H [cm]	L [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
52453	12 / 15	15	1/2	1.6	3.6		1	3.08
52454	12 / 20	15	3/4	1.8	3.8		1	3.08
52455	15	18	1/2	1.7	3.7		1	2.96
52456	15 / 20	18	3/4	1.8	3.8		1	2.96
52457	20 / 15	22	1/2	1.7	3.8		1	5.12
52458	20	22	3/4	1.8	3.9	5	1	5.12
52460	25 / 20	28	3/4	1.9	4.2		1	11.34
52461	25	28	1	2	4.3		1	11.34
52462	PO 25 / 32	28	1 1/4	2.1	4.4		1	11.34
52464	32	35	1 1/4	2.3	4.9		1	21.37
52465	40 / 32	42	1 1/4	2.8	5.8		1	28.41
52466	40	42	1 1/2	2.8	5.8		1	28.41
52468	50	54	2	2.8	6.3		1	58.84

PO: Phase out as of April 2017

Geberit Mapress Copper adaptor with male thread and plain end



Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Copper → p. 158

Technical data

Material		Gunmetal (CuSn5Zn5Pb2-C)						
Art. no.	DN	d, ø [mm]	R ["]	H [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.	
61932	12 / 15	15	1/2	5.7	5	1	2.01	
61933	15	18	1/2	5.7		1	2.44	
61935	20 / 15	22	1/2	5.7		1	3.75	
61936	20	22	3/4	5.9	5	1	3.75	

Geberit Mapress Copper adaptor with female thread (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Copper → p. 158

Characteristics

- Pressing indicator
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Material		Gunmetal (CuSn5Zn5Pb2-C)						
Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.	
52484	12 / 15	15	1/2	3.8	0.5	1	3.08	
52486	15	18	1/2	3.7	0.4	1	3.11	
52488	20 / 15	22	1/2	3.6	0.2	1	5.36	
52489	20	22	3/4	3.9	0.3	1	5.36	
52493	25	28	1	4.5	0.5	1	11.91	
52495	32	35	1 1/4	5	0.5	1	22.45	
52498	40	42	1 1/2	5.4	0.5	1	29.84	
52500	50	54	2	6.3	0.5	1	61.80	

Geberit Mapress Copper adaptor with female thread and plain end




Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Copper → p. 158

Technical data

Material		Gunmetal (CuSn5Zn5Pb2-C)						
Art. no.	DN	d, ø [mm]	Rp ["]	H [cm]	L [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
63558	12 / 15	15	1/2	3.3	4.6	5	1	3.00
63559	15	18	1/2	3.3	4.6		1	3.66
63560	15 / 20	18	3/4	3.3	4.8		1	3.66
63561	20 / 15	22	1/2	3.3	4.6	5	1	5.88
63562	20	22	3/4	3.4	4.9	5	1	5.88
63564	32 / 25	35	1	4.6	6.3		1	20.75
63565	50	54	2	6.2	8.5		1	29.03

Geberit Mapress Copper elbow adaptor 90° with male thread (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Copper → p. 158


Characteristics

- Pressing indicator
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Material		Gunmetal (CuSn5Zn5Pb2-C)						
Art. no.	DN	d, ø [mm]	R ["]	H [cm]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
52524	12 / 15	15	1/2	3.1	3.5	1.5	1	10.19
52526	15	18	1/2	3.4	3.5	1.5	1	12.74
52529	20	22	3/4	4.4	4.8	2.7	1	16.46
52532	25	28	1	5.3	5.8	3.5	1	23.14

Geberit Mapress Copper elbow adaptor 90° with female thread (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Copper → p. 158

Characteristics


- Pressing indicator
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Material		Gunmetal (CuSn5Zn5Pb2-C)								
Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	L1 [cm]	Z [cm]	Z1 [cm]	SU1 [pc.]	GBP/pc.	
52544	12 / 15	15	1/2	3.6	2.7	1.6	1.4	1	10.19	
52546	15	18	1/2	3.6	3	1.6	1.7	1	12.74	
52549	20	22	3/4	4.5	2.7	2.4	1.2	1	16.46	
52552	25	28	1	5.1	3.3	2.8	1.6	1	22.18	

3.4.6 Adaptors and connections, detachable

Geberit Mapress Copper adaptor union with male thread (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Copper → p. 158

Characteristics


- Pressing indicator
- Union nut made of brass
- Seal ring made of FKM, blue
- Pressing socket with black protection plug
- Flat gasket made of FPM, green

Technical data

Material		Gunmetal (CuSn5Zn5Pb2-C)							
Art. no.	DN	d, ø [mm]	R ["]	G ["]	H [cm]	L [cm]	SU1 [pc.]	GBP/pc.	
52562	12 / 15	15	1/2	3/4	4.1	6.1	1	18.19	
52564	15	18	1/2	3/4	4.1	6.1	1	16.27	
52565	PO	15 / 20	18	3/4	3/4	4.3	6.3	1	16.27
52566	20 / 15	22	1/2	1	4.6	6.7	1	17.20	
52567	20	22	3/4	1	4.7	6.8	1	26.07	
52568	20 / 25	22	1	1	4.8	6.9	1	17.20	
52570	25	28	1	1 1/4	5.2	7.5	1	28.55	
52571	32	35	1 1/4	1 1/2	5.4	8	1	34.61	
52572	40	42	1 1/2	1 3/4	5.5	8.5	1	46.51	
52573	50	54	2	2 3/8	6.2	9.7	1	76.67	

PO: Phase out as of April 2017

Geberit Mapress Copper adaptor union with female thread (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Copper → p. 158

Characteristics

- Pressing indicator
- Union nut made of brass
- Seal ring made of FKM, blue
- Pressing socket with black protection plug
- Flat gasket made of FPM, green


Technical data

Material	Gunmetal (CuSn5Zn5Pb2-C)
----------	--------------------------

Art. no.	DN	d, \varnothing [mm]	Rp ["]	G ["]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
52611	12 / 15	15	1/2	3/4	5	1.7	1	18.19
52612	12 / 20	15	3/4	3/4	5.9	2.4	1	14.18
52613	15	18	1/2	3/4	5	1.7	1	16.27
52614	PO 15 / 20	18	3/4	3/4	5.9	2.4	1	16.27
52615	20	22	3/4	1	6.2	2.6	1	26.07
52616	20 / 25	22	1	1	6.6	2.8	1	16.39
52617	25	28	1	1 1/4	6.3	2.3	1	28.55
52618	32	35	1 1/4	1 1/2	7.5	3	1	34.61
52619	40	42	1 1/2	1 3/4	7.9	3	1	46.51
52620	50	54	2	2 3/8	8.5	2.7	1	76.67

PO: Phase out as of April 2017

Geberit Mapress Copper adaptor with union nut (FKM, blue)



Application purposes

- Suitable exclusively for threads with an inner diameter of $\leq di$
- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Copper → p. 158

Characteristics

- Pressing indicator
- Union nut made of brass
- Seal ring made of FKM, blue
- Pressing socket with black protection plug
- Flat gasket made of FPM, green

Technical data

Material	Gunmetal (CuSn5Zn5Pb2-C)
----------	--------------------------


Art. no.	DN	d, \varnothing [mm]	G ["]	di, \varnothing [mm]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
52653	12	15	3/4	13	3.7	1.1	1	5.72
52656	15	18	3/4	13	3.7	1.1	1	6.20
52657	PO 15	18	1	20	3.9	1.3	1	5.94
52661	20	22	1	20	4	1.1	1	9.26
52662	PO 20	22	1 1/4	26	4.3	1.3	1	9.26

PO: Phase out as of April 2017

Art. no.	DN	d, \varnothing [mm]	G ["]	di, \varnothing [mm]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
52663	PO 20	22	1 1/2	32	4.4	1.3	1	9.26
52664	25	28	1	20	4	1.3	1	9.74
52665	25	28	1 1/4	26	4.4	1.3	1	9.74
52666	PO 25	28	1 1/2	32	4.6	1.3	1	9.74
52667	32	35	1 1/2	32	4.8	1.3	1	11.83
52668	PO 40	42	1 3/4	39	5.2	1.3	1	21.66
52670	PO 50	54	2 3/8	51	5.8	1.5	1	31.41

PO: Phase out as of April 2017

Geberit Mapress adaptor union with clamping ring for corrugated pipes, NPW, plain end



Application purposes

- For thermal media (solar)
- For mineral oils
- For fuels
- Only suitable for liquid media


Technical data

Material	DR brass CW602N
----------	-----------------

Art. no.	DN	DN	d, \varnothing [mm]	L [cm]	PN [bar]	SU2 [pc.]	GBP/pc.
22421	12	16	15	6.4	10	2	12.91
22431	12	20	15	6.7	10	2	15.06
22422	15	16	18	6.4	10	2	13.99
22432	15	20	18	6.7	10	2	16.14
22423	20	16	22	6.8	10	2	15.06
22433	20	20	22	6.8	10	2	17.20
22444	25	25	28	6.8	10	2	23.66

3.4.7 Sealings

Geberit Mapress Copper cap (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- For permanent termination of pipe ends
- Application overview: Geberit Mapress Copper → p. 158

Characteristics

- Pressing indicator
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data


Material	Cu-DHP copper CW024A (EN 1412)
----------	--------------------------------

Art. no.	DN	d, \emptyset [mm]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
52752	12	15	2.3	0.3	1	4.25
52753	15	18	2.3	0.3	1	5.31
52754	20	22	2.5	0.4	1	7.04
52755	25	28	2.7	0.4	1	10.40
52756	32	35	3	0.4	1	12.42
52757	40	42	3.4	0.4	1	19.01
52758	50	54	3.9	0.4	1	25.64

3.5 Accessories for Geberit Mapress Copper

3.5.1 Insulations for connectors

Sound insulation set for Geberit single elbow tap connector 90°

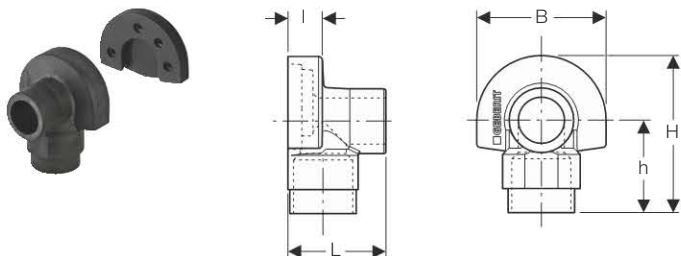

Application purposes

- For Geberit elbow tap connector with female thread Rp 1/2"

Characteristics

- Black

Technical data

Noise reduction at 3 bar flow pressure	12 dB(A)
Material	EPDM

Scope of delivery

- Sound insulation cap
- Sound insulation base

Art. no.	B [cm]	H [cm]	h [cm]	L [cm]	I [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
601.801.00.1	7	8.5	5	5.3	1.9	50	10	1	2.82

Sound insulation base for Geberit tap connector, straight



Application purposes

- For Geberit tap connector, straight, with female thread Rp 1/2"

Characteristics


- Black

Technical data

Material	EPDM
----------	------

Art. no.	SU3 [pc.]	SU2 [pc.]	GBP/pc.
601.802.00.1	100	10	0.75

Sound insulation set for Geberit double elbow tap connector 90°

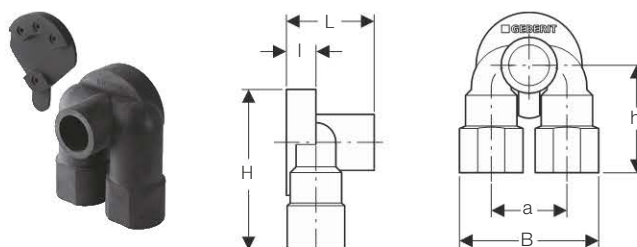

Application purposes

- For Geberit double elbow tap connector with female thread Rp 1/2"

Characteristics

- Black

Technical data


Noise reduction at 3 bar flow pressure	12 dB(A)
Material	EPDM

Scope of delivery

- Sound insulation cap
- Sound insulation base

Art. no.	a [cm]	B [cm]	H [cm]	h [cm]	L [cm]	I [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
601.805.00.1	5	9.2	10.6	7.1	5.3	2	50	10	1	10.14

Insulation box for Geberit metal pipe connector bend and connector T-pieces

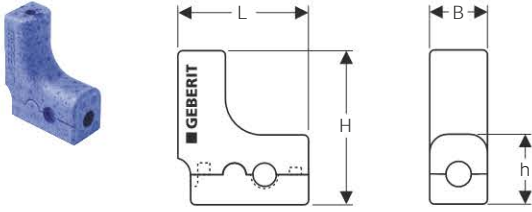

- Characteristics**
- Blue
 - Two-piece


Technical data

Material, insulation	EPP
Insulation thickness	7.5 mm
Thermal conductivity, insulation	0.04 W/(m · K)

Art. no.	B [cm]	H [cm]	h [cm]	L [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
601.720.00.1	5	13	6	11	480	20	2	2.58

3.5.2 Caulks for pipes and fittings

Geberit sealing tape

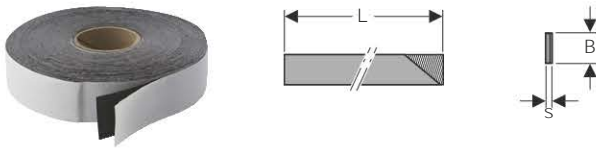

Application purposes

- For protecting Geberit Mapress system pipes and fittings against external corrosion factors
- For protecting the pipe cross-sections of Geberit Mepla against external corrosion factors
- For protecting Geberit Volex system pipes and fittings against external corrosion factors

Characteristics

- UV-resistant
- Black

Technical data

Installation temperature	-10 - +50 °C
Temperature resistance	-60 - +100 °C
Material	IIR

Art. no.	s [mm]	B [cm]	L [m]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
601.813.00.1	1	3	12.5	6	1	29.68
601.815.00.1	1	5	12.5	5	1	49.42



- Attach after pressure test

3.5.3 Pipe covers

Geberit pipe sleeve, slit



Application purposes

- For cladding visible pipes

Characteristics


- Pure white RAL 9010

Technical data

Material	PP
----------	----

Art. no.	di, ø [mm]	L [m]	SU2 [m]	GBP/m
611.605.BM.1	15-20	1	5	2.14

Geberit double collar

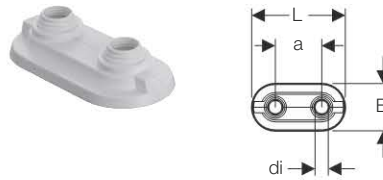

Application purposes

- For covering pipe feed-throughs

Characteristics

- Two-piece
- Pure white RAL 9010


Technical data

Material	PS
----------	----

Art. no.	a [cm]	di, ø [mm]	B [cm]	L [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
611.610.BM.1	5	14 / 15 / 16 / 18 / 20	5	10	100	10	1.07

3.5.4 Pipe fastenings

Geberit pipe bracket, insulated, with threaded socket M8 / M10

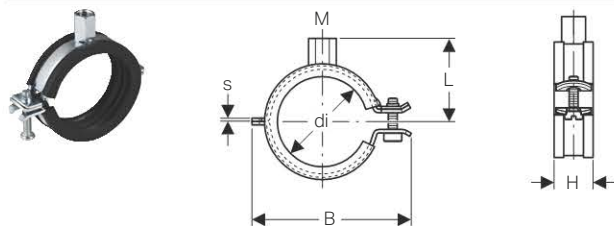

Application purposes

- For fastening Geberit Mapress system pipes
- For fastening Geberit PushFit system pipes, ML
- For fastening Geberit Mepla system pipes, ML
- For fastening Geberit Volex system pipes, ML

Characteristics


- Quick-lock
- Screw with slotted head and crosshead
- Threaded socket four-times welded
- Sound insulation in accordance with DIN 4109
- Zinc-plated

Technical data

Material	Steel
----------	-------

Art. no.	Surface	M [mm]	di, \varnothing [mm]	s [mm]	B [cm]	H [cm]	L [cm]	SU2 [pc.]	GBP/pc.
601.850.26.1	galvanized	8 / 10	12–14	1.5	4.7	2.3	2.9	50	1.37
601.851.26.1	galvanized	8 / 10	15–19	1.5	5.2	2.3	3.1	50	1.37
601.852.26.1	galvanized	8 / 10	20–24	1.5	5.6	2.3	3.4	50	1.37
601.853.26.1	galvanized	8 / 10	25–30	1.5	6.3	2.3	3.6	50	1.48
601.854.26.1	galvanized	8 / 10	32–37	1.5	6.8	2.3	3.9	50	1.59
601.855.26.1	galvanized	8 / 10	40–46	2	7.6	2.3	4.3	50	1.71
601.857.26.1	galvanized	8 / 10	54–58	2	8.9	2.3	4.8	50	2.06
601.858.26.1	galvanized	8 / 10	63–67	2	10	2.3	5.5	50	2.73
601.859.26.1	galvanized	8 / 10	74–80	2	11.9	2.3	6.4	50	2.84
601.860.26.1	galvanized	8 / 10	83–91	2	13	2.3	6.8	50	2.96
601.861.26.1	galvanized	8 / 10	108–114	2.5	15.3	2.8	8.1	25	3.41

Geberit double nipple



Application purposes

- For building drainage

Characteristics


- Reduced
- Zinc-plated

Technical data

Material	Steel
----------	-------

Art. no.	Surface	G ["]	M [mm]	H [cm]	SW [mm]	SU1 [pc.]	GBP/pc.
362.856.26.1	galvanized	1/2	10	2.8	22	1	1.75

Geberit threaded pipe



Application purposes

- For fastening Geberit pipe brackets to base plates
- For building drainage
- For anchor point and sliding bracket fastenings

Characteristics



- Female thread continuously threaded
- Zinc-plated

Technical data

Material	Steel
----------	-------

Art. no.	G ["]	D [cm]	L [m]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
362.857.26.1	1/2	2.5	1	2	1	22.51

Geberit base plate, square, two-hole, with threaded socket M8 / M10



Application purposes

- For building drainage
- For fastening pipe brackets to the building structure
- For fastening pipes to ceilings and walls
- For fastening support rails to the building structure
- For sliding bracket fastening of pipes

Characteristics


- Female thread
- Zinc-plated
- Two fastening points

Technical data

Material	Steel
----------	-------

Art. no.	M [mm]	a [cm]	B [cm]	H [cm]	h [cm]	L [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
362.848.26.1	8 / 10	5.4	3	1.9	0.3	8	50	1	2.80

Geberit base plate, square, two-hole, with threaded socket M10 / G 1/2

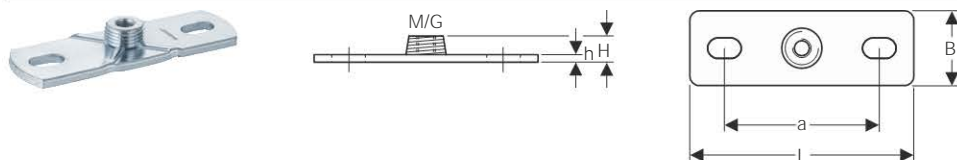

Application purposes

- For fastening pipe brackets to the building structure
- For fastening pipes to ceilings and walls
- For anchor point and sliding bracket fastenings

Characteristics

- Male thread
- Female thread
- Zinc-plated
- Two fastening points


Technical data

Material	Steel
----------	-------

Art. no.	G ["]	M [mm]	a [cm]	B [cm]	H [cm]	h [cm]	L [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
362.851.26.1	1/2	10	8.5	4	1.5	0.5	12	50	1	2.51

3.5.5 Connector fastenings

Geberit mounting plate, straight, single

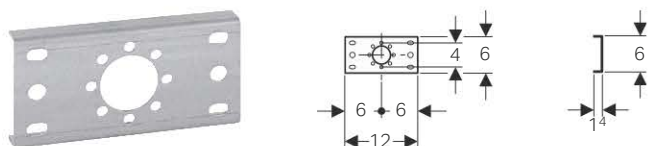

Application purposes

- For fastening Geberit Mepla connections
- For fastening Geberit Mappress connections

Characteristics

- Zinc-plated

Technical data


Material	Steel
----------	-------

Scope of delivery

- Fastening material

Art. no.	SU3 [pc.]	SU2 [pc.]	GBP/pc.
601.736.00.1	40	5	2.93

Geberit mounting plate, straight, double, connecting distance 10 cm or 12 cm

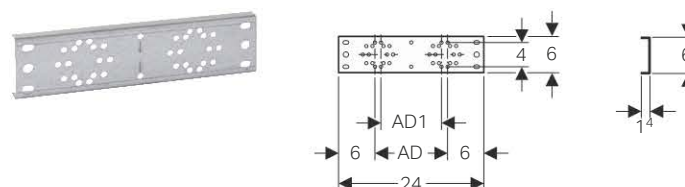

Application purposes

- For fastening Geberit Mepla connections
- For fastening Geberit Mappress connections

Characteristics

- Zinc-plated

Technical data

Material	Steel
----------	-------

Scope of delivery


- Fastening material

Art. no.	AD [cm]	AD1 [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
601.738.00.1	12	10	50	5	7.03

Accessories

- Drain pipe bracket for Geberit mounting plates → p. 93

Geberit mounting plate, straight, double, connecting distance 7.3 cm or 15.3 cm

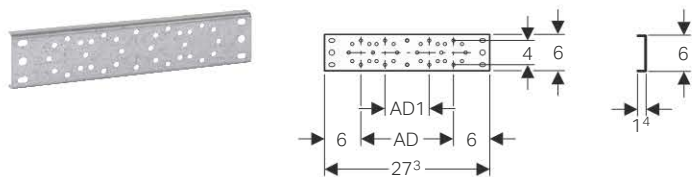

Application purposes

- For fastening Geberit Mepla connections
- For fastening Geberit Mapress connections

Characteristics

- Zinc-plated

Technical data

Material	Steel
----------	-------

Scope of delivery


- Fastening material

Art. no.	AD [cm]	AD1 [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
601.737.00.1	15.3	7.3	1500	50	5	3.90

Accessories

- Drain pipe bracket for Geberit mounting plates → p. 93

Geberit mounting plate, offset, single

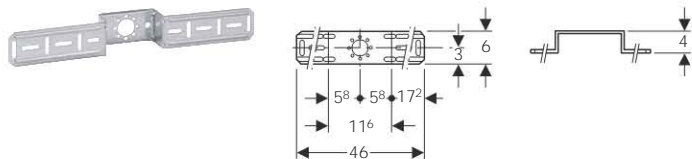

Application purposes

- For fastening Geberit Mepla connections
- For fastening Geberit Mapress connections

Characteristics

- Zinc-plated

Technical data


Material	Steel
----------	-------

Scope of delivery

- Fastening material

Art. no.	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
601.733.00.1	400	25	5	4.27

Geberit mounting plate, offset, double, connecting distance 10 cm or 12 cm

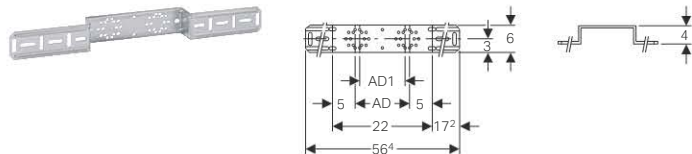

Application purposes

- For fastening Geberit Mepla connections
- For fastening Geberit Mapress connections

Characteristics

- Zinc-plated

Technical data

Material	Steel
----------	-------

Scope of delivery


- Fastening material

Art. no.	AD [cm]	AD1 [cm]	SU4 [pc.]	SU2 [pc.]	GBP/pc.
601.731.00.1	12	10	420	5	5.02

Accessories

- Drain pipe bracket for Geberit mounting plates → p. 93

Geberit mounting plate, offset, double, connecting distance 7.3 cm or 15.3 cm

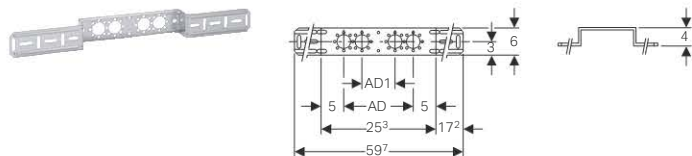

Application purposes

- For fastening Geberit Mepla connections
- For fastening Geberit Mapress connections

Characteristics

- Zinc-plated

Technical data

Material	Steel
----------	-------

Scope of delivery


- Fastening material

Art. no.	AD [cm]	AD1 [cm]	SU4 [pc.]	SU2 [pc.]	GBP/pc.
601.732.00.1	15.3	7.3	420	5	4.45

Accessories

- Drain pipe bracket for Geberit mounting plates → p. 93

Drain pipe bracket for Geberit mounting plates

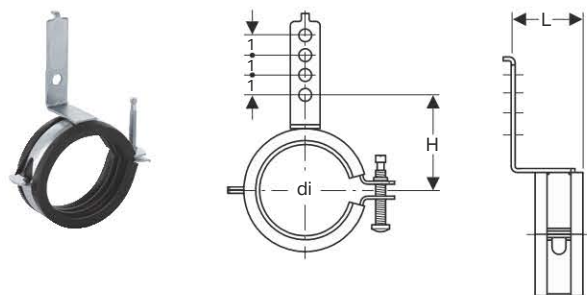

Characteristics

- Sound-absorbing
- Zinc-plated

Technical data

Material	Steel
----------	-------

Scope of delivery

- Fastening material

Art. no.	di, \varnothing [mm]	H [cm]	L [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
601.741.00.1	50-56	5.2-5.5	3.5	25	5	1	2.88

Geberit mounting aid set for straight connector, for drywall construction



Characteristics

- Reusable

Scope of delivery

- Stud bolt G 1/2"
- Protection box

Art. no.	G ["]	SU2 [pc.]	GBP/pc.
601.744.00.1	1/2	2	9.89

3.5.6 System seals

Geberit Mapress seal ring, CIIR, black



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Copper → p. 158

Characteristics

- Silicone-free (LABS-free)

Technical data

Operating temperature	-30 - +120 °C
Material	CIIR

Art. no.	DN	d, \varnothing [mm]	SU2 [pc.]	GBP/pc.
90401	10	12	10	0.29
90402	12	15	10	0.29
90403	15	18	10	0.38
90404	20	22	10	0.38
90405	25	28	10	0.42
90406	32	35	10	0.42
90407	40	42	10	0.61
90408	50	54	10	0.61

Geberit Mapress seal ring, EPDM, black



Application purposes

- For technical building systems, industry and shipbuilding
- For Geberit Mapress Copper pressing sockets
- Application overview: Geberit Mapress Copper → p. 158

Characteristics

- Silicone-free (LABS-free)

Technical data

Operating temperature	-30 - +120 °C
Material	EPDM

Art. no.	DN	d, \varnothing [mm]	SU1 [pc.]	GBP/pc.
90465	65	66.7	1	0.99
90466	65	76.1	1	1.38
90467	80	88.9	1	1.76
90468	100	108	1	3.38

Geberit Mapress seal ring, FKM, blue



Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Copper → p. 158

Characteristics

- Silicone-free (LABS-free)

Technical data

Operating temperature	-25 - +180 °C
Material	FKM

Art. no.	DN	d, ø [mm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
90881	10	12		10	1.75
90882	12	15	100	10	0.75
90883	15	18	100	10	0.91
90884	20	22	100	10	1.08
90885	25	28	100	10	1.26
90886	32	35	100	10	1.47
90887	40	42	100	10	2.72
90888	50	54	100	10	3.79

Geberit Mapress seal ring, HNBR, yellow



Application purposes


- For natural and liquefied gases
- Application overview: Geberit Mapress Copper → p. 158

Technical data

Operating temperature	-20 - +70 °C
Material	HNBR

Art. no.	DN	d, ø [mm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
90452	12	15	10	1	0.80
90453	15	18	10	1	0.90
90454	20	22	10	1	1.00
90455	25	28	10	1	1.14
90456	32	35	10	1	1.24
90457	40	42	10	1	1.49
90458	50	54	10	1	1.72

Geberit Mapress flat gasket, EPDM, black



Application purposes


- For technical building systems, industry and shipbuilding
- For flat sealing Geberit Mapress screw connections
- Application overview: Geberit Mapress Copper → p. 158

Technical data

Operating temperature	0-100 °C
Material	EPDM

Art. no.	G ["]	di, ø [mm]	D [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
90080	1/2	10	1.85	0.2		10	0.22
90081	3/4	13	2.4	0.2	50	10	0.22
90082	1	19.6	3	0.2		10	0.22
90083	1 1/4	25.6	3.9	0.2		10	0.34
90084	1 1/2	32	4.45	0.2		10	0.46
90085	1 3/4	39	5.05	0.2		10	0.56
90086	2 3/8	51	6.6	0.3		10	1.14

Geberit Mapress flat gasket, FPM, green



Application purposes


- For flat sealing Geberit Mapress screw connections
- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Copper → p. 158

Technical data

Operating temperature	-30 - +180 °C
Material	FPM

Art. no.	G ["]	di, ø [mm]	D [cm]	Z [cm]	SU2 [pc.]	GBP/pc.
90092	3/4	13	2.4	0.2	10	1.22
90094	1	19.6	3	0.2	10	2.14
90095	1 1/4	25.6	3.9	0.2	10	0.93
90096	1 1/2	32	4.45	0.2	10	1.14
90097	1 3/4	39	5.05	0.2	10	1.61
90098	2 3/8	51	6.6	0.3	10	2.95

Geberit Mapress flat gasket Centellen® R WS 3825

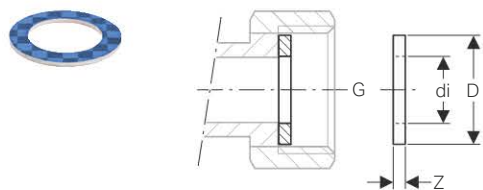

Application purposes


- For technical building systems, industry and shipbuilding
- For flat sealing Geberit Mapress screw connections
- Application overview: Geberit Mapress Copper → p. 158

Technical data

Operating temperature	-30 - +150 °C
Material	Centellen® R WS 3825

Art. no.	G ["]	di, ø [mm]	D [cm]	Z [cm]	SU2 [pc.]	GBP/pc.
600.021.00.1	1/2	10	1.8	0.2	5	0.91
600.022.00.1	3/4	13	2.4	0.2	5	0.93
600.023.00.1	1	20	3	0.2	5	0.95
600.024.00.1	1 1/8	21	3.5	0.2	5	1.12
600.025.00.1	1 1/4	26	3.9	0.2	5	1.18
600.026.00.1	1 1/2	32	4.5	0.2	5	1.22
600.027.00.1	1 3/4	39	5.1	0.2	5	1.28
600.028.00.1	2	42	5.6	0.2	5	1.36
600.029.00.1	2 1/4	42	6.3	0.2	5	1.41
600.030.00.1	2 3/8	51	6.6	0.2	5	1.52
600.031.00.1	2 1/2	54	7.2	0.2	5	1.72
600.032.00.1	2 3/4	57	7.8	0.2	5	2.08
600.033.00.1	3	72	8.5	0.2	5	2.26
600.034.00.1	3 1/2	85	9.7	0.2	5	2.55

Geberit Mapress flat gasket Centellen® HD WS 3822

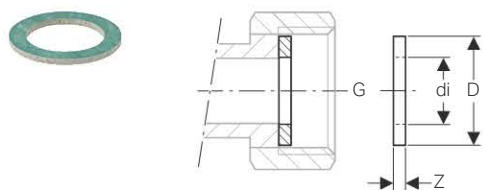

Application purposes

- For technical building systems, industry and shipbuilding
- For flat sealing Geberit Mapress screw connections
- Application overview: Geberit Mapress Copper → p. 158

Technical data

Operating temperature	-20 - +70 °C
Material	Centellen® HD WS 3822

Art. no.	G ["]	di, ø [mm]	D [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
90072	3/4	13	2.4	0.2	1	1.53
90074	1	19.6	3	0.2	1	1.53
90075	1 1/4	25.6	3.9	0.2	1	2.29
90076	1 1/2	32	4.45	0.2	1	2.29
90077	1 3/4	39	5.05	0.2	1	3.06
90078	2 3/8	51	6.6	0.3	1	3.83

O-ring set for Geberit Mepla screw unions, conical sealing



Application purposes

- For natural and liquefied gases
- Application overview: Geberit Mapress Copper → p. 158

Characteristics

- Yellow

Technical data

Operating temperature	-20 - +70 °C
Material	HNBR

Scope of delivery

- Set of 2 pieces

Art. no.	G ["]	di, ø [mm]	s [mm]	SU1 [pc.]	GBP/pc.
242.520.00.1	7/8	20.35	1.78	1	3.39
242.521.00.1	1 1/8	25.07	2.62	1	4.51

Geberit flange gasket PN 6



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Copper → p. 158

Technical data


Operating temperature	-30 - +180 °C
Material	Centellen® HD WS 3822

Art. no.	DN	di, ø [mm]	D [cm]	Z [cm]	PN [bar]	SU1 [pc.]	GBP/pc.
91041	15	20	4.4	0.2	6	1	1.49
91042	20	25	5.4	0.2	6	1	1.83
91043	25	30	6.4	0.2	6	1	2.16
91044	32	38	7.6	0.2	6	1	2.66
91045	40	45	8.6	0.2	6	1	3.34
91046	50	57	9.6	0.2	6	1	3.85
91047	65	76	11.6	0.2	6	1	4.34
91048	80	89	13.2	0.2	6	1	5.84
91049	100	108	15.2	0.2	6	1	6.67

Geberit Mapress Copper

Accessories for Geberit Mapress Copper
Sets of bolts for flange connections

Geberit flange gasket PN 10/16



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Copper → p. 158


Technical data

Operating temperature	-30 - +180 °C
Material	Centellen® HD WS 3822

Art. no.	DN	di, ø [mm]	D [cm]	Z [cm]	PN [bar]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
91031	15	20	5	0.2	10 / 16		1	1.18
91032	20	25	6	0.2	10 / 16	5	1	1.43
91033	25	30	7	0.2	10 / 16	5	1	1.71
91034	32	38	8.2	0.2	10 / 16	5	1	2.10
91035	40	45	9.2	0.2	10 / 16	5	1	2.62
91036	50	57	10.7	0.2	10 / 16	5	1	3.00
91037	65	76	12.7	0.2	10 / 16	5	1	3.41
91038	80	89	14.2	0.2	10 / 16	5	1	4.20
91039	100	108	16.2	0.2	10 / 16	5	1	5.25

3.5.7 Sets of bolts for flange connections

Geberit bolt set for flange connection, made of CrNi steel



Application purposes

- For flanges made of stainless steel, gunmetal and brass

Characteristics

- Steel type A2, strength class 70, EN ISO 3506-1

Technical data


Material	CrNi steel 1.4301 (EN 10088)
----------	------------------------------

Scope of delivery

- Bolt
- 2 washers
- Nut

Art. no.	M [mm]	m [mm]	L [cm]	IK [cm]	SU2 [pc.]	GBP/pc.
91164	10	11	4.5	3.1	4	1.64
91165	10	11	5	3.6	4	1.64
91166	12	14	5	3	4	2.06
91167	12	14	5.5	3.5	4	2.06
91168	12	14	6	4	4	1.57
91169	16	18	5.5	3.3	4	1.87
91170	16	18	6	3.8	4	1.87
91171	16	18	6.5	4.3	4	1.87
91172	16	18	7	4.8	4	1.87
91173	16	18	8	5.8	4	1.87

Geberit bolt set for flange connection, made of steel zinc-plated



Application purposes

- For flanges made of carbon steel, gunmetal and brass

Characteristics

- Zinc-plated
- Strength class 8.8, EN 20898-2

Technical data

Material	Steel
----------	-------

Scope of delivery

- Bolt
- 2 washers
- Nut

Art. no.	M [mm]	m [mm]	L [cm]	IK [cm]	SU2 [pc.]	GBP/pc.
91064	10	11	4.5	3.1	4	1.66
91065	10	11	5	3.6	4	1.66
91066	12	14	5	3	4	1.66
91067	12	14	5.5	3.5	4	1.66
91068	12	14	6	4	4	1.66
91069	16	18	5.5	3.3	4	1.66
91070	16	18	6	3.8	4	1.66
91071	16	18	6.5	4.3	4	1.66
91072	16	18	7	4.8	4	1.66
91073	16	18	8	5.8	4	1.66



4. Pipe Valve Fittings


4.1	Straight-seat valves	218
4.1.1	With Mepla pressing connections	218
4.1.2	With Mapress pressing connections.....	219
4.2	Straight-seat valves for concealed installation	220
4.2.1	With Mepla pressing connections	220
4.2.2	With Mapress pressing connections.....	221
4.2.3	With threaded connections.....	222
4.3	Angle-seat valves	222
4.3.1	With Mepla pressing connections	222
4.3.2	With Mapress pressing connections.....	224
4.4	Ball valves	225
4.4.1	With Mepla pressing connections	225
4.4.2	With Mapress pressing connections.....	226
4.4.3	With Mapress pressing connections, FKM, blue.....	231
4.5	Ball valves for concealed installation	232
4.5.1	With Mepla pressing connections	232
4.5.2	With Mapress pressing connections.....	233
4.6	Non-return valves	234
4.6.1	With Mapress pressing connections.....	234
4.7	Water meter sections for concealed installation	236
4.7.1	With threaded connections.....	236



4.1 Straight-seat valves

4.1.1 With Mepla pressing connections

Geberit Mepla straight-seat stop valve

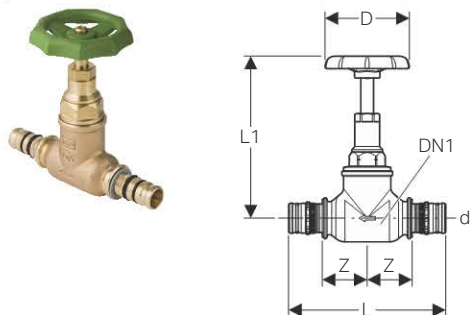

Application purposes

- For cold and hot potable water
- For heating water
- For cooling water without antifreeze agent
- For cooling water with antifreeze agent
- For compressed air (oil purity class 0–3)
- For compressed air up to 6 bar / 600 kPa operating pressure

Characteristics

- Valve top fully exposed to flow
- Valve body made of gunmetal
- Upper part made of brass
- Maintenance-free spindle seal with self-lubricating lip seal made of EPDM
- Valve and upper part seals made of EPDM
- \varnothing 26 mm, with connection for emptying valve, closed
- Leaky if unpressed
- O-ring made of EPDM
- Pressing nipple with transparent protective cap

Art. no.	DN	DN	d, \varnothing [mm]	D [cm]	L [cm]	L1 [cm]	Z [cm]	PN [bar]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
601.030.00.1	12	15	16	6	10.6	10.5	2.7	10	10	1	44.71
602.030.00.1	15	15	20	6	11.7	10.5	3	10	10	1	47.35
603.030.00.1	20	20	26	6	12.9	10.9	3.2	10	10	1	57.85
604.030.00.1	25	25	32	7	13.3	13.7	3.7	10	10	1	73.64
605.030.00.1	32	32	40	7	16.3	16.2	4.7	10	4	1	107.83

Accessories

- Geberit set of marking discs, red → p. 211

Geberit emptying valve



Application purposes

- For cold and hot potable water
- For heating water
- For cooling water without antifreeze agent
- For cooling water with antifreeze agent

Characteristics


- Screw cap

Technical data

Material	Gunmetal (CuSn5Zn5Pb2-C)
----------	--------------------------

Art. no.	DN	G ["]	L [cm]	L1 [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
241.576.00.1	8	1/4	4.5	3.5	4	1	13.99

Geberit set of marking discs, red




Scope of delivery

- 20 pieces, ø 25 mm
- 20 pieces, ø 35 mm

Art. no.	SU2 [pc.]	SU1 [pc.]	GBP/pc.
241.577.00.1	10	1	5.38

4.1.2 With Mapress pressing connections

Geberit Mapress straight-seat stop valve

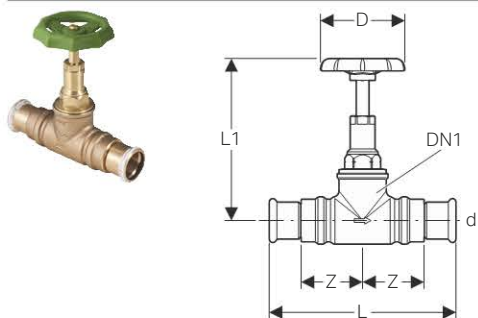

Application purposes

- For cold and hot potable water
- For heating water
- For cooling water without antifreeze agent
- For cooling water with antifreeze agent
- For compressed air (oil purity class 0–3)
- For compressed air up to 6 bar / 600 kPa operating pressure

Characteristics

- Valve top fully exposed to flow
- Valve body made of gunmetal
- Upper part made of brass
- Maintenance-free spindle seal with self-lubricating lip seal made of EPDM
- Valve and upper part seals made of EPDM
- ø 22 mm with connection for emptying valve, closed
- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Operating temperature	0–95 °C
-----------------------	---------

Art. no.	DN	DN	d, ø [mm]	D [cm]	L [cm]	L1 [cm]	Z [cm]	PN [bar]	SU1 [pc.]	GBP/pc.
94862	15	15	15	6	13	10.5	4.5	16	1	47.03
94863	15	15	18	6	13.2	10.5	4.6	16	1	49.65
94864	20	20	22	6	14.2	10.9	5	16	1	57.49
94865	25	25	28	7	15.8	13.7	5.6	16	1	73.16
94866	32	32	35	7	17.2	16.2	6	16	1	94.05


Accessories

- Geberit set of marking discs, red → p. 219

Pipe Valve Fittings

Straight-seat valves for concealed installation
With Mepla pressing connections

Geberit set of marking discs, red



Scope of delivery


- 20 pieces, \varnothing 25 mm
- 20 pieces, \varnothing 35 mm

Art. no.	SU2 [pc.]	SU1 [pc.]	GBP/pc.
241.577.00.1	10	1	5.38

4.2 Straight-seat valves for concealed installation

4.2.1 With Mepla pressing connections

Geberit Mepla concealed stop valve with cover collar

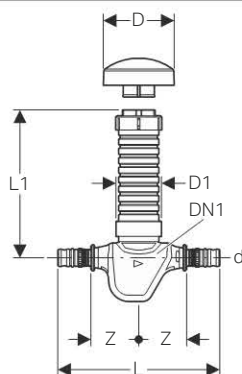

Application purposes

- For cold and hot potable water
- For heating water
- For cooling water without antifreeze agent
- For cooling water with antifreeze agent

Characteristics

- Valve top fully exposed to flow
- Maintenance-free spindle seal
- Replaceable upper part
- Protection box can be cut to length

- Valve and upper part seals made of EPDM
- Leaky if unpressed
- O-ring made of EPDM
- Pressing nipple with transparent protective cap

Technical data

Material	Gunmetal (CuSn5Zn5Pb2-C)
----------	--------------------------


Scope of delivery

- Cover collar, chrome-plated
- Colour markings (red, blue)

Art. no.	PO	DN	DN	d, \varnothing [mm]	D [cm]	D1 [cm]	L [cm]	L1 [cm]	Z [cm]	PN [bar]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
601.022.00.1	PO	12	15	16	7	3.9	13.1	11	4	10		1	77.58
602.022.00.1	PO	15	20	20	7	3.9	13.7	11	4	10	12	1	77.58
603.022.00.1	PO	20	20	26	7	3.9	14.7	11	4.1	10	12	1	73.90

PO: Phase out as of April 2017

Turn handle set for Geberit concealed stop valve



Characteristics

- Chrome-plated


Scope of delivery

- Turn handle, chrome-plated
- Cover collar, chrome-plated
- Retainer with slip-on spindle and transition bushing
- Colour markings (red, blue)

Art. no.	DN	SU2 [pc.]	SU1 [pc.]	GBP/pc.
461.082.00.1	15 / 20 / 25	10	1	23.17

4.2.2 With Mapress pressing connections

Geberit Mapress concealed stop valve with cover collar

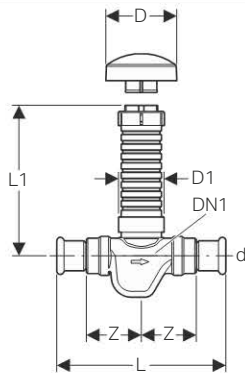

Application purposes

- For cold and hot potable water
- For heating water
- For cooling water without antifreeze agent
- For cooling water with antifreeze agent

Characteristics

- Valve top fully exposed to flow
- Maintenance-free spindle seal
- Replaceable upper part
- Protection box can be cut to length
- Valve and upper part seals made of EPDM

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Operating temperature	0–95 °C
Material	Gunmetal (CuSn5Zn5Pb2-C)


Scope of delivery

- Cover collar, chrome-plated
- Colour markings (red, blue)

Art. no.	DN	DN	d, ø [mm]	D [cm]	D1 [cm]	L [cm]	L1 [cm]	Z [cm]	PN [bar]	SU1 [pc.]	GBP/pc.
94902	15	15	15	7	3.9	14	11	4.9	16	1	70.08
94903	18	15	18	7	3.9	14	11	55	16	1	77.08
94904	20	20	22	7	3.9	14.5	11	55	16	1	77.08
94905	25	25	28	7	4.6	18	11.5	6.8	16	1	117.59

4.2.3 With threaded connections

Turn handle set for Geberit concealed stop valve



Characteristics

- Chrome-plated

Scope of delivery


- Turn handle, chrome-plated
- Cover collar, chrome-plated
- Retainer with slip-on spindle and transition bushing
- Colour markings (red, blue)

Art. no.	DN	SU2 [pc.]	SU1 [pc.]	GBP/pc.
461.082.00.1	15 / 20 / 25	10	1	23.17

4.3 Angle-seat valves

4.3.1 With Mepla pressing connections

Geberit Mepla angle-seat stop valve



Application purposes

- For cold and hot potable water
- For heating water
- For cooling water without antifreeze agent
- For cooling water with antifreeze agent
- For compressed air (oil purity class 0–3)
- For compressed air up to 6 bar / 600 kPa operating pressure

Characteristics

- Valve top fully exposed to flow
- Valve body made of gunmetal
- Upper part made of brass
- Maintenance-free spindle seal with self-lubricating lip seal made of EPDM
- Valve and upper part seals made of EPDM
- Valve seat made of stainless steel
- Connection for emptying valve, closed
- Leaky if unpressed
- O-ring made of EPDM
- Pressing nipple with transparent protective cap

Art. no.	DN	DN	d, ø [mm]	D [cm]	L [cm]	L1 [cm]	L2 [cm]	Z [cm]	Z1 [cm]	PN [bar]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
601.032.00.1	15	15	16	6	12.2	3.4	9.5	2.1	5	10	10	1	49.97
602.032.00.1	15	15	20	6	12.7	3.3	9.5	2.1	4.9	10	10	1	52.61
603.032.00.1	20	20	26	6	14.7	2.6	10.2	2.2	5.9	10	10	1	60.11
604.032.00.1	25	25	32	7	15.4	5.6	13.2	2.6	6.9	10	10	1	75.14
605.032.00.1	32	32	40	7	18.6	6.8	15	3.2	8.4	10	4	1	107.72
606.032.00.1	40	40	50	7	19.6	6.2	16	2.3	9.3	10	4	1	176.23

Accessories

- Geberit set of marking discs, red → p. 219

Geberit emptying valve



Application purposes

- For cold and hot potable water
- For heating water
- For cooling water without antifreeze agent
- For cooling water with antifreeze agent

Characteristics


- Screw cap

Technical data

Material	Gunmetal (CuSn5Zn5Pb2-C)
----------	--------------------------

Art. no.	DN	G ["]	L [cm]	L1 [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
241.576.00.1	8	1/4	4.5	3.5	4	1	13.99

Geberit set of marking discs, red




Scope of delivery

- 20 pieces, ø 25 mm
- 20 pieces, ø 35 mm

Art. no.	SU2 [pc.]	SU1 [pc.]	GBP/pc.
241.577.00.1	10	1	5.38

4.3.2 With Mapress pressing connections

Geberit Mapress angle-seat stop valve



Application purposes

- For cold and hot potable water
- For heating water
- For cooling water without antifreeze agent
- For cooling water with antifreeze agent
- For compressed air (oil purity class 0–3)
- For compressed air up to 6 bar / 600 kPa operating pressure

Characteristics

- Valve top fully exposed to flow
- Valve body made of gunmetal
- Upper part made of brass
- Maintenance-free spindle seal with self-lubricating lip seal made of EPDM
- Valve and upper part seals made of EPDM
- Valve seat made of stainless steel
- Connection for emptying valve, closed
- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Operating temperature	0–95 °C
-----------------------	---------

Art. no.	DN	DN	d, ø [mm]	D [cm]	L [cm]	L1 [cm]	L2 [cm]	Z [cm]	Z1 [cm]	PN [bar]	SU1 [pc.]	GBP/pc.
94882	15	15	15	6	9.4	3.7	9	1.5	3.9	16	1	52.26
94883	15	15	18	6	9.5	3.3	9	1.1	4.5	16	1	54.88
94884	20	20	22	6	10.9	3.2	10.5	2.2	4.5	16	1	62.70
94885	25	25	28	7	13	4.4	13.2	2.1	6.3	16	1	78.39
94886	32	32	35	7	15.1	5.6	15.4	2.9	7	16	1	99.30
94887	40	40	42	7	17.8	4.3	16.2	3	8.8	16	1	135.85
94888	50	50	54	9	21.4	5.5	19.3	4.4	10	16	1	164.59

Accessories

- Geberit set of marking discs, red → p. 219

Geberit set of marking discs, red



Scope of delivery


- 20 pieces, ø 25 mm
- 20 pieces, ø 35 mm

Art. no.	SU2 [pc.]	SU1 [pc.]	GBP/pc.
241.577.00.1	10	1	5.38

4.4 Ball valves

4.4.1 With Mepla pressing connections

Geberit Mepla ball valve with lever



Application purposes

- For cold and hot potable water
- For heating water
- For cooling water without antifreeze agent
- For cooling water with antifreeze agent

Characteristics

- Ball and base unit fully exposed to flow
- Lever fastening with screw
- Replaceable upper part
- Ball made of PPSU

- Upper part caulk made of EPDM

- Ball caulks made of silicone
- Leaky if unpressed
- O-ring made of EPDM
- Pressing nipple with transparent protective cap

Technical data


Material	Brass CW617N
----------	--------------

Scope of delivery

- Colour markings (red, blue, green)

Art. no.	DN	DN	d, \emptyset [mm]	L [cm]	L1 [cm]	L2 [cm]	Z [cm]	PN [bar]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
611.061.00.2	12	8	16	10.1	6	9.5	2.4	10	10	1	23.70
612.061.00.2	15	15	20	10.6	6	9.5	2.5	10	10	1	23.89
613.061.00.2	20	15	26	11.6	6	9.5	2.5	10	10	1	25.89
614.061.00.2	25	20	32	11.8	6.5	9.5	3	10	10	1	33.41
615.061.00.2	32	25	40	13.9	7.1	12.4	3.5	10	10	1	54.06
616.061.00.2	40	32	50	15.9	7.7	12.4	3.9	10	5	1	81.09

Actuator lever set, small, for Geberit ball valve



Application purposes

- For lever fastening with screw


Scope of delivery

- Actuator lever
- Bolt
- Colour markings (red, blue, green)

Art. no.	DN	SU2 [pc.]	SU1 [pc.]	GBP/pc.
242.807.00.1	8 / 12 / 15 / 20	10	1	9.09

4.4.2 With Mapress pressing connections

Geberit Mapress ball valve with actuator lever



Application purposes

- For cold and hot potable water
- For heating water
- For cooling water without antifreeze agent
- For cooling water with antifreeze agent

Characteristics

- Ball and base unit fully exposed to flow
- Lever fastening with screw
- Replaceable upper part
- Ball and spindle made of brass, PTFE-coated
- Ball caulks made of PTFE

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data


Operating temperature	-20 - +95 °C
Material	CrNiMo steel 1.4401 (EN 10088)

Scope of delivery

- Colour markings (red, blue, green)

Art. no.	DN	DN	d, ø [mm]	L [cm]	L1 [cm]	L2 [cm]	Z [cm]	PN [bar]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
94942	12	15	15	10.2	5.8	9.2	3.1	16	5	1	61.43
94943	15	15	18	10.4	5.8	9.2	3.2	16	5	1	66.21
94944	20	20	22	11.6	6.1	9.2	3.7	16	5	1	72.53
94945	25	25	28	13.4	7.2	12.4	4.4	16	5	1	94.95
94946	32	32	35	15.4	7.6	12.4	5.1	16	5	1	118.70
94947	40	40	42	17.7	8.3	14.7	5.9	16	5	1	142.42
94948	50	50	54	20.6	8.8	14.7	6.8	16	5	1	172.10

Geberit Mapress ball valve, NPW, with actuator lever



Application purposes

- For heating water
- For cooling water without antifreeze agent
- For cooling water with antifreeze agent
- For compressed air (oil purity class 0–3)
- For installations with Geberit Mapress Carbon Steel
- For installations with Geberit Mapress Copper

Characteristics

- Ball made of brass, chrome-plated
- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Operating temperature	-20 - +120 °C
Material	Brass CW617N

Art. no.	DN	DN	d, ø [mm]	L [cm]	L1 [cm]	L2 [cm]	Z [cm]	Z1 [cm]	PN [bar]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
94922	12	15	15	7.7	4.4	8.5	1.7	2.4	16	25	1	14.01
94923	15	15	18	8	4.4	8.5	1.7	2.4	16	25	1	14.78
94924	20	20	22	8.9	5.2	10.6	2.1	2.9	16	25	1	17.48
94925	25	25	28	9.6	5.6	10.6	2.4	3.1	16	25	1	23.13
94926	32	32	35	10.9	6.1	10.6	2.7	3.4	16	10	1	29.82
94927	40	40	42	14.1	7.9	15.5	3.6	4.5	16	10	1	61.58
94928	50	50	54	15.7	9.4	17.5	3.9	4.8	16	5	1	82.54

Extension set for Geberit ball valve, NPW




Scope of delivery

- Spindle extension
- Bolt
- Nut

Art. no.	DN	L [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
94935	15	6	5		1	0.91
94936	20 / 25 / 32	6.5	25		1	1.09
94937	40	6.5		5	1	1.53
94938	50	6.5			1	2.07

Geberit Mapress ball valve, NPW, with actuator lever, flanged

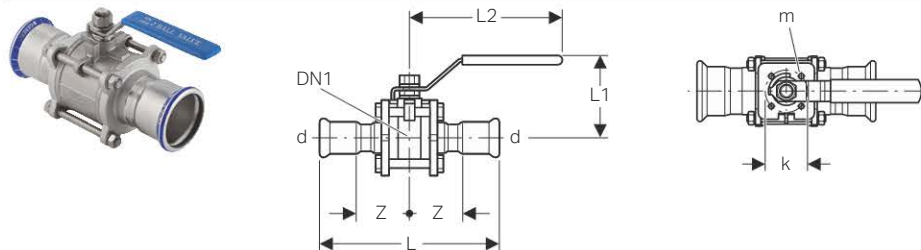

Application purposes

- For heating water
- For cooling water without antifreeze agent
- For cooling water with antifreeze agent
- For remote network heating water $\leq 120\text{ }^{\circ}\text{C}$
- For service water
- For treated water
- For grey and black water with pH value > 6.0
- For extinguishing water (wet)
- For compressed air (oil purity class 0–3)

Characteristics

- Spindle caulk made of PTFE
- Section seal of flange and ball made of PTFE
- Fulfills requirements in accordance with TA Air VDI 2440
- Connecting flange for motor in accordance with EN ISO 5211 (only for $d = 76.1\text{--}108\text{ mm}$)
- Length-adjustable actuator lever (only for $d = 108\text{ mm}$)
- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data


Operating temperature	-20 - +120 °C
Material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	DN	d, \varnothing [mm]	k [mm]	m [mm]	L [cm]	L1 [cm]	L2 [cm]	Z [cm]	PN [bar]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
92100	12	15	15			12.2	5.5	10.5	4.1	40	25	1	66.83
92101	15	15	18			12.2	5.5	10.5	4.1	40	5	1	74.63
92102	20	20	22			13.3	6.1	10.5	4.6	40	2	1	93.56
92103	25	25	28			14.2	7.2	13	4.8	16	5	1	120.29
92104	32	32	35			17	8	13	5.9	16	5	1	147.03
92105	40	40	42			19.4	9.1	16	6.7	16	5	1	200.48
92106	50	50	54			22.1	10.2	16	7.5	16		1	267.29
92107	65	65	76.1	70	9	29.1	14	22.5	9.3	16		1	507.90
92108	80	80	88.9	70	9	33.3	15	36	10.6	16		1	748.42
92109	100	100	108	102	11	41.2	19.2	50	13.1	16		1	1283.03

Accessories

- Actuator lever set, lockable, for Geberit Mapress ball valve, NPW, flanged → p. 230

Geberit Mapress ball valve, NPW, with actuator lever and hose connector, flanged



Application purposes

- For heating water
- For cooling water without antifreeze agent
- For cooling water with antifreeze agent
- For remote network heating water $\leq 120\text{ }^{\circ}\text{C}$
- For service water
- For treated water
- For grey and black water with pH value > 6.0
- For extinguishing water (wet)
- For compressed air (oil purity class 0–3)

Characteristics

- Threaded nipple made of brass, with screw cap
- Spindle caulk made of PTFE
- Section seal of flange and ball made of PTFE
- Fulfils requirements in accordance with TA Air VDI 2440
- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data


Operating temperature	-20 - +120 °C
Material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	DN	d, \varnothing [mm]	G ["]	L [cm]	L1 [cm]	L2 [cm]	Z [cm]	PN [bar]	SU1 [pc.]	GBP/pc.
92110	12	15	15	3/4	12.5	5.5	10.5	4.3	40	1	66.83
92112	20	20	22	1	13.6	6.1	10.5	4.7	40	1	93.56

Accessories

- Actuator lever set, lockable, for Geberit Mapress ball valve, NPW, flanged → p. 230

Geberit MapressCuNiFe ball valve with actuator lever, flanged

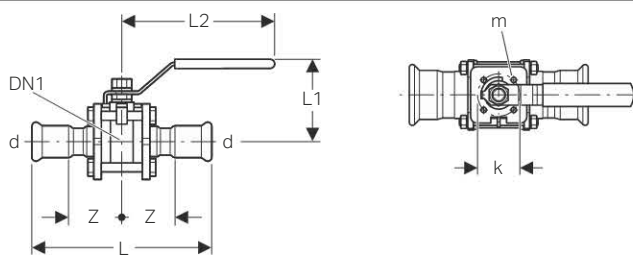

Application purposes

- For heating water
- For cooling water without antifreeze agent
- For cooling water with antifreeze agent
- For service water
- For grey and black water with pH value > 6.0
- For salt water
- For extinguishing water (wet)
- For compressed air (oil purity class 0–3)

- Section seal of flange and ball made of PTFE
- Fulfills requirements in accordance with TA Air VDI 2440
- Connecting flange for motor in accordance with EN ISO 5211 (only for d = 76.1–108 mm)
- Length-adjustable actuator lever (only for d = 108 mm)
- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Characteristics

- Valve made of CrNiMo steel
- Spindle caulk made of PTFE

Technical data


Operating temperature	-20 - +120 °C
Material	CuNi10Fe1.6Mn, material no. 2.1972.11

Art. no.	DN	DN	d, ø [mm]	k [mm]	m [mm]	L [cm]	L1 [cm]	L2 [cm]	Z [cm]	PN [bar]	SU1 [pc.]	GBP/pc.
92120	12	15	15			12.2	5.5	10.5	4.1	13	1	134.59
92122	20	20	22			13.3	6.1	10.5	4.6	13	1	188.42
92123	25	25	28			14.2	7.2	13	4.8	13	1	242.24
92124	32	32	35			17	8	13	5.9	13	1	222.05
92125	40	40	42			19.4	9.1	16	6.7	13	1	302.80
92126	50	50	54			22.1	10.2	16	7.5	13	1	403.74
92127	65	65	76.1	70	9	29.1	14	22.5	9.3	10	1	639.26
92128	80	80	88.9	70	9	33.3	15	36	10.6	10	1	942.05
92129	100	100	108	102	11	41.2	19.2	50	13.1	10	1	1614.93

Accessories

- Actuator lever set, lockable, for Geberit Mapress ball valve, NPW, flanged → p. 230

Geberit MapressCuNiFe ball valve with actuator lever and hose connector, flanged



Application purposes

- For heating water
- For cooling water without antifreeze agent
- For cooling water with antifreeze agent
- For service water
- For grey and black water with pH value > 6.0
- For salt water
- For extinguishing water (wet)
- For compressed air (oil purity class 0–3)

Characteristics

- Threaded nipple made of brass, with screw cap
- Valve made of CrNiMo steel
- Spindle caulk made of PTFE
- Section seal of flange and ball made of PTFE
- Fulfils requirements in accordance with TA Air VDI 2440
- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data


Operating temperature	-20 - +120 °C
Material	CuNi10Fe1.6Mn, material no. 2.1972.11

Art. no.	DN	DN	d, ø [mm]	G ["]	L [cm]	L1 [cm]	L2 [cm]	Z [cm]	PN [bar]	SU1 [pc.]	GBP/pc.
92132	20	20	22	1	13.6	6.1	10.5	4.7	13	1	197.83

Accessories

- Actuator lever set, lockable, for Geberit Mapress ball valve, NPW, flanged → p. 230

Actuator lever set, lockable, for Geberit Mapress ball valve, NPW, flanged



Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------


Scope of delivery

- Lever
- Washer
- Nut

Art. no.	DN	L [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
90765	15	9.5	5	1	7.98
90767	20	11	5	1	10.71
90768	25 / 32	14	5	1	14.10
90769	40 / 50	16.5		1	22.75
90770	65 / 80	35		1	43.23
90771	100	45		1	63.71

4.4.3 With Mapress pressing connections, FKM, blue

Geberit Mapress ball valve, NPW, with actuator lever, flanged (FKM, blue)

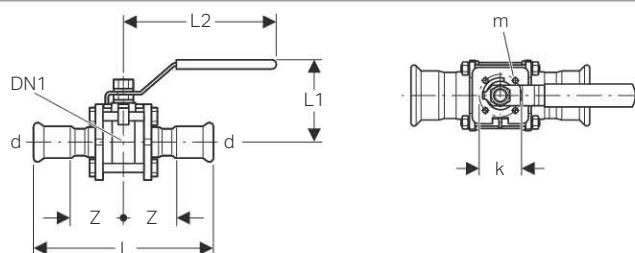

Application purposes

- For compressed air (oil purity class 0–X)

Characteristics

- Pressing socket with black protection plug
- Spindle caulk made of PTFE
- Section seal of flange and ball made of PTFE
- Fulfils requirements in accordance with TA Air VDI 2440

- Connecting flange for motor in accordance with EN ISO 5211 (only for $d = 76.1\text{--}108\text{ mm}$)
- Length-adjustable actuator lever (only for $d = 108\text{ mm}$)
- Pressing indicator
- Leaky if unpressed
- Seal ring made of FKM, blue

Technical data



Operating temperature	-25 - +180 °C
Material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	DN	d, \varnothing [mm]	k [mm]	m [mm]	L [cm]	L1 [cm]	L2 [cm]	Z [cm]	PN [bar]	SU1 [pc.]	GBP/pc.
50780	12	15	15			12.5	5.5	9.5	4.3	16	1	72.38
50782	20	20	22			13.5	6.5	11	4.7	16	1	101.19
50783	25	25	28			14.7	7.5	14	5.1	16	1	129.78
50784	32	32	35			17.3	8	14	6.1	16	1	158.78
50785	40	40	42			19.6	9.5	16.5	6.8	16	1	216.87
50786	50	50	54			22.4	10.5	16.5	7.7	16	1	291.09
50787	65	65	76.1	70	9	30.1	13.5	22	9.8	16	1	560.02
50788	80	80	88.9	70	9	34	14.5	35	11	16	1	817.40
50789	100	100	108	102	11	41.8	17.5	45	13.4	16	1	1409.81

Accessories

- Actuator lever set, lockable, for Geberit Mapress ball valve, NPW, flanged → p. 230

Actuator lever set, lockable, for Geberit Mapress ball valve, NPW, flanged



Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Scope of delivery


- Lever
- Washer
- Nut

Art. no.	DN	L [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
90765	15	9.5	5	1	7.98
90767	20	11	5	1	10.71
90768	25 / 32	14	5	1	14.10
90769	40 / 50	16.5		1	22.75
90770	65 / 80	35		1	43.23
90771	100	45		1	63.71

4.5 Ball valves for concealed installation

4.5.1 With Mepla pressing connections

Geberit Mepla concealed ball valve with cover collar

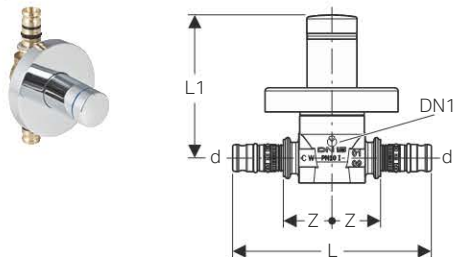

Application purposes

- For cold and hot potable water
- For heating water
- For cooling water without antifreeze agent
- For cooling water with antifreeze agent

Characteristics

- Ball and base unit fully exposed to flow
- Chrome-plated trim parts
- Replaceable upper part
- Ball made of PPSU
- Upper part caulk made of EPDM

- Ball caulks made of silicone
- Leaky if unpressed
- O-ring made of EPDM
- Pressing nipple with transparent protective cap

Technical data


Material	Brass CW617N
----------	--------------

Scope of delivery

- Cover collar with end cap, chrome-plated
- Colour markings (red, blue)
- Wrench

Art. no.	DN	DN	d, Ø [mm]	L [cm]	L1 [cm]	Z [cm]	PN [bar]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
611.021.21.2	12	8	16	10.1	7.5	2.4	10	10	1	23.70
612.021.21.2	15	15	20	10.7	7.6	2.5	10	10	1	23.89
613.021.21.2	20	15	26	11.7	7.6	2.5	10	10	1	25.89

Geberit Mepla concealed ball valve with turn handle

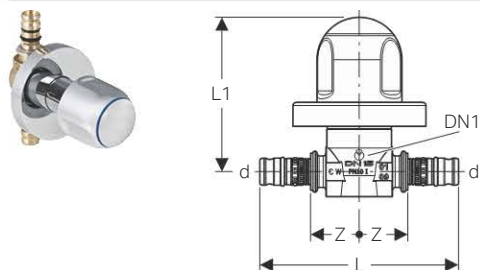

Application purposes

- For cold and hot potable water
- For heating water
- For cooling water without antifreeze agent
- For cooling water with antifreeze agent

Characteristics

- Ball and base unit fully exposed to flow
- Chrome-plated trim parts
- Replaceable upper part
- Ball made of PPSU
- Upper part caulk made of EPDM

- Ball caulks made of silicone
- Leaky if unpressed
- O-ring made of EPDM
- Pressing nipple with transparent protective cap

Technical data

Material	Brass CW617N
----------	--------------


Scope of delivery

- Turn handle, chrome-plated
- Colour markings (red, blue)
- Cover collar, chrome-plated

Art. no.	DN	DN	d, \varnothing [mm]	L [cm]	L1 [cm]	Z [cm]	PN [bar]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
611.011.21.2	12	8	16	10.1	10.2	2.4	10	10	1	32.97
612.011.21.2	15	15	20	10.7	10.3	2.5	10	10	1	33.19
613.011.21.2	20	15	26	11.7	10.3	2.5	10	10	1	36.60

4.5.2 With Mapress pressing connections

Geberit Mapress concealed ball valve with cover collar

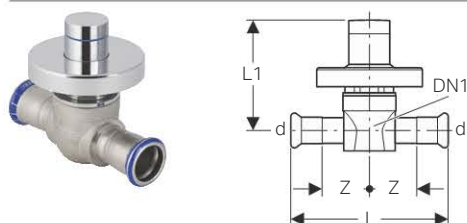

Application purposes

- For cold and hot potable water
- For heating water
- For cooling water without antifreeze agent
- For cooling water with antifreeze agent

Characteristics

- Ball and base unit fully exposed to flow
- Replaceable upper part
- Ball made of brass, chrome-plated
- Upper part caulk made of EPDM
- Ball caulks made of PTFE
- Pressing indicator

- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Operating temperature	0–95 °C
Material	CrNiMo steel 1.4401 (EN 10088)

Scope of delivery


- Cover collar with end cap, chrome-plated
- Colour markings (red, blue)
- Wrench

Art. no.	DN	DN	d, \varnothing [mm]	L [cm]	L1 [cm]	Z [cm]	PN [bar]	SU1 [pc.]	GBP/pc.
94915	12	15	15	10.4	7.5	3.2	16	1	57.47
94916	15	15	18	10.3	7.5	3.2	16	1	58.82
94917	20	20	22	11.7	7.5	3.8	16	1	65.49

4.6 Non-return valves

4.6.1 With Mapress pressing connections

Geberit Mapress non-return valve, NPW, flanged



Application purposes

- For heating water
- For cooling water without antifreeze agent
- For cooling water with antifreeze agent
- For remote network heating water $\leq 120\text{ }^{\circ}\text{C}$
- For service water
- For treated water
- For grey and black water with pH value > 6.0
- For extinguishing water (wet)

Characteristics


- Valve seal made of PTFE
- Section seal of flange made of PTFE
- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Operating temperature	-20 - +120 °C
Material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	DN	d, \varnothing [mm]	L [cm]	Z [cm]	PN [bar]	SU1 [pc.]	GBP/pc.
92140	12	15	15	11.1	3.8	40	1	114.94
92142	20	20	22	12	3.9	40	1	144.34
92143	25	25	28	12.6	4	16	1	173.73
92144	32	32	35	14.7	4.8	16	1	213.86
92145	40	40	42	16.7	5.3	16	1	253.94
92146	50	50	54	18.5	5.8	16	1	392.92
92147	65	65	76.1	25.5	7.5	16	1	694.99
92148	80	80	88.9	28.5	8.3	16	1	1029.12
92149	100	100	108	34.6	9.8	16	1	1416.70

Geberit MapressCuNiFe non-return valve, flanged



Application purposes

- For heating water
- For cooling water without antifreeze agent
- For cooling water with antifreeze agent
- For service water
- For grey and black water with pH value > 6.0
- For salt water
- For extinguishing water (wet)

- Valve seal made of PTFE
- Section seal of flange made of PTFE
- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Characteristics

- Valve made of CrNiMo steel

Technical data


Operating temperature	-20 - +120 °C
Material	CuNi10Fe1.6Mn, material no. 2.1972.11

Art. no.	DN	DN	d, ø [mm]	L [cm]	Z [cm]	PN [bar]	SU1 [pc.]	GBP/pc.
92150	12	15	15	11.1	3.8	13	1	243.06
92152	20	20	22	12	3.9	13	1	305.24
92153	25	25	28	12.6	4	13	1	367.41
92154	32	32	35	14.7	4.8	13	1	339.13
92155	40	40	42	16.7	5.3	13	1	402.75
92156	50	50	54	18.5	5.8	13	1	623.18
92157	65	65	76.1	25.5	7.5	10	1	918.51
92158	80	80	88.9	28.5	8.3	10	1	1360.09
92159	100	100	108	34.6	9.8	10	1	1872.31

4.7 Water meter sections for concealed installation

4.7.1 With threaded connections

Geberit water meter section with concealed stop valve and connector T-piece

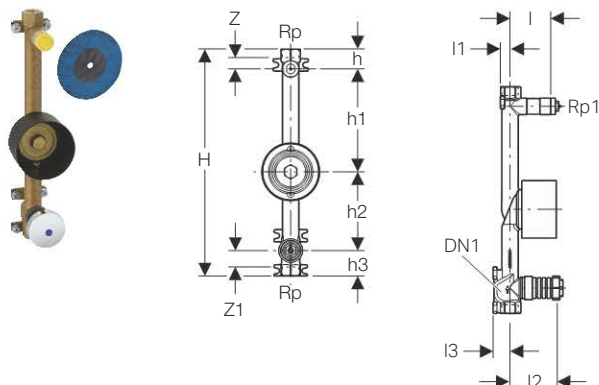

Application purposes

- For cold and hot potable water

Characteristics

- Self-adhesive sealing washer, fleece-laminated
- Can be equipped with a measuring capsule KOAX G 2"
- Replaceable upper part
- Valve and upper part seals made of EPDM
- Protection plug for one-time pressure test with cold water up to a maximum of 15 bar / 1500 kPa

Technical data


Operating temperature	0–90 °C
Material	Gunmetal (CuSn5Zn5Pb2-C)

Scope of delivery

- Cover collar, chrome-plated
- Colour markings (red, blue)
- 3 sound insulation bases
- Sealing washer
- Protection plug
- Fastening material

Art. no.	DN	DN	Rp	Rp1	H	h	h1	h2	h3	I	I1	I2	I3	Z	Z1	PN	SU4	SU2	SU1	GBP/pc.
			["]	["]	[cm]	[cm]	[cm]	[cm]	[cm]	[cm]	[cm]	[cm]	[cm]	[cm]	[cm]	[bar]	[pc.]	[pc.]	[pc.]	
461.096.00.2	20 / 15 / 20	20	3/4	1/2	37.5	3.3	17	13	4.2	6.7	1.6	8	2.8	1.8	2.7	16	100	5	1	159.33

Geberit water section with concealed stop valve and connector T-piece

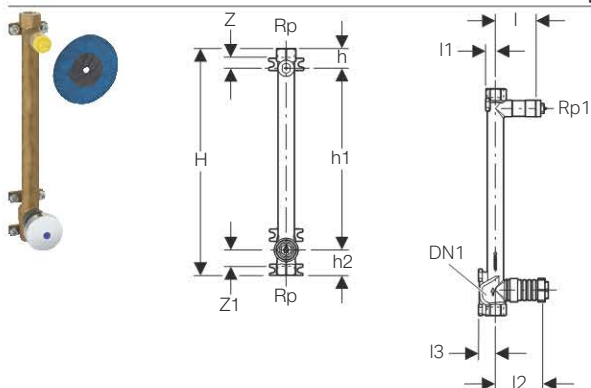

Application purposes

- For cold and hot potable water

Characteristics

- Self-adhesive sealing washer, fleece-laminated
- Replaceable upper part
- Valve and upper part seals made of EPDM
- Protection plug for one-time pressure test with cold water up to a maximum of 15 bar / 1500 kPa

Technical data


Operating temperature	0–90 °C
Material	Gunmetal (CuSn5Zn5Pb2-C)

Scope of delivery

- Cover collar, chrome-plated
- Colour markings (red, blue)
- 3 sound insulation bases
- Sealing washer
- Protection plug
- Fastening material

Art. no.	DN	DN	Rp	Rp1	H	h	h1	h2	I	I1	I2	I3	Z	Z1	PN	SU4	SU2	SU1	GBP/pc.
			["]	["]	[cm]	[cm]	[cm]	[cm]	[cm]	[cm]	[cm]	[cm]	[cm]	[cm]	[bar]	[pc.]	[pc.]	[pc.]	
461.095.00.2	20 / 15 / 20	20	3/4	1/2	37.5	3.3	30	4.2	6.7	1.6	8	2.8	1.8	2.7	16	100	5	1	108.83

Geberit water meter section with concealed stop valve

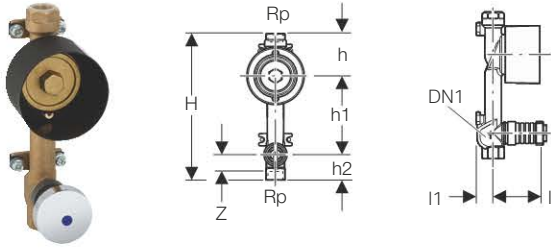

Application purposes

- For cold and hot potable water

Characteristics

- Can be equipped with a measuring capsule KOAX G 2"
- Replaceable upper part
- Valve and upper part seals made of EPDM

Technical data

Operating temperature	0–90 °C
Material	Gunmetal (CuSn5Zn5Pb2-C)

Scope of delivery

- Cover collar, chrome-plated
- Colour markings (red, blue)
- 2 sound insulation bases
- Fastening material

Art. no.	DN	DN	Rp ["]	H [cm]	h [cm]	h1 [cm]	h2 [cm]	l [cm]	l1 [cm]	Z [cm]	PN [bar]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
461.128.00.2	20	20	3/4	24.2	7	13	4.2	8	2.8	2.7	16	60	5	1	58.16

5. Appendix

5.1	Abbreviation	240
5.2	Sales and delivery conditions	241
5.3	Index.....	244



5.1 Abbreviation

Abbreviation	Designation
I1	length, partial dimension (cm)
L2	length (cm)
I2	length, partial dimension (cm)
L3	length (cm)
I3	length, partial dimension (cm)
La	linear expansion (cm)
IK	grip length, screw (cm)
M	metric thread (mm)
m	bolt hole diameter (cm)
n	number of bolts, flange connection (PC)
PN	nominal pressure (bar)
R	taper external thread (")
r	radius (cm)
DN	nominal width
R1	taper external thread (")
Rg	round thread (")
Rp	taper internal pipe thread (")
Rp1	taper internal pipe thread (")
Rp2	taper internal pipe thread (")
S	pipe series
s	wall thickness (mm)
s1	wall thickness (mm)
SW	spanner width (mm)
A	projection (cm)
s ISO	wall thickness (for labels) (mm)
a	partial dimension (cm)
A1	projection (cm)
V	measuring range, volumetric flow rate (l/min)
a1	partial dimension (cm)
AB	connection area (mm)
AB1	connection area (mm)
AB2	connection area (mm)
Acm ²	clear cross-sectional area (cm ²)
AD	connecting distance (cm)
arc	angle (°)
AD1	connecting distance (cm)
B	width (cm)
b	partial dimension (cm)
B1	width (cm)
c	flange hole diameter (mm)
d, ø	outer diameter (mm)
UNC	inch thread
D	outer diameter (cm)
d1, ø	outer diameter (mm)

Abbreviation	Designation
D1	outer diameter (cm)
d2, ø	outer diameter (mm)
d3, ø	outer diameter (mm)
da	outer pipe diameter (mm)
di, ø	inner diameter (mm)
DN/OD	nominal width
DN	nominal width
E	insertion depth (cm)
E1	insertion depth (cm)
G	pipe thread (")
G1	pipe thread (")
X	leg length / L-dimension (cm)
X1	leg length / L-dimension (cm)
G2	pipe thread (")
X2	leg length / L-dimension (cm)
H	height (cm)
X3	leg length / L-dimension (cm)
h	height, partial dimension (cm)
H1	height (cm)
X4	leg length / L-dimension (cm)
h1	height, partial dimension (cm)
X5	leg length / L-dimension (cm)
h2	height, partial dimension (cm)
h3	height, partial dimension (cm)
k	flange, diameter of bolt circle (cm)
X6	leg length / L-dimension (cm)
Z	Z-dimension (cm)
Z1	Z-dimension (cm)
Z2	Z-dimension (cm)
Z3	Z-dimension (cm)
Z4	Z-dimension (cm)
K	maximum cutting (cm)
Z5	Z-dimension (cm)
K1	maximum cutting (cm)
Z6	Z-dimension (cm)
K2	maximum cutting (cm)
K3	maximum cutting (cm)
KL	cable length (cm)
L	length (cm)
l	length, partial dimension (cm)
L	L / length (m)
L1	length (cm)

5.2 Sales and delivery conditions

valid from 1st of April 2017

GENERAL

1. In these Conditions of Sale "The Company" means Geberit Sales Ltd. "The Customer" means the person, firm or company with whom The Company contracts. "The Contract" Any contract between The Company and the Customer for the sale and purchase of the Goods incorporating the Conditions (including any part or parts of them). "The Goods" Any Goods agreed in the Contract to be supplied to the Customer by The Company (including any part or parts of them).
2. These Conditions of Sale apply to and govern any contract between The Company and the Customer to the exclusion of any other conditions contained on, or in, any letter, order form, receipt of similar document emanating from the Customer. No variation of these Conditions of Sale shall be effective unless expressly agreed by The Company in writing.
3. All quotations are for information only and are not to be considered as an offer by The Company. No Contract shall come into existence until an order by the Customer has been accepted by The Company.
- 3.1 Acceptance by The Company of any order shall be on the basis that Goods will be invoiced at the prices contained in The Company's price list current at the date of despatch unless otherwise agreed in writing by The Company.
4. Except where otherwise stated in the contract or in The Company's current price list all prices include the cost of packaging and delivery (but not installation). The Company reserves the right to make additional charges if the Customer requires a method of packaging or delivery different from that normally employed by The Company.
- 4.1 The Customer shall, in addition to the net purchase price, pay to The Company the amount of any Value Added Tax or other sales tax at the rate in force at the time the Goods are invoiced.

GENERAL

5. All Goods will be invoiced at the time of, or soon after, despatch. Payment for the Goods must be received by The Company not later than the last day of the month following the date of the invoice. In the event of late payment The Company reserves the right to charge interest at a rate of 2% per month.
- 5.1 In the event of the Customer postponing delivery, or requesting that The Company suspend the manufacture of the Goods, or failing to give The Company sufficient information to enable it to process any order, the Customer shall pay any additional costs and expenses thereby incurred by The Company.
- 5.2 Unless otherwise agreed in writing by The Company the Customer shall not be entitled to set off against any moneys due to The Company under the Contract any sums claimed by or due to the Customer from The Company under the Contract or any other Contract between The Company and the Customer.

ILLUSTRATION AND DIMENSIONS

6. All information and illustrations contained in brochures, catalogues, price lists, trade literature and advertising material produced by The Company are approximate only, intended to indicate only the general character of the Goods, and do not form any part of any contract between The Company and the Customer.
- 6.1 The dimensions of the Goods are subject to manufacturing tolerances customary within the trade. Dimensions contained in quotations, acknowledgements of orders, or catalogues, price lists, advertising matter and other trade literature are therefore approximate only.

SUBSTITUTED GOODS

7. The Company reserves the right to substitute Goods which are similar to the Goods ordered by the Customer provided that such substituted Goods are no less suitable for the purpose for which they are generally used than Goods ordered by the Customer.

DELIVERY

8. The Company cannot offer a timed delivery service, although we will try to meet the customer needs wherever possible. Any deliveries required outside our delivery schedule will be at the customer's expense.
9. Delivery shall be made to the Customer's premises only.
10. The Customer shall be responsible for unloading the Goods at the point of delivery.
11. The Customer will confirm the goods are received at the time of delivery by signing the Proof Of Delivery document (POD) providing a signature, date and printed name.
12. Immediately on collection or delivery, whichever is appropriate, the Customer shall examine the goods. Any shortages, damages or other delivery discrepancies must be notified directly to the Customer Support team of The Company in writing within three working days of delivery or collection. Credits will not be given if a POD has been signed and there have been no reported anomalies within 3 working days of the delivery date.
13. The Company will use its best endeavours to comply with any delivery date, however, collection or delivery dates and times indicated by the Company shall be regarded as best estimates only. The Company cannot be responsible for any loss or damage whatsoever caused by late delivery where circumstance beyond The Company's control have caused such delay.
14. The Company operates a minimum delivery value requirement for deliveries to the Customer's premises. This currently stands at £500.
15. Orders placed below the minimum order value will be subject to a £10 minimum order value charge.
16. Express orders should be placed before our cut offs for delivery the next day. These orders are subject to a carriage charge to the customer and will be priced based on weight.

RETURNS

17. The Company does not operate a returns policy for saleable stock or for stock that is defective or damaged upon receipt. Any agreed stock return is at the discretion of The Company and only with prior written consent. Where such consent is given, a handling charge of a minimum of 30% of invoiced value will be made.

RISK AND RETENTION OF OWNERSHIP

18. The risk in the Goods contracted to be sold by The Company shall pass to the Customer when the Goods are delivered to or collected by the Customer.
19. Notwithstanding any passing of risk to the Customer, The Company retains ownership of the Goods the subject matter of this Contract the property in which shall not pass to the Customer and the Customer shall keep any Goods delivered to it as bailee for and on behalf of The Company until The Company has received full payment of the price of all Goods (whether or not the Goods are delivered in instalments and some have been paid for by the Customer).
- 19.1 Until ownership of the Goods has passed to the Customer the Customer;
- (i) shall insure the Goods against any loss or damage with an insurance office of repute.
- (ii) shall store the Goods separately or in some other way ensure that they are readily identifiable as the property of The Company.
- (iii) irrevocably authorise the representative of The Company at any time and from time to time (whether or not payment is due) to repossess the Goods and for such purpose to enter any premises occupied by the Customer or where the Goods are or are thought to be and to sever the Goods from anything to which they are attached without being responsible for any damage caused.
- (iv) shall keep the Goods free from any charge, lien or other encumbrance
- 19.2 If, while under The Company's ownership, the Goods or any of them are processed or incorporated into other Goods ("the New Goods") then, provided the Goods remain a readily identifiable and removable part of the New Goods, the provisions of conditions (a) and (b) shall apply.
- 19.3 The Company (acting on its own account, not as agent for the Customer) may sell or agree to sell any of the Goods or the New Goods in The Company's possession on such terms as it may in its sole discretion consider appropriate.
- 19.4 The Company shall be entitled to a general lien over all Goods and materials of the Customer which is in The Company's possession or control from time to time for any sums due at any time whatsoever to The Company.
- 19.5 Nothing in this condition shall confer any right upon the Customer to refuse or delay payment therefore.

LIMITATION OF LIABILITIES

20. Goods may be delivered in cartons, bundles, returnable containers, loose or in other packaging. In any case where it is established to the satisfaction of The Company that the Goods have been damaged or lost (whether wholly or in part) in transit The Company will, at its own cost, repair or replace same provided that
- (i) in the case of partial loss or damage, the Customer has returned to The Company's representative (or where the Goods have been delivered by a Carrier his representative) The Company's receipt note duly signed by the Customer's representative and indicating thereon as shortage of or damage to cartons, bundles, returnable containers, loose Goods or other such packages as shall make up the delivery and full particulars are notified directly to The Company in writing within three working days of delivery;
- (ii) in the case of damage the Goods and their packaging are retained by the Customer for inspection by The Company's representative. The Company will not be liable for any loss or damage in transit, except as above.
- 20.1 Where it is established to the satisfaction of The Company that Goods delivered by them or collected by the Customer, contain at the time of receipt by the Customer some defect in quality (not being a defect caused by some act or neglect of the Customer or a third party) and the Goods are returned to The Company at the Customer's expense within three months of despatch to the Customer, The Company will at its own cost repair or replace them (the choice being at The Company's option).

- 20.2 (c) Save as aforesaid and to the extent permitted by law The Company will not be liable to the Customer for any loss or damage whatsoever suffered as a result of a defect in quality or defective installation or the fact that the Goods are not fit for a particular purpose save for the conditions implied by section 12 of the Sale of Goods Act 1979 and without prejudice to the generality of the foregoing any implied term, condition or warranty statutory or otherwise as to the quality of the Goods sold or their fitness for any particular purpose or as to their correspondence with any description or sample
21. is hereby excluded.
22. No warranty or representation given by or on behalf of The Company including without prejudice to the generality of the foregoing any advice as to the installation quantities use or performance of Goods supplied by The Company shall be binding upon The Company unless specifically stated in writing by The Company to be incorporated in the contract. Nothing in these Conditions excludes or limits the liability of The Company for death or personal injury caused by The Company's negligence or fraudulent misrepresentation.

CONSEQUENTIAL LOSS

23. Without prejudice to the generality of the foregoing provisions The Company shall not in any event be liable to the Customer for any indirect or consequential loss of or damage (whether for loss of profit, loss of business, depletion of goodwill or otherwise) costs, expenses or other claims for consequential compensation whatsoever (howsoever caused) which arise out of or in connection with the Contract.

INSOLVENCY AND BREACH OF CONTRACT

24. The Company shall have the option (without prejudice to any of its other rights against the Customer) by notice in writing to the Customer to rescind the contract or to suspend delivery in the following events:
- (i) should any sum owing by the Customer to The Company be overdue.
- (ii) should the Customer be in breach of any term of the contract with The Company.
- (iii) should the Customer enter into any composition or arrangement with, or for the benefit of its creditors or have a receiving order in bankruptcy made against him or (if a body corporate) should it go into liquidation either voluntary or compulsory or under supervision or have a receiver and/or manager administrative receiver or administrator appointed over all or any part of its assets, or in Scotland should the Customer become notour bankrupt, or sequestered, or a receiver, or judicial factor, or trustee is appointed, for any portion of the Customer's estate or effects or suffer any arrestment charge pending or other diligence to be issued or levied upon the Customer his estate or effects.

HEALTH AND SAFETY

25. As The Company is under a duty pursuant to S 6 of the Health and Safety at Work Act 1974 in respect of the design, manufacture and supply of any article for use at work, the Customer shall be deemed to have been afforded by The Company reasonable opportunity for the testing and examination of Goods or materials in respect of their safety and risk to health prior to delivery to the Customer, and he shall be deemed to have been afforded by The Company adequate information about the Goods and materials in respect of the use for which they are designed, and have been tested, and of any conditions necessary to ensure that when put to that use they will be safe and without risk to health, whether or not the said information has been requested by the Customer.

INDUSTRIAL AND INTELLECTUAL PROPERTY RIGHTS

26. The Company is the proprietor or beneficial owner of patents, registered designs, trademarks and tradenames, copyright or other industrial or intellectual property rights relating to the Goods and The Company reserves all such rights to itself and no authorisation of licence is granted to the Customer to use the Goods or any drawing or specifications relating to the same provided to the Customer by The Company otherwise than for the purpose provided.

FORCE MAJEURE

27. The Company reserves the right to defer the date of delivery or to cancel the Contract or reduce the volume of the Goods ordered by the Customer (without liability to the Customer) if it is prevented from or delayed in the carrying on of its business due to circumstances beyond the reasonable control of the Company including without limitation, acts of God, Governmental actions, war or national emergency, riot, civil commotion, fire, explosion, flood, epidemic, lock out, strikes or other labour disputes (whether or not relating to either party's workforce) or restraints or delays affecting carriers or inability or delay in obtaining supplies of adequate suitable materials.

WAIVER

28. Forbearance or indulgence by The Company shown or granted to the Customer whether in respect of these Conditions of Sale or otherwise, shall not affect or prejudice the rights of The Company against the Customer or be taken as a waiver of any of these Conditions of Sale.

GOVERNING LAW

29. Any contract incorporating these Conditions of Sale shall be governed by and construed in accordance with the laws of England and The Company and the Customer hereby agree to submit to the jurisdiction of the English Courts.

HEADNOTES

30. The head notes to these Conditions have been inserted for convenience and shall not affect their construction.

Conditions Of Sale

Geberit Sales Ltd
Geberit House
Edgehill Drive
Warwick
CV34 6NH

Effective January 2017

5.3 Index

Art. no	Page	Art. no	Page	Art. no	Page	Art. no	Page
12412	115	20305	107	21005	109	21237	111
12413	115	20309	107	21006	109	21238	111
12414	115	20310	107	21007	109	21239	111
12415	115	20311	107	21008	109	21240	111
12416	115	20401	108	21009	109	21241	111
12417	115	20402	108	21010	109	21245	111
12418	115	20403	108	21011	109	21246	111
12419	115	20404	108	21012	109	21247	111
12420	115	20405	108	21101	110	21248	111
12421	115	20406	108	21103	110	21249	111
19201	104	20407	108	21104	110	21250	111
19202	104	20408	108	21105	110	21301	112
19203	104	20501	119	21107	111	21302	112
19204	104	20502	119	21120	113	21304	112
19205	104	20503	119	21121	113	21305	112
19206	104	20505	119	21122	113	21307	112
19207	104	20507	119	21123	113	21308	112
19208	104	20508	119	21127	113	21309	112
19452	104	20551	120	21128	113	21310	112
19453	104	20552	120	21130	113	21311	112
19454	104	20553	120	21131	113	21312	112
19455	104	20555	120	21133	113	21313	112
19456	104	20557	120	21134	113	21314	112
19457	104	20558	120	21201	110	21316	112
19458	104	20559	120	21202	110	21317	112
19459	104	20560	120	21203	110	21318	112
19460	104	20561	120	21204	110	21320	112
19461	104	20562	120	21205	110	21321	112
19462	104	20601	107	21206	111	21322	112
20101	107	20602	107	21207	111	21324	112
20102	107	20603	107	21209	111	21325	112
20103	107	20604	107	21210	111	21326	112
20104	107	20605	107	21211	111	21329	112
20105	107	20609	107	21212	111	21331	112
20109	107	20610	107	21213	111	21334	112
20110	107	20611	107	21214	111	21336	112
20111	107	20612	107	21215	111	21341	113
20112	107	20701	107	21216	111	21342	113
20211	125	20702	107	21217	111	21343	113
20212	125	20703	107	21218	111	21344	113
20213	125	20704	107	21219	111	21345	113
20214	125	20705	107	21220	111	21346	113
20215	125	20709	107	21221	111	21404	114
20216	125	20710	107	21222	111	21406	114
20217	125	20711	107	21223	111	21409	114
20218	125	20801	108	21224	111	21504	114
20219	125	20802	108	21225	111	21505	114
20220	125	20803	108	21226	111	21506	114
20221	125	20804	108	21229	111	21507	114
20222	125	20805	108	21230	111	21509	114
20301	107	21001	109	21231	111	21510	114
20302	107	21002	109	21232	111	21512	114
20303	107	21003	109	21233	111	21609	118
20304	107	21004	109	21234	111	21610	118

Art. no	Page	Art. no	Page	Art. no	Page	Art. no	Page
21611	118	21907	118	22112	105	23617	186
21612	118	21908	118	22301	106	23706	107
21613	118	21910	118	22302	106	23707	107
21615	118	21912	118	22303	106	23708	107
21618	118	21914	118	22304	106	23719	179
21659	119	21916	118	22305	106	23720	179
21660	119	21918	118	22306	106	23721	179
21661	119	21920	118	22307	106	23744	123
21662	119	21922	118	22308	106	23745	123
21700	116	21930	117	22309	106	23746	123
21701	116	21931	117	22310	106	23747	123
21702	116	21932	117	22311	106	23748	123
21703	116	21933	117	22312	106	23749	123
21704	116	21934	117	22313	106	23750	123
21705	116	21935	117	22315	106	23751	123
21707	116	21936	117	22316	106	23754	123
21708	116	21937	117	22317	106	23755	123
21709	116	21938	117	22318	106	23756	123
21710	116	21939	117	22320	106	23757	123
21711	116	21940	117	22321	106	23758	123
21712	116	22001	105	22322	106	23759	123
21713	116	22002	105	22323	106	23760	123
21714	116	22003	105	22324	106	23761	123
21715	116	22004	105	22327	106	23762	123
21716	116	22005	105	22330	106	23764	124
21717	116	22006	105	22331	106	23765	124
21719	116	22007	105	22332	106	23766	124
21720	116	22008	105	22338	106	23767	124
21722	116	22009	105	22339	106	23768	124
21724	116	22010	105	22345	106	23769	124
21725	116	22011	105	22346	106	23770	124
21727	116	22012	105	22348	106	23771	124
21800	117	22023	105	22349	106	23932	125
21801	117	22024	105	22421	30	23933	125
21802	117	22025	105	22422	30	23934	125
21803	117	22050	105	22423	30	23935	125
21804	117	22051	105	22431	30	23936	125
21805	117	22052	105	22432	30	23937	125
21806	117	22053	105	22433	30	23938	125
21807	117	22054	105	22444	30	23939	125
21808	117	22055	105	23106	107	23940	125
21809	117	22056	105	23107	107	23941	125
21810	117	22057	105	23108	107	24002	128
21811	117	22058	105	23306	107	24003	128
21814	117	22059	105	23307	107	24004	128
21818	117	22101	105	23308	107	24005	186
21820	117	22102	105	23509	119	24006	186
21823	117	22103	105	23510	119	24007	186
21824	117	22104	105	23511	119	24042	129
21827	117	22105	105	23602	128	24043	129
21901	118	22106	105	23603	128	24044	129
21902	118	22107	105	23604	128	24052	187
21903	118	22108	105	23606	107	24053	187
21904	118	22109	105	23607	107	24054	187
21905	118	22110	105	23608	107	25042	122
21906	118	22111	105	23615	186	25048	122

Art. no	Page	Art. no	Page	Art. no	Page	Art. no	Page
25049	122	30105	15	31004	17	31247	19
25072	130	30302	15	31005	17	31248	19
25300	121	30303	15	31006	17	31249	19
25302	121	30304	15	31007	17	31250	19
25304	121	30305	15	31008	17	31251	18
25305	121	30402	16	31009	17	31304	20
25306	121	30403	16	31010	17	31305	20
25307	121	30404	16	31011	17	31306	20
25308	121	30405	16	31106	15	31307	20
25309	121	30406	16	31107	15	31308	20
25319	120	30407	16	31108	15	31309	20
25320	120	30408	16	31109	15	31310	20
25321	120	30414	16	31110	15	31311	20
25322	120	30415	16	31111	15	31312	20
25323	120	30602	14	31204	18	31313	20
25324	120	30603	14	31206	18	31316	20
25325	120	30604	14	31207	18	31317	20
25326	120	30605	14	31208	18	31320	20
25329	121	30702	15	31209	18	31321	20
25330	121	30703	15	31210	18	31324	20
25332	121	30704	15	31211	18	31326	20
25335	121	30705	15	31212	18	31329	20
25337	121	30802	16	31213	18	31331	20
25338	121	30803	16	31214	18	31334	20
25339	121	30804	16	31215	18	31336	20
25340	121	30805	16	31216	18	31339	20
29208	104	30872	16	31217	18	31454	19
29209	104	30873	16	31218	18	31455	19
29210	104	30874	16	31219	18	31458	19
29211	104	30875	16	31220	18	31461	19
29251	104	30876	16	31221	18	31464	19
29252	104	30877	16	31222	18	31703	22
29253	104	30878	16	31223	18	31704	22
29254	104	30892	16	31224	18	31705	22
29255	104	30893	16	31225	18	31707	22
29256	104	30894	16	31226	18	31708	22
29257	104	30905	16	31227	18	31709	22
29258	104	30906	16	31228	18	31710	22
30009	16	30907	16	31229	18	31711	22
30010	16	30908	16	31230	18	31713	22
30011	16	30932	16	31231	18	31714	22
30029	16	30933	16	31232	19	31715	22
30030	16	30934	16	31233	19	31716	22
30031	16	30935	16	31234	18	31717	22
30049	16	30936	16	31235	18	31718	22
30050	16	30937	16	31236	19	31719	22
30051	16	30938	16	31237	19	31720	22
30069	16	30942	16	31238	19	31721	22
30070	16	30943	16	31239	19	31722	22
30071	16	30944	16	31240	19	31724	22
30089	16	30955	16	31241	19	31726	22
30090	16	30956	16	31242	18	31731	23
30091	16	30957	16	31243	18	31732	23
30102	15	30958	16	31244	19	31733	23
30103	15	31002	17	31245	19	31734	23
30104	15	31003	17	31246	19	31735	23

Art. no	Page	Art. no	Page	Art. no	Page	Art. no	Page
31736	23	32110	13	33215	33	33933	33
31737	23	32111	13	33216	33	33934	33
31801	23	32303	14	33217	33	33935	33
31802	23	32305	14	33218	33	33936	33
31803	23	32306	14	33219	33	33937	33
31804	23	32307	14	33220	33	33938	33
31805	23	32308	14	33221	33	33939	33
31806	23	32309	14	33306	15	33940	33
31807	23	32310	14	33307	15	33941	33
31809	23	32311	14	33308	15	34000	38
31811	23	32312	14	33309	15	34001	38
31814	23	32313	14	33310	15	34002	38
31818	23	32314	14	33311	15	34003	38
31819	23	32315	14	33403	34	34007	38
31820	23	32316	14	33405	34	34008	38
31821	23	32317	14	33407	34	34009	38
31822	23	32318	14	33423	35	34010	38
31823	23	32319	14	33425	35	34014	38
31824	23	32320	14	33427	35	34015	38
31825	23	32321	14	33503	34	34016	38
31826	23	32322	14	33732	30	34017	38
31932	23	32323	14	33733	30	34021	38
31933	23	32324	14	33734	30	34022	38
31936	23	32331	14	33735	30	34023	38
31937	23	32338	14	33736	30	34024	38
31938	23	32339	14	33737	30	34028	40
31939	23	32345	14	33738	30	34029	40
31940	23	32346	14	33739	30	34030	40
32002	13	32348	14	33740	30	34031	40
32003	13	32606	14	33741	30	34032	40
32004	13	32607	14	33748	31	34033	40
32005	13	32608	14	33749	31	34034	40
32006	13	32609	14	33750	31	34035	41
32007	13	32610	14	33752	31	34036	41
32008	13	32611	14	33802	24	34037	41
32009	13	32706	15	33803	24	34038	41
32010	13	32707	15	33804	24	34039	41
32011	13	32708	15	33805	24	34040	41
32050	12	32709	15	33806	24	34041	41
32051	12	32710	15	33807	24	34042	41
32052	12	32711	15	33833	24	34043	41
32053	12	33001	13	33834	24	34044	41
32054	12	33002	14	33835	24	34045	41
32055	12	33003	14	33836	24	34046	41
32056	12	33004	14	33837	24	34047	41
32057	12	33005	18	33838	24	34048	41
32058	12	33006	18	33839	24	34049	41
32059	12	33007	18	33846	24	34050	41
32102	13	33008	17	33848	24	34051	41
32103	13	33009	22	33850	24	34052	42
32104	13	33010	23	33852	24	34053	42
32105	13	33013	34	33854	24	34054	42
32106	13	33203	25	33860	24	34055	42
32107	13	33212	33	33862	24	34056	42
32108	13	33213	33	33864	24	34057	42
32109	13	33214	33	33932	33	34058	42

Art. no	Page	Art. no	Page	Art. no	Page	Art. no	Page
34059	42	34129	37	34260	37	34466	49
34060	42	34132	37	34261	37	34467	49
34061	42	34133	37	34264	42	34468	49
34063	42	34134	37	34265	42	34469	49
34066	43	34135	37	34266	42	34470	49
34067	43	34136	50	34267	42	34471	49
34068	43	34137	50	34268	42	34500	189
34069	43	34138	50	34269	42	34501	189
34070	43	34139	50	34270	42	34502	189
34071	43	34140	41	34271	42	34503	189
34072	43	34141	41	34285	40	34504	189
34073	43	34142	43	34286	40	34505	189
34074	43	34143	43	34287	40	34506	189
34075	43	34144	45	34296	37	34507	189
34076	43	34145	45	34297	37	34508	189
34077	43	34146	45	34298	37	34509	189
34078	43	34147	45	34346	43	34510	189
34083	44	34148	45	34347	44	34511	189
34084	44	34149	45	34355	43	34512	189
34086	44	34150	45	34400	46	34513	189
34087	44	34151	45	34401	46	34514	189
34089	44	34152	45	34402	46	34515	189
34090	44	34153	45	34403	46	34516	189
34091	44	34154	45	34404	46	34517	189
34092	44	34156	47	34405	46	34518	189
34093	44	34158	47	34406	46	34519	189
34097	41	34159	47	34407	46	34520	189
34098	41	34161	47	34408	46	34521	189
34099	41	34162	37	34409	46	34522	189
34101	36	34169	44	34430	46	34523	189
34102	36	34170	44	34431	46	34524	189
34103	36	34187	38	34432	46	34525	189
34104	36	34188	38	34433	46	34526	189
34105	36	34189	38	34434	46	34527	189
34106	36	34190	38	34435	46	34528	191
34107	36	34191	38	34436	46	34529	191
34108	37	34192	38	34437	46	34530	191
34109	37	34193	38	34438	46	34531	191
34110	37	34194	38	34439	46	34532	191
34111	37	34195	38	34440	46	34533	191
34112	37	34196	38	34441	38	34534	191
34113	37	34197	38	34442	38	34535	191
34114	37	34198	38	34443	38	34536	191
34115	37	34204	47	34444	38	34537	191
34116	37	34205	47	34445	38	34543	191
34117	37	34206	47	34446	38	34544	191
34118	37	34207	47	34447	38	34545	191
34119	37	34208	47	34448	38	34546	191
34120	37	34209	47	34449	38	34547	191
34121	37	34210	47	34450	38	34548	191
34122	37	34211	47	34451	38	34549	191
34123	37	34214	47	34452	38	34550	191
34124	37	34248	36	34462	49	34551	191
34126	42	34249	36	34463	49	34552	195
34127	37	34250	36	34464	49	34553	191
34128	37	34259	37	34465	49	34554	191

Art. no	Page	Art. no	Page	Art. no	Page	Art. no	Page
34555	195	34693	193	35325	25	36103	14
34556	195	34715	195	35326	25	36104	14
34557	195	34725	194	35330	27	36105	14
34588	191	34726	194	35331	27	36106	14
34589	191	34727	194	35332	27	36107	14
34590	191	34728	194	35333	27	36108	14
34601	188	34729	194	35334	27	36109	14
34602	188	34730	194	35335	27	36110	14
34603	188	34731	196	35336	27	36111	15
34604	188	34732	196	35337	27	36113	15
34605	188	34733	196	35338	27	36114	15
34606	188	34735	192	35339	27	36115	15
34607	188	34736	192	35340	27	36116	15
34608	188	34737	192	35350	29	36117	15
34609	188	34738	192	35351	29	36118	15
34610	188	34739	192	35352	29	36119	15
34611	188	34740	192	35353	29	36120	15
34612	188	34752	196	35354	29	36121	14
34613	188	34753	196	35355	29	36123	14
34614	188	34754	196	35356	29	36124	14
34615	188	34755	196	35357	29	36125	14
34616	188	34756	196	35358	29	36126	14
34617	188	34757	196	35359	29	36127	14
34618	188	34758	196	35360	27	36128	14
34619	188	35032	26	35361	27	36129	14
34620	188	35033	26	35362	27	36130	14
34623	188	35034	26	35363	27	36131	15
34624	188	35035	26	35364	27	36133	15
34625	189	35036	26	35365	27	36134	15
34626	189	35037	26	35366	27	36135	15
34627	189	35038	26	35367	27	36136	15
34628	189	35039	26	35368	27	36137	15
34629	189	35040	26	35369	27	36138	15
34666	192	35042	26	35370	27	36139	15
34667	192	35044	26	35380	29	36140	15
34669	192	35045	26	35382	29	36141	32
34670	192	35046	26	35384	29	36142	32
34671	192	35047	26	35386	29	36143	32
34672	192	35075	26	35387	29	36144	32
34673	192	35132	26	35388	29	36145	32
34674	192	35134	26	35389	29	36146	32
34675	192	35300	28	35390	25	36147	32
34676	192	35301	28	35391	25	36148	32
34677	192	35302	28	35392	25	36150	31
34678	192	35303	28	35393	25	36151	31
34679	192	35304	28	35394	25	36152	31
34683	193	35305	28	35395	25	36153	31
34684	193	35306	28	35396	25	36154	31
34685	193	35307	28	35400	28	36155	31
34686	193	35308	28	35402	28	36156	31
34687	193	35309	28	35405	28	36161	15
34688	193	35320	25	35407	28	36163	15
34689	193	35321	25	35408	28	36164	15
34690	193	35322	25	35409	28	36165	15
34691	193	35323	25	35410	28	36166	15
34692	193	35324	25	36101	14	36167	15

Art. no	Page	Art. no	Page	Art. no	Page	Art. no	Page
36168	15	50091	71	50232	73	50366	76
36169	15	50092	71	50233	73	50367	76
36170	15	50093	71	50242	73	50368	76
36171	15	50133	72	50243	73	50369	76
36173	15	50134	72	50244	73	50370	77
36174	15	50135	72	50245	73	50371	77
36175	15	50136	72	50246	73	50372	77
36176	15	50137	72	50247	73	50373	77
36177	15	50138	72	50248	73	50374	77
36178	15	50139	72	50251	73	50375	77
36179	15	50140	72	50252	73	50376	77
36180	15	50141	72	50253	73	50377	77
39042	52	50142	72	50262	73	50378	77
39043	52	50143	72	50264	73	50379	77
39044	52	50144	72	50265	73	50380	77
39045	52	50145	72	50266	73	50381	77
39046	52	50146	72	50267	73	50389	77
39047	52	50147	72	50268	73	50390	77
39048	52	50148	72	50271	73	50391	77
39109	12	50149	72	50272	73	50392	77
39110	12	50150	72	50273	73	50393	77
39111	12	50151	72	50282	73	50395	77
39202	12	50152	72	50283	73	50396	77
39203	12	50153	72	50284	73	50397	77
39204	12	50164	72	50285	73	50398	77
39205	12	50167	72	50286	73	50399	77
39206	12	50168	72	50287	73	50400	77
39207	12	50169	72	50288	73	50401	77
39208	12	50171	72	50291	73	50402	77
39209	12	50172	72	50292	73	50403	77
39210	12	50182	72	50293	73	50404	77
39211	12	50184	72	50312	73	50405	77
39602	12	50185	72	50313	73	50407	77
39603	12	50186	72	50314	73	50408	77
39604	12	50187	72	50315	73	50413	78
39605	12	50188	72	50316	73	50414	78
39606	12	50191	72	50317	73	50415	78
39607	12	50192	72	50318	73	50416	78
39608	12	50193	72	50321	73	50417	78
50062	71	50202	72	50322	73	50418	78
50063	71	50204	72	50323	73	50419	78
50064	71	50205	72	50332	76	50420	78
50065	71	50206	72	50333	76	50421	78
50066	71	50207	72	50334	76	50422	78
50067	71	50208	72	50335	76	50424	78
50068	71	50211	72	50336	76	50425	78
50071	71	50212	72	50337	76	50427	78
50072	71	50213	72	50338	76	50428	78
50073	71	50222	73	50341	76	50429	78
50082	71	50223	73	50342	76	50437	78
50083	71	50224	73	50343	76	50438	78
50084	71	50225	73	50356	76	50440	78
50085	71	50226	73	50357	76	50441	78
50086	71	50227	73	50359	76	50443	78
50087	71	50228	73	50362	76	50444	78
50088	71	50231	73	50364	76	50452	79

Art. no	Page	Art. no	Page	Art. no	Page	Art. no	Page
50453	79	50583	84	50758	88	51142	133
50454	79	50584	84	50761	88	51144	133
50455	79	50585	84	50762	88	51145	133
50456	79	50586	84	50763	88	51146	133
50457	79	50587	84	50772	83	51147	133
50458	79	50588	84	50773	83	51150	133
50459	79	50589	84	50774	83	51151	133
50460	79	50590	84	50775	83	51152	133
50461	79	50591	84	50776	83	51153	133
50463	79	50611	84	50777	83	51164	133
50464	79	50612	84	50778	83	51167	133
50465	79	50613	84	50780	231	51168	133
50466	79	50614	84	50782	231	51169	133
50467	79	50615	84	50783	231	51171	133
50468	79	50616	84	50784	231	51172	133
50471	79	50617	84	50785	231	51221	134
50484	80	50618	84	50786	231	51222	134
50485	80	50619	84	50787	231	51223	134
50486	80	50620	84	50788	231	51224	134
50487	80	50631	84	50789	231	51225	134
50488	80	50632	84	50792	88	51226	134
50489	80	50633	84	50793	88	51227	134
50490	80	50634	84	50794	88	51228	134
50491	80	50635	84	51061	133	51231	134
50492	80	50636	84	51062	133	51232	134
50493	80	50637	84	51063	133	51233	134
50494	80	50638	84	51064	133	51241	134
50495	80	50639	84	51065	133	51242	134
50496	80	50640	84	51066	133	51243	134
50497	80	50652	85	51067	133	51244	134
50498	80	50653	85	51068	133	51245	134
50499	80	50656	85	51071	133	51246	134
50500	80	50661	85	51072	133	51247	134
50524	82	50662	85	51073	133	51248	134
50526	82	50663	85	51081	133	51251	134
50529	82	50664	85	51082	133	51252	134
50532	82	50665	85	51083	133	51253	134
50533	82	50666	85	51084	133	51281	134
50544	82	50667	85	51085	133	51282	134
50546	82	50668	85	51086	133	51283	134
50549	82	50670	85	51087	133	51284	134
50552	82	50673	86	51088	133	51285	134
50553	82	50674	86	51091	133	51286	134
50562	83	50675	86	51092	133	51287	134
50563	83	50676	86	51093	133	51288	134
50564	83	50677	86	51131	133	51291	134
50565	83	50678	86	51132	133	51292	134
50566	83	50679	86	51133	133	51293	134
50567	83	50680	86	51134	133	51311	134
50568	83	50681	86	51135	133	51312	134
50570	83	50752	88	51136	133	51313	134
50571	83	50753	88	51137	133	51314	134
50572	83	50754	88	51138	133	51315	134
50573	83	50755	88	51139	133	51316	134
50581	84	50756	88	51140	133	51317	134
50582	84	50757	88	51141	133	51318	134

Art. no	Page	Art. no	Page	Art. no	Page	Art. no	Page
51321	134	51425	138	51665	144	52147	198
51322	134	51427	138	51666	144	52152	198
51323	134	51428	138	51667	144	52153	198
51331	136	51429	138	51668	144	52222	199
51332	136	51437	138	51669	144	52223	199
51333	136	51438	138	51670	144	52224	199
51334	136	51440	138	51671	144	52225	199
51335	136	51441	138	51675	145	52226	199
51336	136	51443	138	51676	145	52227	199
51337	136	51450	140	51677	145	52228	199
51338	136	51453	140	51678	145	52242	199
51341	136	51454	140	51679	145	52243	199
51342	136	51455	140	51680	145	52244	199
51343	136	51458	140	51681	145	52245	199
51353	136	51461	140	51751	146	52246	199
51354	136	51464	140	51752	146	52247	199
51356	136	51466	140	51753	146	52248	199
51357	136	51468	140	51754	146	52282	199
51359	136	51482	141	51755	146	52283	199
51362	136	51484	141	51756	146	52284	199
51364	136	51486	141	51757	146	52285	199
51366	137	51488	141	51758	146	52286	199
51367	137	51489	141	51761	146	52287	199
51368	137	51490	141	51762	146	52288	199
51369	137	51491	141	51763	146	52312	199
51370	137	51492	141	51772	143	52313	199
51373	137	51493	141	51773	143	52314	199
51374	137	51495	141	51774	143	52315	199
51375	137	51498	141	51775	143	52316	199
51378	137	51500	141	51776	143	52317	199
51379	137	51523	142	51777	143	52318	199
51380	137	51524	142	51778	143	52332	200
51381	137	51526	142	52062	198	52333	200
51390	137	51529	142	52063	198	52334	200
51391	137	51532	142	52064	198	52335	200
51392	137	51548	142	52065	198	52336	200
51393	137	51550	142	52066	198	52337	200
51396	137	51551	142	52067	198	52338	200
51397	137	51552	142	52068	198	52356	201
51398	137	51562	143	52082	198	52359	201
51399	137	51564	143	52083	198	52366	201
51400	137	51567	143	52084	198	52369	201
51405	137	51570	143	52085	198	52370	201
51407	137	51571	143	52086	198	52373	201
51408	137	51572	143	52087	198	52374	201
51411	138	51573	143	52088	198	52375	201
51413	138	51611	143	52133	198	52378	201
51414	138	51613	143	52134	198	52379	201
51416	138	51615	143	52135	198	52380	201
51417	138	51617	143	52136	198	52413	201
51418	138	51618	143	52137	198	52414	201
51419	138	51619	143	52138	198	52416	201
51421	138	51620	143	52141	198	52418	201
51422	138	51653	144	52142	198	52421	201
51423	138	51656	144	52145	198	52424	201
51424	138	51661	144	52146	198	52427	201

Art. no	Page	Art. no	Page	Art. no	Page	Art. no	Page
52453	202	52665	204	60602	162	61191	110
52454	202	52666	204	60603	162	61192	110
52455	202	52667	204	60604	162	61193	110
52456	202	52668	204	60605	162	61194	110
52457	202	52670	204	60606	162	61195	110
52458	202	52752	205	60607	162	61196	110
52460	202	52753	205	60608	162	61197	110
52461	202	52754	205	60610	162	61212	165
52462	202	52755	205	60611	162	61213	165
52464	202	52756	205	60612	162	61214	165
52465	202	52757	205	60613	162	61215	165
52466	202	52758	205	60701	162	61217	165
52468	202	60082	163	60702	162	61218	165
52484	202	60083	163	60703	162	61219	165
52486	202	60084	163	60704	162	61220	165
52488	202	60085	163	60705	162	61225	165
52489	202	60086	163	60706	162	61226	165
52493	202	60087	163	60707	162	61227	165
52495	202	60088	163	60708	162	61228	165
52498	202	60101	162	60710	162	61229	165
52500	202	60102	162	60711	162	61235	164
52524	203	60103	162	60712	162	61236	165
52526	203	60104	162	60713	162	61240	165
52529	203	60105	162	60801	163	61242	165
52532	203	60106	162	60802	163	61243	164
52544	203	60107	162	60803	163	61244	165
52546	203	60108	162	60804	163	61252	164
52549	203	60110	162	60875	163	61253	164
52552	203	60111	162	60876	163	61254	165
52562	203	60112	162	60877	163	61256	165
52564	203	60113	162	60878	163	61257	165
52565	203	60231	179	60905	163	61259	165
52566	203	60232	179	60906	163	61260	165
52567	203	60233	179	60907	163	61261	165
52568	203	60234	179	60908	163	61280	165
52570	203	60235	179	60935	163	61281	165
52571	203	60236	179	60936	163	61282	165
52572	203	60237	179	60937	163	61283	165
52573	203	60238	179	60938	163	61284	165
52611	204	60239	179	60955	163	61285	165
52612	204	60240	179	60956	163	61286	165
52613	204	60241	179	60957	163	61287	165
52614	204	60242	179	60958	163	61288	165
52615	204	60301	162	61000	164	61289	165
52616	204	60302	162	61002	164	61290	165
52617	204	60303	162	61003	164	61292	165
52618	204	60304	162	61004	164	61293	165
52619	204	60305	162	61005	164	61294	165
52620	204	60306	162	61006	164	61295	165
52653	204	60307	162	61007	164	61296	165
52656	204	60308	162	61008	164	61297	165
52657	204	60310	162	61010	164	61352	166
52661	204	60311	162	61011	164	61354	166
52662	204	60312	162	61012	164	61355	166
52663	204	60313	162	61013	164	61357	166
52664	204	60601	162	61104	164	61359	166

Art. no	Page	Art. no	Page	Art. no	Page	Art. no	Page
61360	166	61857	175	62332	161	63889	170
61362	166	61932	168	62333	161	63892	170
61366	166	61933	168	62334	161	63893	170
61370	166	61935	168	62336	161	63894	170
61395	166	61936	168	62337	161	63895	170
61404	166	62001	160	62338	161	65040	177
61406	166	62002	160	62339	161	65044	177
61409	166	62003	160	62340	161	65045	177
61504	167	62004	160	62341	161	65046	177
61505	167	62005	160	63108	127	65050	177
61506	167	62006	160	63109	127	65051	177
61701	168	62007	160	63113	126	65052	177
61702	168	62008	160	63115	126	65053	177
61703	168	62010	160	63117	126	65054	177
61704	168	62011	160	63118	126	65081	177
61705	168	62012	160	63120	126	65082	177
61707	168	62013	160	63452	181	65083	177
61708	168	62020	167	63453	181	65084	177
61709	168	62022	167	63455	181	65085	177
61710	168	62024	167	63457	181	65086	177
61711	168	62050	160	63458	181	65087	177
61714	168	62055	160	63459	181	65088	177
61715	168	62102	160	63460	181	65090	177
61716	168	62103	160	63462	181	65091	177
61717	168	62104	160	63463	181	65182	177
61718	168	62105	160	63464	181	65382	177
61719	168	62106	160	63473	182	65384	177
61721	168	62107	160	63558	170	65385	177
61730	168	62108	160	63559	170	65386	177
61732	168	62110	160	63560	170	65387	177
61733	168	62111	160	63561	170	65388	177
61734	168	62112	160	63562	170	65392	177
61745	168	62113	160	63564	170	65481	176
61751	173	62301	161	63565	170	65482	176
61756	174	62302	161	63710	178	65483	176
61757	174	62303	161	63711	178	65484	176
61801	169	62305	161	63712	178	65485	176
61802	169	62306	161	63713	178	65486	176
61803	169	62307	161	63853	171	65487	176
61804	169	62308	161	63854	171	65488	176
61805	169	62309	161	63855	171	65490	176
61806	169	62312	161	63856	171	65491	176
61809	169	62313	161	63857	171	65492	176
61811	169	62316	161	63860	171	65531	176
61814	169	62317	161	63861	171	65532	176
61818	169	62318	161	63862	171	65533	176
61819	169	62322	161	63863	171	65534	176
61820	169	62323	161	63864	171	65535	176
61821	169	62324	161	63865	171	65536	176
61823	169	62325	161	63866	171	65537	176
61824	169	62326	161	63873	170	65538	176
61825	169	62327	161	63884	170	65540	176
61845	169	62328	161	63885	170	65541	176
61846	169	62329	161	63886	170	65542	176
61851	173	62330	161	63887	170	65543	176
61856	175	62331	161	63888	170	65544	176

Art. no	Page	Art. no	Page	Art. no	Page	Art. no	Page
80102	54	81232	56	81722	58	82319	53
80103	54	81233	56	81724	58	82320	53
80104	54	81236	56	81726	58	82321	53
80105	54	81237	56	81802	59	82322	53
80302	54	81238	56	81803	59	82323	53
80303	54	81239	56	81804	59	82324	53
80304	54	81240	56	81805	59	82331	53
80305	54	81241	56	81806	59	82338	53
80602	54	81244	56	81807	59	82339	53
80603	54	81245	56	81809	59	82345	53
80604	54	81246	56	81811	59	82346	53
80605	54	81247	56	81814	59	82348	53
80702	54	81248	56	81818	59	82606	54
80703	54	81249	56	81819	59	82607	54
80704	54	81250	56	81820	59	82608	54
80705	54	81304	57	81821	59	82609	54
81002	55	81305	57	81822	59	82610	54
81003	55	81306	57	81823	59	82611	54
81004	55	81307	57	81824	59	82706	54
81005	55	81308	57	81825	59	82707	54
81006	55	81309	57	81826	59	82708	54
81007	55	81310	57	82002	52	82709	54
81008	55	81311	57	82003	52	82710	54
81009	55	81312	57	82004	52	82711	54
81010	55	81313	57	82005	52	83212	67
81011	55	81316	57	82006	52	83213	67
81106	54	81317	57	82007	52	83214	67
81107	54	81320	57	82008	52	83215	67
81108	54	81321	57	82009	52	83216	67
81109	54	81324	57	82010	52	83217	67
81110	54	81326	57	82011	52	83218	67
81111	54	81331	57	82102	53	83306	54
81204	56	81334	57	82103	53	83307	54
81206	56	81336	57	82104	53	83308	54
81207	56	81339	57	82105	53	83309	54
81209	56	81454	57	82106	53	83310	54
81210	56	81455	57	82107	53	83311	54
81211	56	81458	57	82108	53	83403	67
81212	56	81461	57	82109	53	83405	67
81213	56	81703	58	82110	53	83407	67
81214	56	81704	58	82111	53	83423	68
81215	56	81705	58	82303	53	83425	68
81216	56	81707	58	82305	53	83427	68
81217	56	81708	58	82306	53	83712	65
81218	56	81709	58	82307	53	83713	65
81219	56	81710	58	82308	53	83714	65
81220	56	81711	58	82309	53	83715	65
81221	56	81713	58	82310	53	83716	65
81222	56	81714	58	82311	53	83717	65
81223	56	81715	58	82312	53	83718	65
81224	56	81716	58	82313	53	83719	65
81225	56	81717	58	82314	53	83720	65
81226	56	81718	58	82315	53	83721	65
81229	56	81719	58	82316	53	83803	60
81230	56	81720	58	82317	53	83804	60
81231	56	81721	58	82318	53	83805	60

Art. no	Page	Art. no	Page	Art. no	Page	Art. no	Page
83806	60	85355	63	90468	211	91066	152
83807	60	85356	63	90471	94	91067	152
83833	59	85358	63	90472	94	91068	152
83834	59	85359	63	90473	94	91069	152
83835	59	85360	61	90765	230	91070	152
83836	59	85362	61	90767	230	91071	152
83837	59	85365	61	90768	230	91072	152
83838	59	85367	61	90769	230	91073	152
83839	59	85368	61	90770	230	91096	51
85032	64	85369	61	90771	230	91097	50
85033	64	85370	61	90881	93	91098	50
85034	64	90072	95	90882	93	91099	50
85035	64	90074	95	90883	93	91100	50
85036	64	90075	95	90884	93	91102	51
85037	64	90076	95	90885	93	91103	197
85038	64	90077	95	90886	93	91104	197
85042	64	90078	95	90887	93	91105	197
85044	64	90080	94	90888	93	91106	197
85045	64	90081	94	90891	93	91152	93
85046	64	90082	94	90892	93	91153	93
85047	64	90083	94	90893	93	91154	93
85072	64	90084	94	90932	24	91155	93
85075	64	90085	94	90933	24	91156	93
85132	64	90086	94	90934	24	91157	93
85134	64	90092	94	90935	24	91158	93
85300	62	90094	94	90936	24	91164	96
85301	62	90095	94	90980	33	91165	96
85302	62	90096	94	90981	33	91166	96
85303	62	90097	94	90982	33	91167	96
85304	62	90098	94	90983	33	91168	96
85305	62	90253	131	90984	33	91169	96
85306	62	90254	131	90985	33	91170	96
85307	62	90255	131	90986	33	91171	96
85308	62	90282	92	90987	33	91172	96
85309	62	90401	93	90988	33	91173	96
85320	60	90402	93	90989	33	92100	227
85321	60	90403	93	91031	95	92101	227
85322	60	90404	93	91032	95	92102	227
85323	60	90405	93	91033	95	92103	227
85324	60	90406	93	91034	95	92104	227
85325	60	90407	93	91035	95	92105	227
85326	60	90408	93	91036	95	92106	227
85330	61	90409	93	91037	95	92107	227
85332	61	90410	93	91038	95	92108	227
85333	61	90411	93	91039	95	92109	227
85334	61	90412	150	91041	95	92110	228
85335	61	90452	94	91042	95	92112	228
85337	61	90453	94	91043	95	92120	229
85338	61	90454	94	91044	95	92122	229
85339	61	90455	94	91045	95	92123	229
85340	61	90456	94	91046	95	92124	229
85350	63	90457	94	91047	95	92125	229
85351	63	90458	94	91048	95	92126	229
85352	63	90465	211	91049	95	92127	229
85353	63	90466	211	91064	152	92128	229
85354	63	90467	211	91065	152	92129	229

Art. no	Page	Art. no	Page	Art. no	Page
92132	230	241.576.00.1	218	602.022.00.1	220
92140	234	241.577.00.1	219	602.030.00.1	218
92142	234	242.520.00.1	95	602.032.00.1	222
92143	234	242.521.00.1	95	602.283.00.1	180
92144	234	242.807.00.1	225	602.285.00.1	182
92145	234	362.848.26.1	91	602.287.00.1	182
92146	234	362.851.26.1	91	602.295.00.1	180
92147	234	362.856.26.1	90	602.507.00.5	21
92148	234	362.857.26.1	91	602.508.00.5	21
92149	234	461.082.00.1	221	602.509.00.5	21
92150	235	461.095.00.2	236	603.022.00.1	220
92152	235	461.096.00.2	236	603.030.00.1	218
92153	235	461.128.00.2	237	603.032.00.1	222
92154	235	600.021.00.1	94	603.508.00.5	21
92155	235	600.022.00.1	94	604.030.00.1	218
92156	235	600.023.00.1	94	604.032.00.1	222
92157	235	600.024.00.1	94	604.508.00.5	21
92158	235	600.025.00.1	94	605.030.00.1	218
92159	235	600.026.00.1	94	605.032.00.1	222
94862	219	600.027.00.1	94	605.508.00.5	21
94863	219	600.028.00.1	94	606.032.00.1	222
94864	219	600.029.00.1	94	606.508.00.5	21
94865	219	600.030.00.1	94	607.508.00.5	21
94866	219	600.031.00.1	94	611.011.21.2	233
94882	224	600.032.00.1	94	611.021.21.2	232
94883	224	600.033.00.1	94	611.061.00.2	225
94884	224	600.034.00.1	94	611.603.22.2	130
94885	224	601.022.00.1	220	611.605.BM.1	147
94886	224	601.030.00.1	218	611.610.BM.1	147
94887	224	601.032.00.1	222	612.011.21.2	233
94888	224	601.508.00.5	21	612.021.21.2	232
94902	221	601.720.00.1	206	612.061.00.2	225
94903	221	601.731.00.1	92	613.011.21.2	233
94904	221	601.732.00.1	92	613.021.21.2	232
94905	221	601.733.00.1	92	613.061.00.2	225
94915	233	601.736.00.1	209	614.061.00.2	225
94916	233	601.737.00.1	210	615.061.00.2	225
94917	233	601.738.00.1	209	616.061.00.2	225
94922	226	601.741.00.1	93	632.001.00.1	172
94923	226	601.744.00.1	211	632.006.00.1	172
94924	226	601.801.00.1	89	632.007.00.1	171
94925	226	601.802.00.1	205	632.008.00.1	171
94926	226	601.805.00.1	205	632.856.00.1	183
94927	226	601.813.00.1	89	632.859.00.1	183
94928	226	601.815.00.1	89		
94935	227	601.850.26.1	90		
94936	227	601.851.26.1	90		
94937	227	601.852.26.1	90		
94938	227	601.853.26.1	90		
94942	226	601.854.26.1	90		
94943	226	601.855.26.1	90		
94944	226	601.857.26.1	90		
94945	226	601.858.26.1	148		
94946	226	601.859.26.1	90		
94947	226	601.860.26.1	90		
94948	226	601.861.26.1	90		

Geberit Sales Ltd
Geberit House
Edgehill Drive
Warwick
CV34 6NH

T 01926 516 800
F 01926 400 101
In Eire +44 (0)1926 516 800
Literature 0800 007 5133
enquiries@geberit.co.uk

→ www.geberit.co.uk